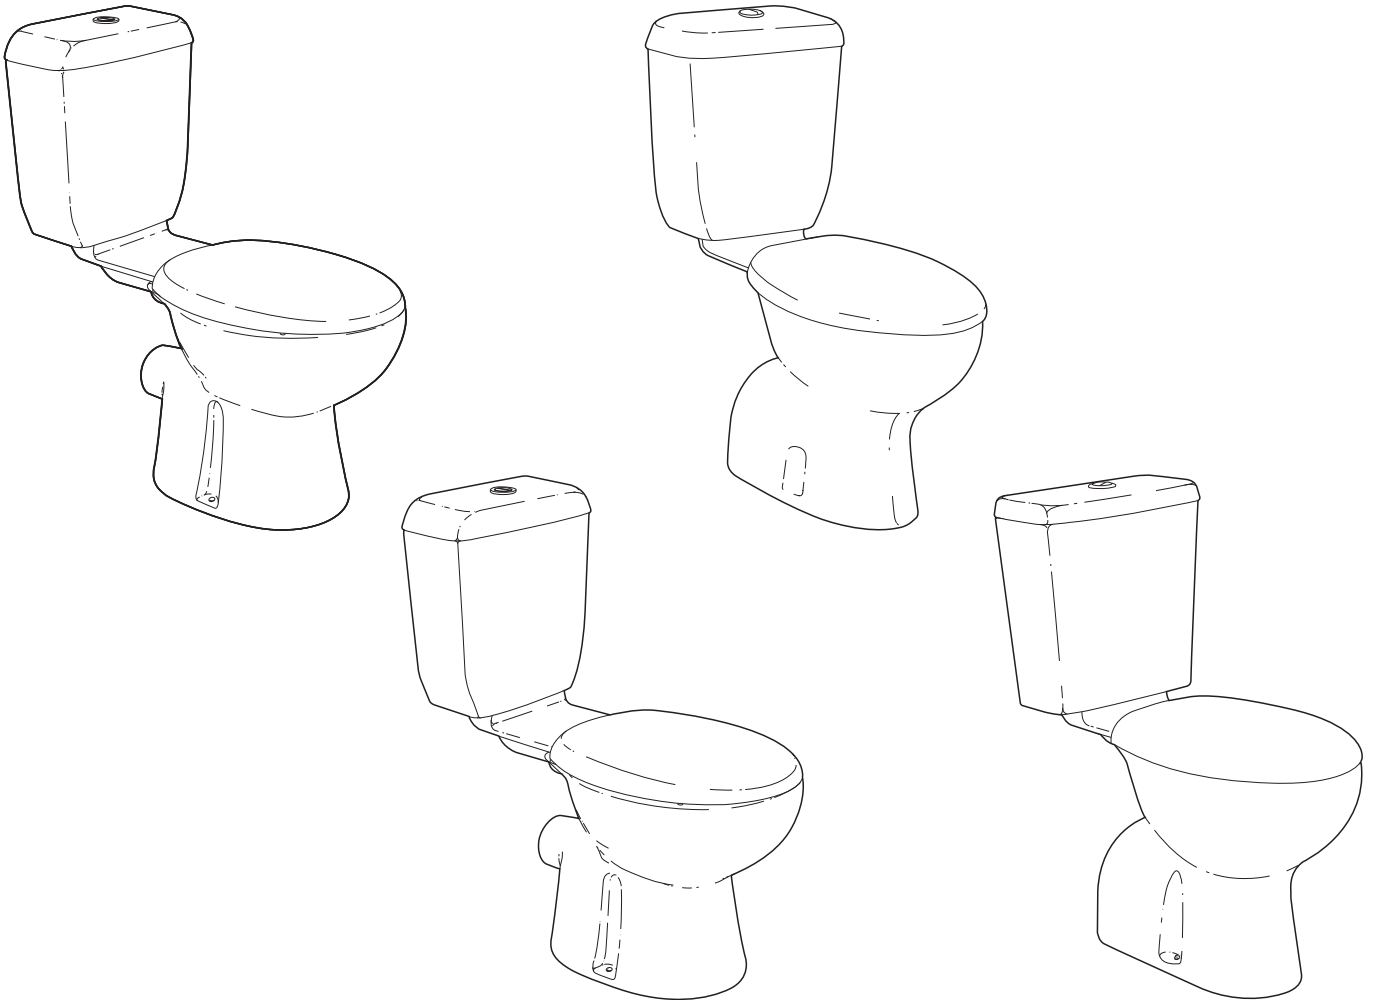


Posh Solus Concealed S Trap & P Trap Link Toilet Suite



Installation Instructions - Pan & Cistern



The installation of this Toilet Suite shall be in line with the normal minimum requirements in AS/NZS 3500

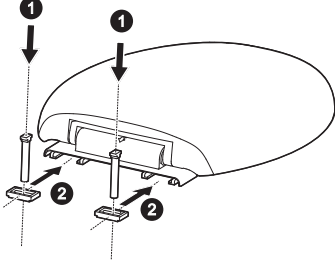
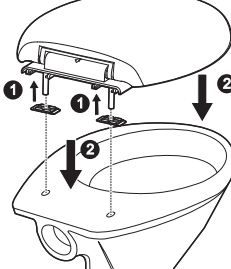
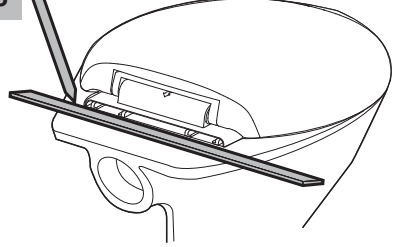

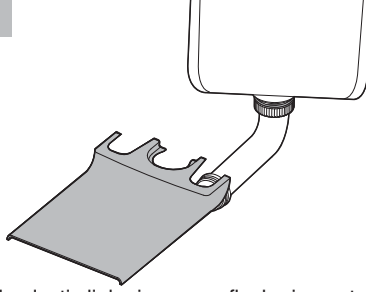
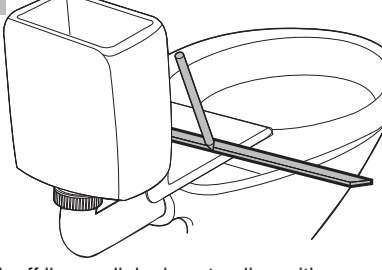
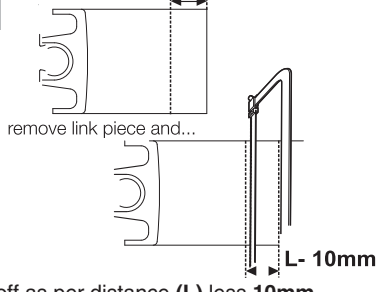
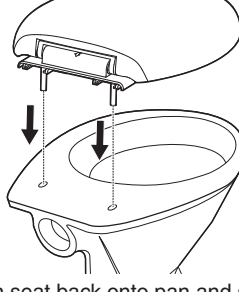

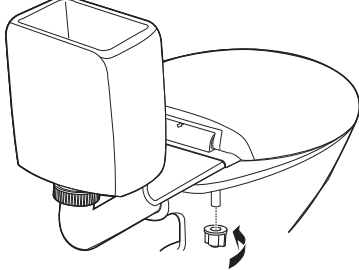
1. Position pan onto pan connector and mark off position of pan fixing holes.
2. Remove pan and drill holes in position marked.
3. Apply flexible sealant to base of pan and carefully position pan onto pan connector and screw pan into pre-drilled holes using corrosion resistant screws (not supplied).
4. Remove excess sealant.
5. Place suite in position. Mark out the fixing holes for the cistern.



For timber stud and non-structural walls, the cistern should be fixed to a noggin or solid wall.

6. If required, modify flush pipe to fit pan and cistern.
Note: The inlet valve can be changed from right to left hand side. Right side position supplied.
7. To install the link piece, flush pipe and seat, refer to the instructions below.

Installation Instructions - Toilet Seat & Link

<p>1</p>  <p>Fit plastic bolts and slide nuts onto seat.</p>	<p>2</p>  <p>Position seat onto pan and align correctly.</p>	<p>3</p>  <p>Draw line across back edge of the seat hinge. Platform and remove seat.</p>
<p>4</p>  <p>Once flush pipe has been cut to correct length, lubricate and fit keeseal to pipe. Mount cistern onto wall at recommended height. Once this is done, fit and tighten plastic flush pipe nut.</p>	<p>5</p>  <p>Slide plastic link piece over flush pipe nut until it locks into position.</p>	<p>6</p>  <p>Mark off line on link piece to align with previously drawn line (Diagram 3).</p>
<p>7</p>  <p>remove link piece and...</p> <p>Cut off as per distance (L) less 10mm. Reinstall link piece.</p>	<p>8</p>  <p>Reposition seat back onto pan and slightly tighten seat fixing bolts.</p>	<p>9</p>  <p>Slide/position seat into link piece.</p>
<p>10</p>  <p>Fully tighten bolts to lock seat and link into position. Ensure all connections are secure and water tight.</p>		

Care Details

We recommend the use of soapy water or approved cleaners. This product should not be cleaned with abrasive materials. Damage caused by any improper treatment is not covered by the product warranty. Refer to Warranty Conditions

Plumbers, please ensure a copy of the installation instruction is left with the end user for future reference.