


Pure Elemental

Sink Progressive Mixer Set Pull Out Spray

SUSSEX

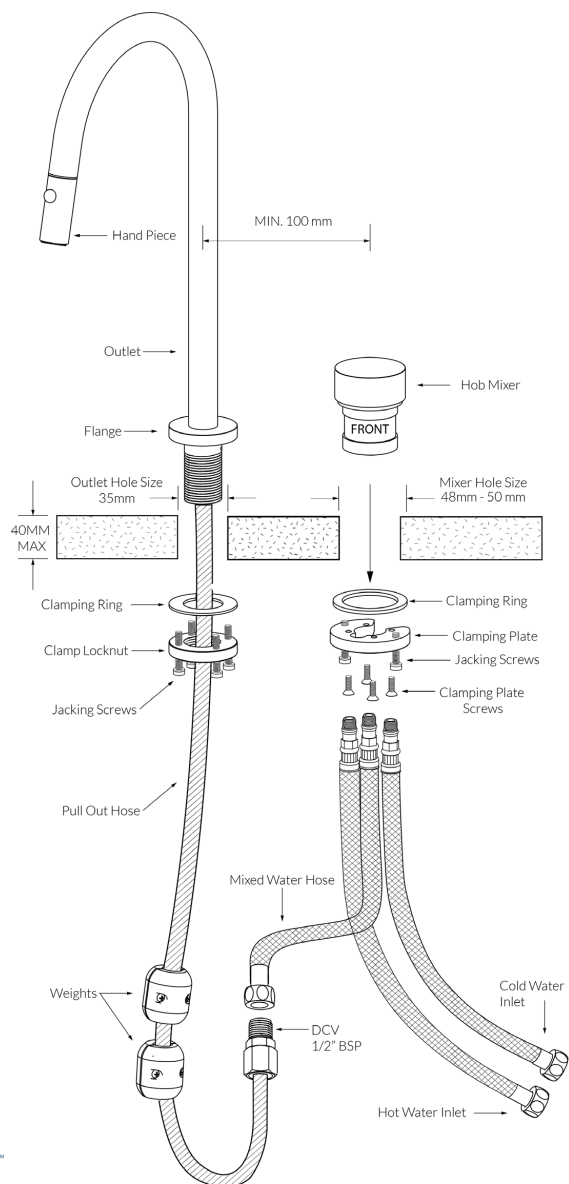

Product codes:

MPSPMSP05.01-E

Mounting Surface Requirements:

- Outlet: 35mm Clearance Hole.
- Hob Mixer: 48mm - 50mm Clearance Hole.
- Minimum Distance between Outlet and Mixer is 100mm centre to centre.
- Maximum Mounting Surface thickness is 40mm.
- Mounting Surface must be flat and level.
- Ensure adequate space under the bench for the Pull-Out Hose and Weights to sit free from obstruction. Failing to do so will affect the performance of the Pull-Out function.

Outlet:

- Remove Weights from the Hose.
- Remove the Clamp Locknut and Clamping Ring from the Flange.
- Pass the Pull-Out Hose with the Dual Check Valve (DCV) fitting attached through the Mounting Surface.
- Working from underneath, fit the Clamping Ring and Clamp Locknut to the Flange.
- Wind the Locknut as far as possible, then using a 6mm Allen Key tighten the 4 Jacking Screws to secure the Outlet (tighten well).
- Re-attach the Weights to the Pull-Out Hose.

Note: The Weights must always be suspended and never resting on any surface.

Hob Mixer (Progressive):

- Prior to installing remove the Clamping Plate and Ring. The Flexible Tails are labelled and are factory fitted, there is no need to remove from Mixer Body.
- Apply a small amount of Sealant to the under side of the Hob Mixer Flange to seal the Mounting Surface.
- Lower the Hob Mixer through the Mounting Surface.

Note: The "FRONT" label must be positioned to face the user.

- Working from underneath, fit the Clamping Ring over the Mixer Body. Align and secure the Clamping Plate to the Mixer Body by tightening the 4 Screws.
- Secure the Mixer to the Mounting Surface by tightening the 2 Jacking Screws using a 5mm Allen Key (tighten well).
- Fix the Hot and Cold Hoses to 1/2" BSP Water Connections.

Note: Stop Cocks are recommended.

- Attach the "MIXED WATER HOSE" to the DCV.
- Once all connections are made allow Water Flow and check function of the mixer. Check for leaks.

Plumbers note:

Tapware is to be installed by a Licenced Plumber in accordance with AS/NZS 3500:2025

Recommended working water pressure 300-500kpa.

Maximum water temperature is 65 deg.C.



www.reece.com.au



While we aim to ensure the specifications shown are correct at time of printing, Sussex Taps reserves the right to make modifications without prior notice. Always use the physical product for accurate measurements. Dimensions are subject to change without notice. All measurements are shown in millimetres. This product complies with lead free requirements.

Copyright © Sussex Taps