

# Lever Action 150mm Pillar Tap Aerated

Enware's lever action tapware has been designed to be durable, functional and easy to use and control. The simple lever action provides hands free elbow operation suitable for sterile environments where hygiene is critical.

Ideal for medical, surgical and laboratory use, as well as hygienic commercial food preparation.

## FEATURES

- Hygienic 150mm lever allows hands-free elbow operation
- Serviceable with all wearing components replaceable, thus providing an even longer life
- Cold supplied standard, request hot or warm when ordering
- Heavy duty bright chrome finish
- WELS 3 Star (7.7 lpm) water efficiency rating supplied as standard. Also available in 5 Star (5.9 lpm) and 6 Star (3.6 lpm) ratings: request when ordering

## OPTIONS

- Attachments such as anti-vandal aerator or ablution, contact Enware for more information

# HOS327



## Product Codes

<b>HOS327</b>	150mm Lever ¼ Turn Ceramic Disc
<b>JHS327</b>	150mm Lever ¼ Turn Jumper Valve




## Technical Information

Working Pressure Range	50-800kPa
Ceramic Disc	500kPa Max (PCA)*
Working Pressure Range Jumper Valve	30-1200kPa
	500kPa Max (PCA)*
Maximum Working Temperature*	Ceramic Disc - 85°C
	Jumper Valve - 95°C

\*Enware products are to be installed in accordance with the Plumbing Code of Australia and AS/NZS3500. Thermostatic mixing valves may be required. Reference should also be made to the Australasian Health facility Guidelines (AushFG), ABCB Regulations and Local Building Codes when considering the choice of, and the installation of these products.

NOTE: Enware Australia advises:  
1. Due to ongoing Research and Development, specifications may change without notice.  
2. Component specifications may change on some export models.  
3. Refer to Warranty Statement for Warranty details [www.enware.com.au/warranty](http://www.enware.com.au/warranty)

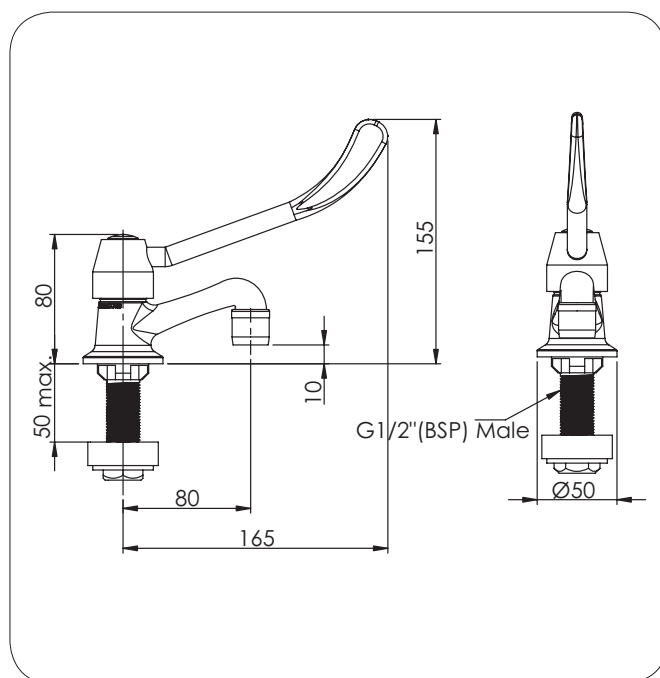

Version: Oct 17

**Call 1300 369 273**  
**[www.enware.com.au](http://www.enware.com.au)**

Enware Australia Pty Limited  
9 Endeavour Rd Caringbah NSW 2229 Australia  
Ph: 02 8536 4000 Fax: 02 8556 4055

