




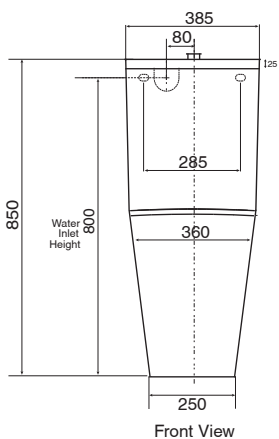
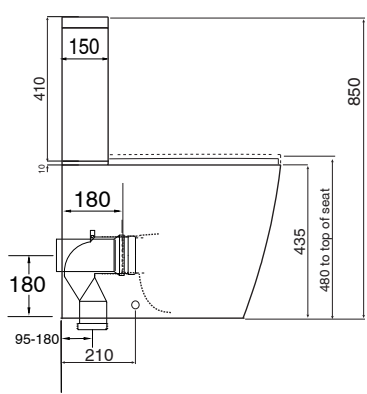




WOLFEN™

# Wolfen Ambulant Close Coupled Back to Wall Double Flap Toilet Suite (4 Star)

| Model                | Wolfen Ambulant Close Coupled Back to Wall Double Flap Toilet Suite<br>White (4 Star)    | Wolfen Ambulant Close Coupled Back to Wall Double Flap Toilet Suite<br>Blue (4 Star)     | Wolfen Ambulant Close Coupled Back to Wall Double Flap Toilet Suite<br>Grey (4 Star)     |
|----------------------|--|--|--|
|                      |         |         |       |
| Product Code         | 1806671  | 1806672  | 1806673  |
| Material             | Pan: Vitreous China<br>Cistern: Vitreous China<br>Seat: Urea with Stainless Steel Hinges | Pan: Vitreous China<br>Cistern: Vitreous China<br>Seat: Urea with Stainless Steel Hinges | Pan: Vitreous China<br>Cistern: Vitreous China<br>Seat: Urea with Stainless Steel Hinges |
| Product Features     | Meets AS1428.1 Ambulant design for access and mobility requirements.                     | Meets AS1428.1 Ambulant design for access and mobility requirements.                     | Meets AS1428.1 Ambulant Ddesign for access and mobility requirements.                    |
| Colour               | Cistern & Pan: White<br>Seat: White  | Cistern & Pan: White<br>Seat: Blue   | Cistern & Pan: White<br>Seat: Grey   |
| Weight               | Cistern: 19kg<br>Pan: 33kg (Load/bearing capacity 400kg)<br>Seat: 2.8kg                  | Cistern: 19kg<br>Pan: 33kg (Load/bearing capacity 400kg)<br>Seat: 2.8kg                  | Cistern: 19kg<br>Pan: 33kg (Load/bearing capacity 400kg)<br>Seat: 2.8kg                  |
| Water Inlet Position | Back Inlet   | Back Inlet   | Back Inlet   |
| Toilet Seat          | Double Flap Seat   | Double Flap Seat   | Double Flap Seat   |
| Cistern Button       | Raised Height in White   | Raised Height in Blue  | Raised Height in Grey  |
| Rim Configuration    | Box Rim  | Box Rim  | Box Rim  |
| Outlet Type          | Universal S & P  | Universal S & P  | Universal S & P  |
| S Trap Setout (mm)   | 95 min - 180 max   | 95 min - 180 max   | 95 min - 180 max   |
| P Trap Setout (mm)   | 180 mm   | 180 mm   | 180 mm   |
| Inlet Valve Pressure | 500 kPa  | 500 kPa  | 500 kPa  |
| Pan Fixing           | Screwed to floor using brackets supplied and bedded with sealant.                        | Screwed to floor using brackets supplied and bedded with sealant.                        | Screwed to floor using brackets supplied and bedded with sealant.                        |
| Cistern Fixing       | Bolted to Pan  | Bolted to Pan  | Bolted to Pan  |
| Standards            | AS1172   | AS1172   | AS1172   |



Dimensions are nominal measurements only.

**Disclaimer:** Products in this specification manual must by regulation be installed by licensed and registered trade people. The manufacturer/distributor reserves the right to vary specifications or delete models from their range without prior notification. Dimensions are nominal measurements only. Dimensions and set-outs listed are correct at time of publication however the manufacturer/distributor takes no responsibility for printing errors.

Published 26/08/2020