


Franke Steel Pull Out Sink Mixer

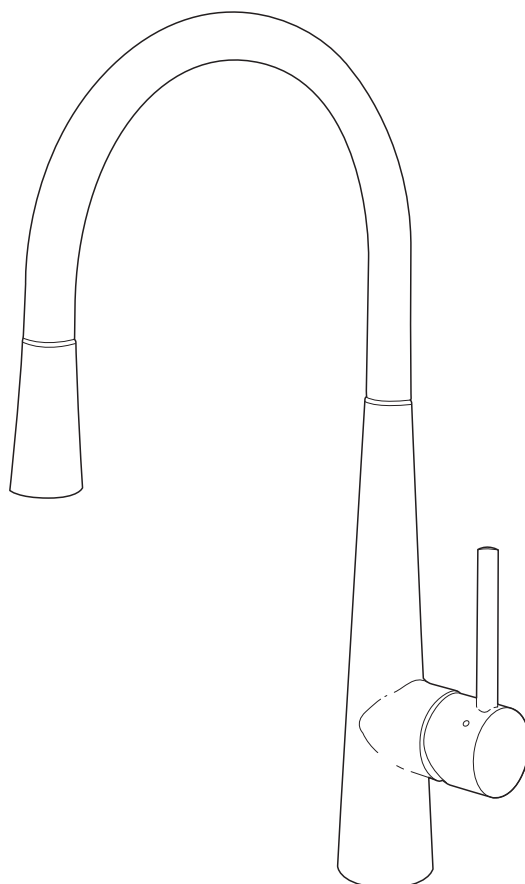

Technical Information

- Maximum hot temperature 80° (Recommended 65°)
- Maximum operating pressure 75 psi / 500 kpa
- Minimum operating pressure 7.25 psi / 50 kpa
- Ceramic cartridge

Franke Care Instructions

- Periodically clean the aerator filter;
- Install filter valves under the sink and periodically clean the filters;
- Do not use detergents, solvents, chemical agents, abrasive sponges, wire wool or alcohol, etc which would irreparably damage the surface of the product and ruin it's appearance, sheen and matt finishes;
- Clean with soapy water and dry with a soft cloth.
- Dry the product after use if the water is very hard aggressive, as it may leave deposits which would damage the surface;
- Do not install the tap when the water pressure exceeds 500 kpa

Installation

Kitchen Tap

≤5 bar
≤70° C

1

2

3

4

5

6

Plumbers, please ensure a copy of the installation instruction is left with the end user for future reference.

