


# **FLOW**

## **WALL BATH OLET SQUARE SLIT BOX**







<b>SPECIFICATIONS</b>	
Recommended Use	Domestic, hotel and commercial
Finish Available	Chrome
Suitable Hot Water	Storage Tank: Yes Continuous Flow: Refer to manufacturer of continuous hot water systems Gravity Feed: Yes
Standards	AS/NZS 3718

## **CLEANING RECOMMENDATIONS**

We recommend the use of soapy water or approved cleaners. This product should not be cleaned with abrasive materials. Damage caused by any improper treatment is not covered by the product warranty- refer to Warranty Conditions.



To see the complete FLOW range go to www.reece.com.au/bathrooms





## **FLOW** WALL BATH OUTLET SQUARE SLIT BOX


## **INSTALLATION INSTRUCTIONS**

## **Important Note**

Mixer must be installed to the requirements of AS/NZS 3500 by a qualified plumber. Your mixer comes to you already factory assembled and tested. We do not recommend the dismantling of any internal part of the mixer. The mixers are factory tested and sealed so as to give the best performance.



INSTALLATION INSTRUCTIONS FLOW WALL OUTLET

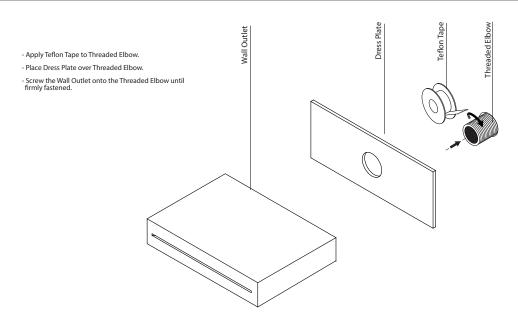



NOTE:
If the pressure exceeds or is likely to exceed 550kpa,
an approved pressure limiting device must be
nstalled.
Flush out all pipe work prior to installation.
If the water temperature exceeds 75°C, an

- If the water temperature exceeds () approved tempering valve must be fitted. Installation should comply with Australian standard AS350.1 or relevant local authority requirements. Showers may not be suitable for use within:

   Gravity-fed water systems

Pressure supply less than 150kPa; NOTE: The 500kPa maximum water supply pressure does not apply to fire service outlets

WARRANTY: Please refer to the full warranty statement enclosed with the product before installing. Or visit www.phoenixtapware.com.au to download a

- caused in this way will not be covered by warranty.

(03) 9780 4200 www.phoenixtapware.com.au

