



DUAL HANDED ELECTRIC



ELECTRIC



DELIVERY



CYLINDER
WARRANTY^{1,2}



INSTALLATION³



DUAL
HANDED

Everhot dual handed electric water heaters feature a durable vitreous enamel lining, and reliable performance you expect from a product manufactured by Rheem. They offer outstanding value, and come in a wide range of models with a capacity to suit most domestic applications.

FEATURES

- Complete model range (25L – 400L)
- Fast, easy like-for-like replacement
- Dual handed inlet and outlet fittings
- Mains pressure
- 25L – 125L models feature compact dimensions and easy to access fittings
- Plug in models available in 25L and 50L³
- 160L – 400L models suit connection to concessional (off-peak) tariffs
- Twin element models available in 250L, 315 and 400L
- 7 year cylinder warranty¹ on 25L and 50L models
- 10 year cylinder warranty² on 80L, 125L, 160L, 250L, 315L and 400L models
- Full warranty support through a comprehensive national service network




Excludes 25L, 50L,
80L and 125L electric
vitreous enamel models.

SPECIFICATIONS		25L	50L	80L	125L	160L	250L	315L	400L
Everhot Dual Handed Electric – Single Element	Model	291025 291025/P ³	291050 291050/P ³	281080	281125	271160	291250	291315	291400
Everhot Dual Handed Electric – Twin Element							292250	292315	292400
Hot Water Delivery	Litres	25	50	80	125	160	250	315	400
Boost Capacity	Litres	–	–	–	–	–	50	50	90
kW Rating	1.8	–	–	–	✓	–	–	–	–
	2.4	✓	✓	–	–	✓	–	–	–
	3.6	✓	✓	✓	✓	✓	✓	✓	–
	4.8	–	–	–	–	–	✓*	✓	✓
	Relief Valve Setting	kPa	1000	1000	1000	1000	1000	1000	1000
Expansion Control Valve (kPa)	kPa	850	850	850	850	850	850	850	850
Max Water Supply Pressure:									
with ECV (kPa)	kPa	680	680	680	680	680	680	680	680
without ECV (kPa)	kPa	800	800	800	800	800	800	800	800
Water Hot and Cold Connections		Rp ¾	Rp ¾	Rp ¾	Rp ¾	Rp ¾	Rp ¾	Rp ¾	Rp ¾
Dimensions									
A	mm	430	695	875	1250	1610	1395	1640	1840
B	mm	400	400	460	480	480	640	640	690
C	mm	436	436	492	515	515	680	680	730
D	mm	106	397	475	852	1332	1112	1317	1479
E	mm	142	142	194	195	104	73	113	121
F	mm	60	60	112	112	66	103	103	105
G	mm	–	–	–	–	–	988	1228	1323
H	degrees	26	26	22	22	23	32	32	30
J	degrees	64	59	60	60	58	88	88	83
M	degrees	–	–	–	–	58	92	92	97
Approx. Weight (inc. packaging)	kg	19	26	32	45	59	82	97	120

Technical data is subject to change.

*4.8kW element rating not available in 250L twin element model range.

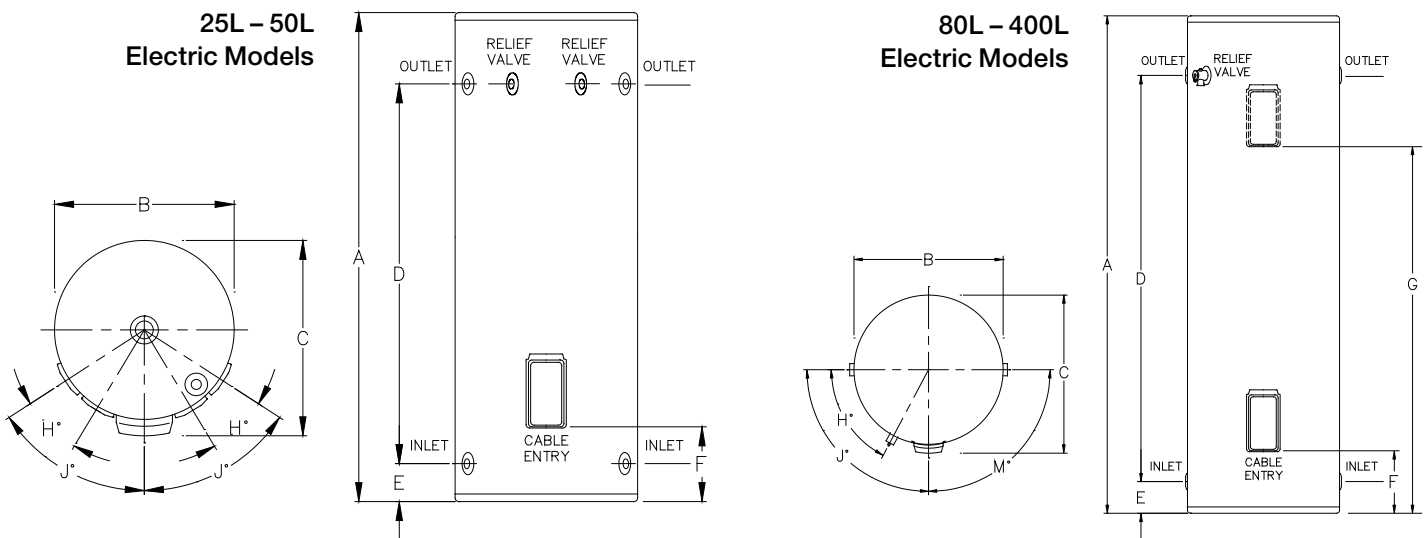

- Warranty (25L and 50L): 7 Years on Cylinder, 1 Year Labour on Cylinder, 1 Year Parts and Labour warranty on all other components for Domestic (non-Commercial) installations. Conditions apply. See the Everhot warranty set out in the Owner's Guide and Installation Instructions or view online at www.reece.com.au/Everhot
- Warranty (80L, 125L, 160L, 250L, 315L and 400L): 10 Years on cylinder, 1 Year Labour on Cylinder, 1 year Parts and Labour warranty on all other components for Domestic (non-Commercial) installations. Conditions apply. See the Everhot warranty set out in the Owner's Guide and Installation Instructions or view online at www.reece.com.au/Everhot
- 25 and 50 litre flex and plug models may only be used indoors

