



Flex Hoses Gas

Specification Sheet



SPECIFICATIONS

Application	Natural Gas, LPG or Town Gas
Features	BIM-MEP ^{aus} models available
Working Pressure	2600 kPa
Temperature Range	Class D -20deg C to +125 deg C
Materials	Hose Inner - Nitrile Rubber Outer Braid - Stainless Steel End Fittings - DR Brass Ferrules - Stainless Steel
Standards	AS/NZS 1869
Licence	AGA Approval No. 7854
Hose Class	Class D

WARRANTY

Product Warranty	3 Years
-------------------------	---------



Disclaimer: Products in this specification manual must by regulation be installed by licensed and registered trade people. The manufacturer/distributor reserves the right to vary specifications or delete models from their range without prior notification. Dimensions are nominal measurements only. Dimensions and set-outs listed are correct at time of publication however the manufacturer/distributor takes no responsibility for printing errors.

Published 21/10/2019

Don't risk it, use a licensed plumber.™






Flex Hoses Gas

Dimensions

Product Code	Product Description	Size	Length	Inside Diameter
		(inch)	(mm)	(mm)
107611	Dura Flex Hose 10mm Gas (1/2" MxF) 450mm	1/2	450	10
107612	Dura Flex Hose 10mm Gas (1/2" MxF) 600mm	1/2	600	10
107613	Dura Flex Hose 10mm Gas (1/2" MxF) 900mm	1/2	900	10
107614	Dura Flex Hose 10mm Gas (1/2" MxF) 1000mm	1/2	1000	10
107615	Dura Flex Hose 10mm Gas (1/2" MxF) 1200mm	1/2	1200	10

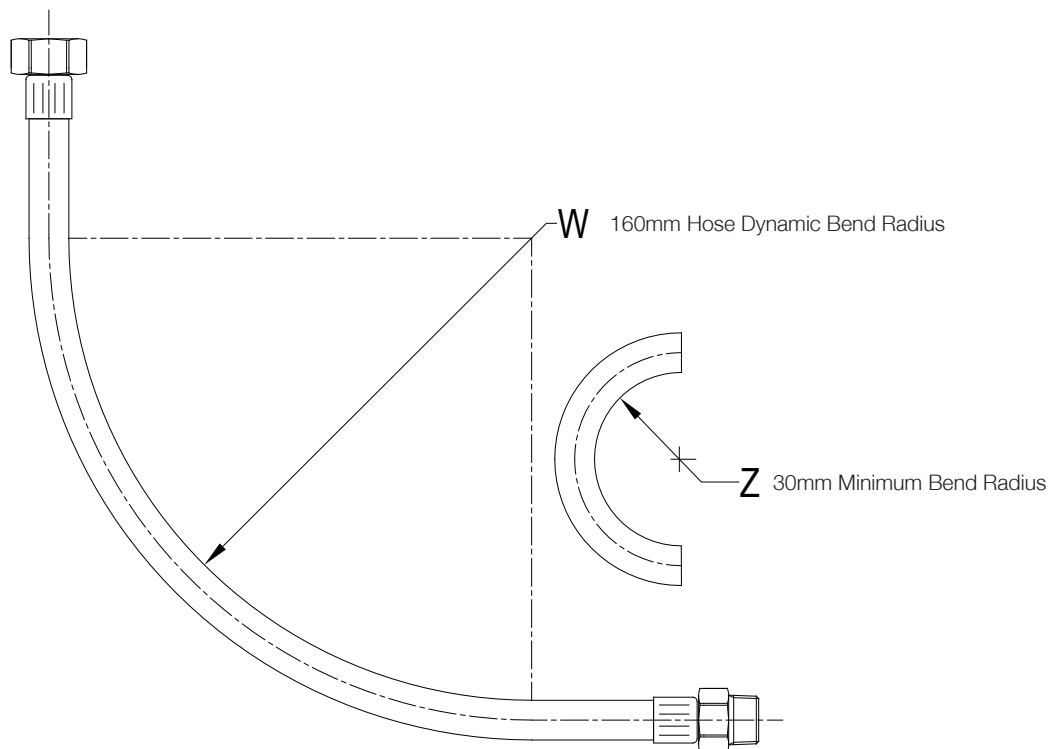



Flex Hoses Gas

Installation Notes

- Tighten 1/2" female cone nut to 30Nm and 1/2" male BSPT thread to 20Nm tightening torque
- The Installer is responsible for ensuring proper installation of the product
- Ensure that all threads are clean and that the seals are undamaged
- Ensure that there are no leaks after installation
- This product is only to be used on Natural Gas, LPG or Town Gas
- Product is only to be installed where it can be easily checked
- Don't stretch, twist or excessively bend hose