



RECYFIX®STANDARD 100

RECYFIX®STANDARD 100, trafficable, Type 01 with slotted Stainless Steel Heel Guard grating SS304, locked, 1,0 m

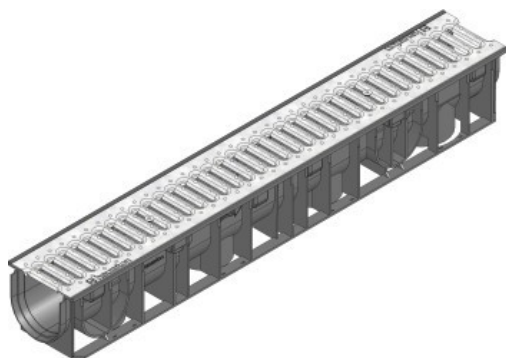

*Sustains
car traffic*

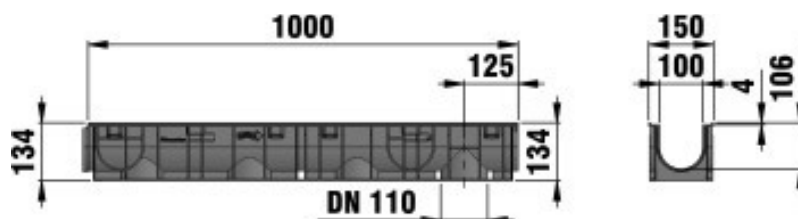

■ Technical data:

Length mm	Width mm	Height mm	Weight kg	Inlet cross-section cm ² /m	Internal channel cross-sect. cm ²	Inlaying depth	Item-no.
1000	150	134	3,99	280	92	3	47316

■ Product description:

RECYFIX STANDARD 100 type 01- channel made of modified PP, according to EN 1433, with vertical connection possibility DN/OD 110, with slotted heel guard grating, stainless steel, with locking device, trafficable, locked, L/W/H 1000x150x134 mm, item no. 47316

■ Material:

- **Channel body:** recycled, modified Polypropylene
- **Bolts:** Stainless steel
- **Locking handle:** RECYFIX Material (recycled PA)
- **Grating:** strip Stainless steel

■ Type acc. DIN EN 1433:

M

■ Application areas:

- Architecture and Design
- Stations and platforms
- Facades
- Flat roofs, terraces, balconies
- Public places
- Communal facilities
- Parks and gardens
- Underground parking
- Home and garden



The optimal use of the product in the aforementioned applications depends on various factors (positioning, traffic load and frequency,...). Our experts will be happy to advise you!