













The world's no.1 mini pump becomes the guietest in its class! Featuring an acoustic damper, anti vibration tubing & bracket, the Silent+ Mini Orange is whisper quiet.



12L/h max. flow

CONDENSATE REMOVAL PUMP



10m max. rec. head (flow rate 6L/h)



19dB(A)

KEY FEATURES


- Quietest in its class
- Submersible secondary reservoir included
- Plug & play


SUITABILITY







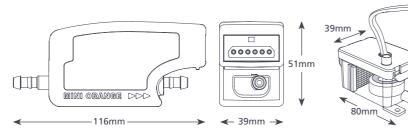



SILEINI - IVIIINI ORANGE SPECIFICATIONS		
Max. flow	12L/h @ 0 head	
Max. rec. head	10m	
Max. suction lift	2m	
Sound level@1m	19dB(A)	
Power supply	230 VAC, 0.11A, 16W 50/60Hz	
Rated	Non continuous	
Class	II appliance \Box	
Max. unit output	16kW / 54,000Btu/h	
Max. water temp	40°C / 104°F	
Discharge tube	6mm ID	
IP Protection	IP21	
Safety switch	3.0A Normally closed	
Thermal protection	✓	
Fully potted	✓	

SILENT+ MINI ORANGE OPTIONS

Silent⁺ Mini Orange FP3313

† Pump only

SUGGESTED XTRA ACCESSORIES			
Description		Part No.	
1 Amp Fuse		FP2620	
Tube To Soil Stack Adaptor		FP2038	

Vinyl Tube Braided AX5100 1/4" (6mm)

Inline Filter 16mm

4.3m mini/maxi orange extension kit



FP2940

FP2640

sales@aspenpumps.com

For more installation accessories take a look at our Aspen Xtra range

IN THE BOX

Silent⁺ Mini Orange pump • 1.5m Plug & play power cable • Acoustic damper and 1m orange discharge tube with connector • Anti vibration bracket • Reservoir • Reservoir lid with 1.5m sensor cable • Submersible reservoir • Anti siphon device • Float & filter • 1.5m Suction tube 6mm ID • 220mm Orange inlet hose 14mm ID • 150mm Vinyl breather tube 6mm ID • Drain connector kit • Fixing kit • Install manual

Download manual at aspenpumps.com

View install video at aspenpumps.com



Self priming







