

## Model RBA1015-600



### Materials & Features

Self-closing tap is designed for public washrooms, offices, schools, shopping centres, stadiums, airports & accessible installations. Single connection, tap will deliver cold or pre mixed water, single temperature only. Tap is activated by pushing/pulling the lever, flow will cease when preset time is achieved. Tap cartridge is self-cleaning. Black plastic cover on handle for safety and luminance contrast.

### Technical Detail

Tap Body:	DZR Brass, Chrome plated
Inlet Connection:	15mm BSP (1/2")
Flow Time:	4-10 seconds (non-adjustable)
Operating Pressure:	200 – 500 kPa
Supply:	Single temp (Max. 55oC)
Flow Rate:	4.5L per minute
WELS Rating:	6 Star
Locknut:	Brass
Force to activate:	9N @ 400 kPa
WELS Reg. number	T08715

### Available Models


**RBA1015-600** 6 Star [4.5Lpm] Self Closing Lever Tap

### Related Products

**RBA1083-999-010** Heavy Duty Brass Locknut (add-on for installations in vandal prone areas)  
**RBA8867-100** 'Benefit' Accessible Stainless Steel Basin  
**RBA8889-182** 'Curvalinear' Accessible Stainless Steel Basin

**Note:** For Australia, Installation shall be in accordance with the PCA [Plumbing Code of Australia] and any relevant local authority requirements.

**Important:** Installation instructions and current rough-in details should be furnished with each fixture. Do not rough in without certified dimensions. Dimensions are subject to manufacturer's tolerance of +/-10mm.

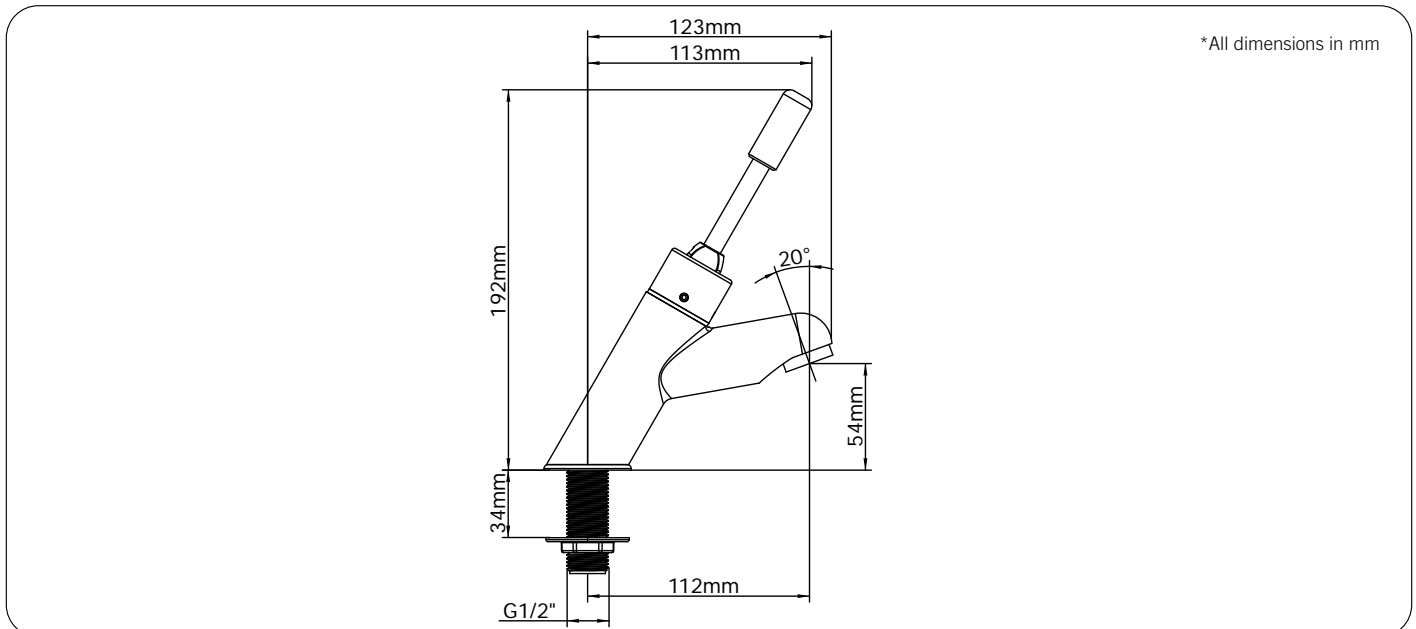

As improvements in the design and performance of RBA products are continuous, specifications may be subject to change without notice. The illustrations and descriptions herein are applicable to production as of the date of this Technical Data Sheet. Revised 02/22 © 2022 by RBA Group TD/Model RBA1015-600/0222