

HRT/4-450/30 BPN


IP54



Dimensiones y conexiones
Dimensions and wiring

Características Characteristics

Tensión Voltage	3 ~ 230/400V 50Hz	
Tipo motor Motor type	4 polos 4 poles	IP54 cl.F
Potencia absorbida máxima Maximum power absorbed	0,48 kW	
Intensidad absorbida máxima Maximum absorbed current	1,5/0,9 A	
Condensador Capacitor		
Ia/In Is/In	3,1	
Temperatura del aire Air temperature	-40°C < T < +70°C	
Peso Weight	10,5 kg	
Código ventilador Fan code number	5700203200	
Código motor Motor code number	0342497005	

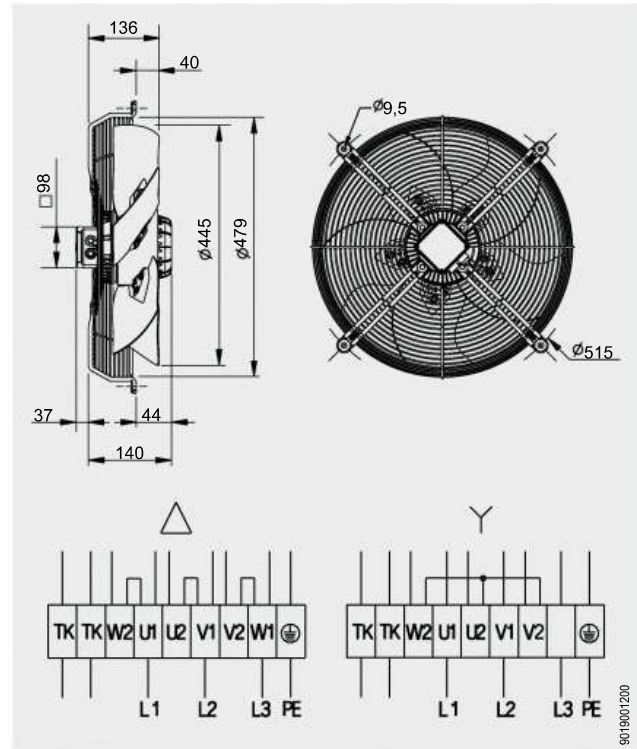


Curvas características / Performance curves (19/04/2012)

	Fan data	ErP	
		2013	2015
Installation category	A		
Efficiency category	Static		
VSD must be installed with the fan	No		
Specific ratio	1		
Overall efficiency [%]	27,5	27,3	31,3
Efficiency grade	36,2	36,0	40,0
Absorbed power [kW]	0,426		
Air volume [m ³ /h]	3977		
Static pressure [Pa]	106		
Speed [RPM]	1308		

* Data at optimum efficiency working point
Norma ensayo: **ISO 5801**
Ventilador probado sin reja y con embocadura
Test standard: **ISO 5801**
Fan tested without guard and with bellmouth entry

Espectro de potencia (LwA) en dB(A) en la aspiración en punto de trabajo de presión baja (L), media (M), alta (H)

Sound power spectrum (LwA) in dB(A), at the fan inlet in low(L), medium(M) or high(H) pressure working point.

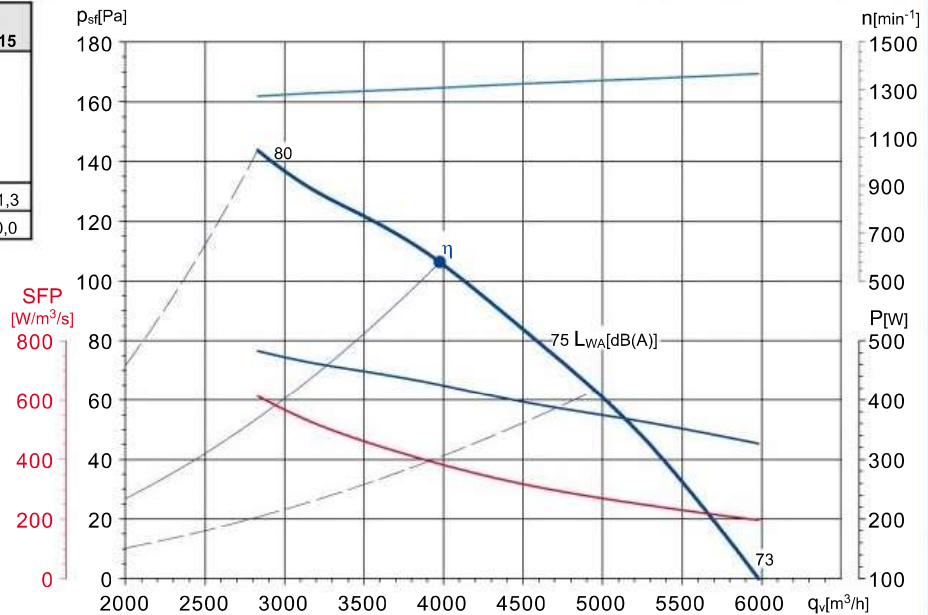

Hz	63	125	250	500	1000	2000	4000	8000	LwA
L	43	55	61	66	68	67	63	57	73
M	45	57	63	68	70	69	65	59	75
H	56	64	69	73	75	74	70	63	80



Soler&Palau
Ventilation Group