

450+ STAINLESS STEEL 5 STAR GAS STORAGE



GAS



5 STAR
RATING



3 - 6
PEOPLE¹⁷



450L+
FIRST HOUR
CAPACITY¹⁸



10
YEAR
CYLINDER
WARRANTY¹⁶



NEW Everhot 450+ Stainless Steel Gas Storage water heater provides a first hour delivery of over 450 litres of 45°C hot water¹⁸.

The inbuilt tempering provides tempered (maximum 50°C) hot water without the need for a separate tempering valve.

The unique 'dual temperature' feature allows you to plumb tempered hot water (maximum 50°C) to fixtures used for personal hygiene, and full temperature 75°C hot water to where it's needed most (kitchen and laundry).

5 Star energy efficiency to save money.

FEATURES


- 450L+ first hour hot water delivery (45°C)¹⁸
- Dual temperature capability:
 - Tempered 50°C maximum side outlet
 - Full temperature 75°C top outlet, no need for a separate tempering valve
- Stainless steel cylinder resists corrosion longer than traditional enamelled steel
- No anode, for lower maintenance costs
- 5 Star energy efficiency
- Lighter than traditional enamelled steel cylinder models, for easier installation
- Rp³/₄" female water connections, for easier installation
- 10 Year Cylinder Warranty¹⁶
- Made in Australia
- Natural Gas only
- Full warranty support through a comprehensive national service network



SPECIFICATIONS

450+ Stainless Steel Gas	Everhot Model Number	2AG450N0
	Reece Product Code	1360669
AGA Gas Energy Rating		5 stars
Installation		External only
Suitable for no. of people¹⁷		
Moderate Climate		3-6
Cool Climate		3-5
Storage Capacity	Litres	155
Recovery Rate @ 45°C Rise	L/hr	185
First Hour Capacity ¹⁸	Litres	450
Gas Type		Natural Gas Only
Hourly Gas Consumption		
Natural Gas	MJ	40
Max. Supply Pressure		
with ECV	kPa	960
without ECV	kPa	1120
T&PR Valve Setting	kPa	1400
Water Connection		
Cold Inlet		Rp ¾
Outlet - Top (Maximum 75°C)		Rp ½
Outlet - Side (Maximum 50°C)		Rp ¾
Gas Connection		Rp ½" Flare Compression
Dimensions		
A	mm	1635
B	mm	520
C	mm	610
D	mm	330
E	mm	360
F	mm	840
G	mm	415
H	mm	52
J	mm	263
Approx. Weight (inc. packaging)	kg	65

Technical data is subject to change.

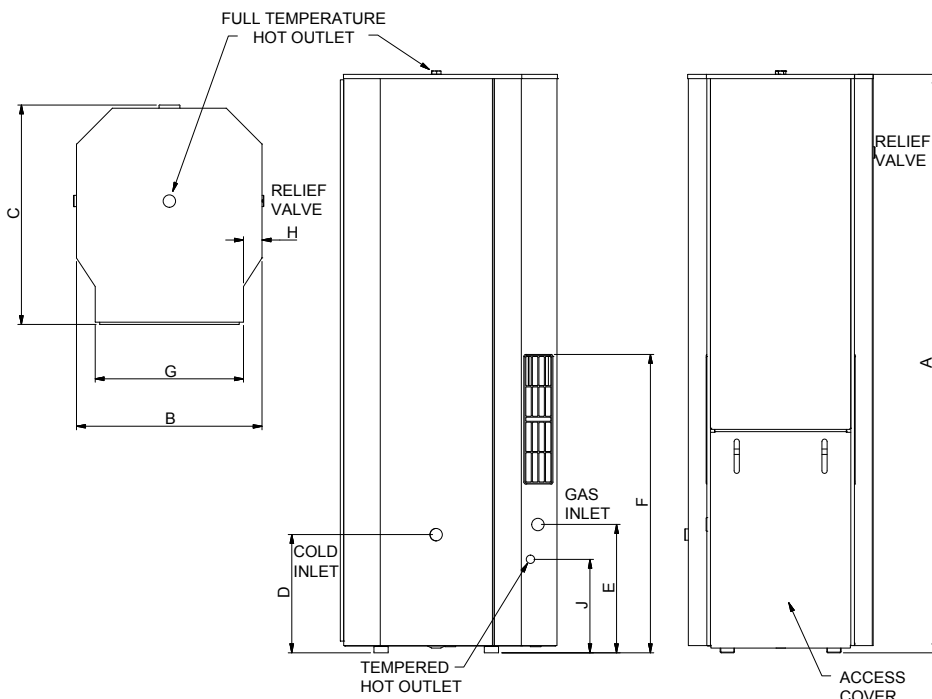

High delivery, stainless steel quality plus unique dual temperature capability.

The NEW Everhot 450+ Stainless Steel gas storage water heater's unique technology enables first hour delivery of over 450 litres of 45°C hot water¹⁸.

Inbuilt tempering capability limits outlet water temperature to a maximum of 50°C in accordance with AS 3498.

When the 'dual temperature' feature (using BOTH the tempered and full temperature hot water outlets) is used, the tempered lower side outlet may be plumbed to sanitary fixtures used for personal hygiene (as required by AS/NZS 3500.4), usually in the bathroom, while the full temperature 75°C top outlet may be plumbed to the kitchen & laundry, where hotter water is required.

Everhot Stainless Steel water heaters are not recommended for installation in some areas.

Refer to www.reece.com.au/Everhot for details of areas not recommended and where, if installed, product is not covered by warranty.

- Warranty: 10 years parts on cylinder, 1 years parts and labour on all other components, for Domestic (non-Commercial) installations. Conditions apply. See the Everhot warranty set out in the Owner's Guide and Installation Instructions or view online at www.reece.com.au/Everhot.
- Guide only, subject to individual hot water consumption patterns.
- First Hour Capacity of at least 450L of hot water delivered at 45°C from the tempered outlet, based on 20°C inlet cold water and maximum gas control setting. First hour capacity is the storage capacity plus nominal first hour recovery rate at a delivered temperature of 45°C, from 20°C inlet water and at maximum gas control setting.
- ECV not supplied.

