




PERFORMA

Specification Sheet

Dura PEX Flex Hose Water Nylon Low-Temp Lead Free

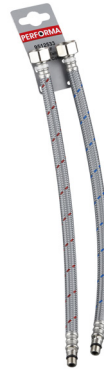

SPECIFICATIONS

Application	General hot and cold water applications (above ground)
Features	Female hex rubber cone seal
Working Pressure	1400 kPa
Temperature Range	5 deg C to 70 deg C
Materials	<p>Hose Inner Material - Cross-linked polyethylene (PEX) tube</p> <p>Outer Braid - Nylon</p> <p>End Fittings - Stainless Steel</p> <p>Ferrules - Lead Free Brass</p>
Standards	AS/NZS 3499
Watermark	WMKA20101

SPECIFICATIONS

Product Warranty	15 Years
-------------------------	----------



Disclaimer: Products in this specification manual must by regulation be installed by licensed and registered trade people. The manufacturer/distributor reserves the right to vary specifications or delete models from their range without prior notification. Dimensions are nominal measurements only. Dimensions and set-outs listed are correct at time of publication however the manufacturer/distributor takes no responsibility for printing errors.

Published 29/01/2025

Don't risk it, use a licensed plumber.™




WaterMark
AS/NZS 3499
WMKA20101






Dura PEX Flex Hose Water Nylon Low-Temp Lead Free


DIMENSIONS				
Product Code	Product Description	Size (inch)	Length (mm)	Inside Diameter (mm)
9512520	Dura Pex Flex Hose Water 150mm Nylon Low-Temp Lead Free	1/2	150	12.5
9512521	Dura Pex Flex Hose Water 225mm Nylon Low-Temp Lead Free	1/2	225	12.5
9512522	Dura Pex Flex Hose Water 300mm Nylon Low-Temp Lead Free	1/2	300	12.5
9512523	Dura Pex Flex Hose Water 450mm Nylon Low-Temp Lead Free	1/2	450	12.5
9512524	Dura Pex Flex Hose Water 600mm Nylon Low-Temp Lead Free	1/2	600	12.5
9512525	Dura Pex Flex Hose Water 1000mm Nylon Low-Temp Lead Free	1/2	1000	12.5
9512526	Dura Pex Flex Hose Water 1500mm Nylon Low-Temp Lead Free	1/2	1500	12.5
9512527	Dura Pex Flex Hose Water with Elbow 225mm Nylon Low-Temp Lead Free	1/2	225	12.5
9512528	Dura Pex Flex Hose Water with Elbow 300mm Nylon Low-Temp Lead Free	1/2	300	12.5
9512529	Dura Pex Flex Hose Water with Elbow 450mm Nylon Low-Temp Lead Free	1/2	450	12.5
9512530	Dura Pex Flex Hose Water with Elbow 600mm Nylon Low-Temp Lead Free	1/2	600	12.5
9512531	Performa Mixer Tap Extension Hose 150mm Nylon Low-Temp Lead Free	1/2	150	12.5
9512532	Performa Mixer Tap Extension Hose 250mm Nylon Low-Temp Lead Free	1/2	250	12.5
9512533	Performa Mixer Tails Hot & Cold Nylon Low-Temp Lead Free	1/2	300	12.5

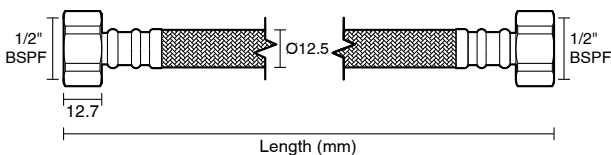


Dura Pex Flex Hose Water Nylon Low-Temp Lead Free

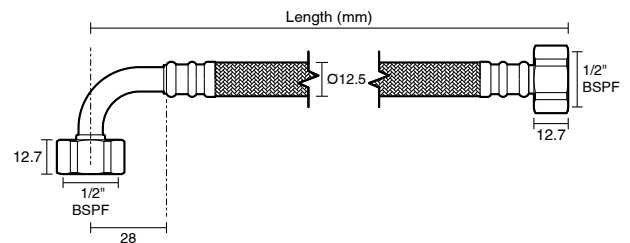

Dura Pex Flex Hose Water with Elbow Nylon Low-Temp Lead Free

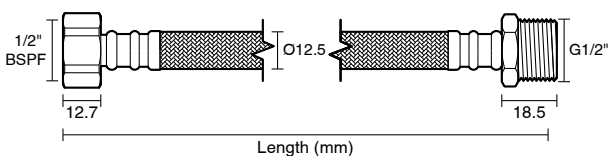

Performa Mixer Tap Extension Hose Nylon Low-Temp Lead Free

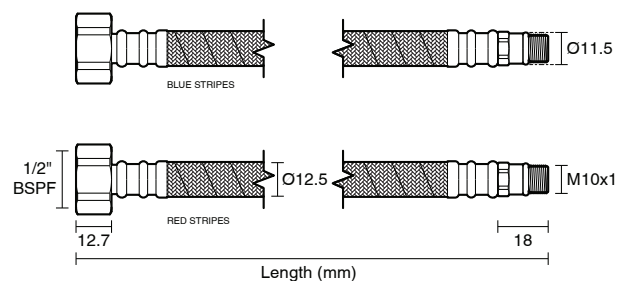

Performa Mixer Tails Hot & Cold Nylon Low-Temp Lead Free



Dura PEX Flex Hose Water Nylon Low-Temp Lead Free

INSTALLATION NOTES

- Tighten female hex nuts (with rubber cone seal) to 10Nm torque
- The installer is responsible for ensuring proper installation of the product
- Ensure that all threads are clean and that seals are undamaged
- Ensure that there are no leaks after installation
- This product is only to be used on potable water
- Don't install this product directly onto hot water units
- Don't stretch, twist or excessively bend hose
- Hoses are designed for applications above ground, accessible and not submerged
- It is recommended to connect to an isolation valve immediately before the hose