


Henden Inverter Heat Pump

Harness the power of this high performing heat pump. Built with inverter technology for energy efficiency and designed for super quiet operation, this sleek and compact heat pump is perfect for Australian residential pools.

- > **Intuitive LED touch display for ease of use**
- > **UV protected and ABS corrosion-resistant casing for increased longevity**
- > **Noise-reducing fan blades for super quiet operation**
- > **Full DC inverter compressor for increased efficiency**
- > **Uses environmentally friendly R32 refrigerant gas**
- > **Built-in timer modes for user flexibility**
- > **Condensation hose port for simple drainage**

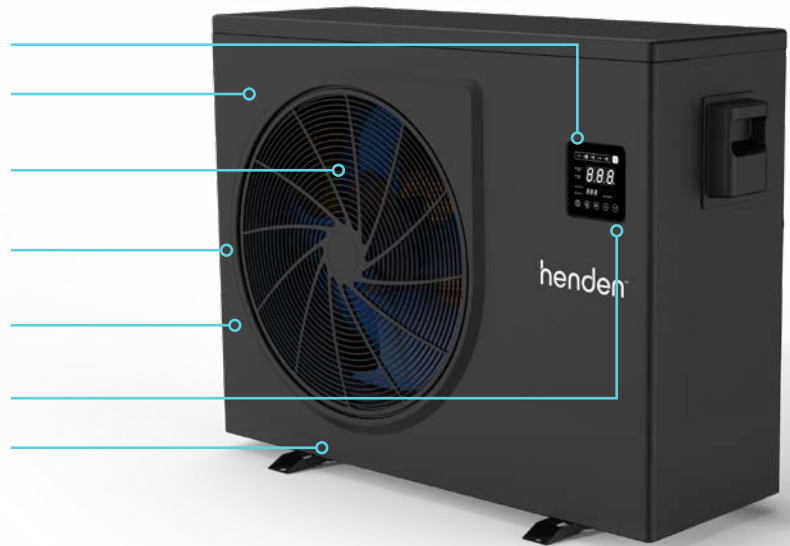

Features

- > **Built with full DC Inverter Compressor**
For quick heating and optimal performance when you need it.
- > **Quiet Operation**
Uniquely shaped fan blades and inverter technology make this one of the quietest heat pumps on the market.
- > **Sleek Design**
Fits easily in any backyard space, whether it's next to the pool or down the side of the house.
- > **Titanium Heat Exchanger**
Allows for optimal heat transfer and increased operating efficiency. Featuring a strong anti-corrosive coating, this heat exchanger works in all levels of water chemistry.
- > **Energy Efficient**
A performance-focused design using R32 refrigerant means energy savings for your customers, resulting in lower running costs.
- > **Wi-Fi enabled**
Built in Wi-Fi and app compatibility makes managing the heat pump simple.



Performance

Performance at conditions: Air 27°C / Water 26°C / Humidity 80%




Heater Model	9kW	13kW	15kW	20kW	24kW
Heating capacity (kW)	1.8 - 9	2.6 - 13.5	2.9 - 15.4	3.7 - 20	6.5 - 24.3
Power input (kW)	0.17 - 1.55	0.24 - 2.33	0.27 - 2.7	0.3 - 3.3	0.45 - 3.74
COP range	10.7 - 5.8	10.8 - 5.8	10.7 - 5.8	12 - 6.1	12.2 - 6.2

Technical Specifications

Heater Model	9kW	13kW	15kW	20kW	24kW
Power supply	230v / 1Ph / 50Hz	230v / 1Ph / 50Hz	230v / 1Ph / 50Hz	230v / 1Ph / 50Hz	230v / 1Ph / 50Hz
Electrical connection	10A	15A	Hardwired	Hardwired	Hardwired
Maximum input current (A)	8	12	14	17	19
Casing	ABS	ABS	ABS	ABS	ABS
Water connection	40mm	40mm	40mm	40mm	40mm
Sounds pressure 1m dB(A)	41 - 52	41 - 52	44 - 55	43 - 56	45 - 56
Ideal water flow	50 lpm	75 lpm	80 lpm	100 lpm	140 lpm

Dimensions

Heater Model	9kW	13kW	15kW	20kW	24kW
Length x width x height	888 x 319 x 609mm	888 x 319 x 609mm	972 x 340 x 766mm	1145 x 465 x 840mm	1115 x 428 x 825mm
Weight	43kg	50kg	61kg	74kg	92kg

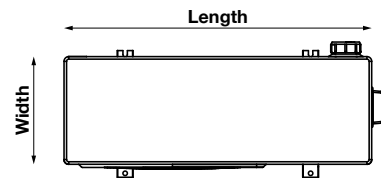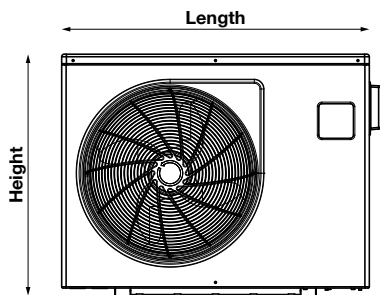

Heat Exchanger