



EVERHOT PRO (HEAVY DUTY ELECTRIC)



ELECTRIC

50L
315L

DELIVERY

3 x 3.6kW
3 x 4.8kW

INPUT¹⁷

INDOOR
OUTDOOR

INSTALLATION

5
YEAR

CYLINDER
WARRANTY¹⁸

Everhot PRO Heavy Duty Electric is a robust commercial water heater range designed to provide between 240 and 560 litres of hot water in the first hour and 190 to 250L/hr recovery hour after hour at 50°C temperature rise.

FEATURES

- Available in the most popular capacities of 50L and 315L with a choice of either 3 x 3.6kW or 3 x 4.8kW elements¹⁷
- Suitable for indoor and outdoor installation
- Direct replacement for the most popular heavy duty electric models
- Heavy duty enamel and larger anode¹⁹ provide long service life
- Trade adjustable thermostats for sanitising applications
- Manifold multiple units together for greater capacity and output
- Mains pressure
- Made in Australia
- 5 year cylinder warranty¹⁸
- Full warranty support through a comprehensive national service network

Product data: page 14



EVERHOT PRO

SPECIFICATIONS		50L	315L
Everhot Model Number		623050	623315
Reece Product Code		1306818	1306819 (3.6kW) and 1306820 (4.8kW)
Everhot PRO Heavy Duty Electric			
Hot Water Delivery	Litres	50	315
First Hour Delivery - 3.6kW	Litres	240	500
First Hour Delivery - 4.8kW	Litres	-	560
Recovery at 50°C rise - 3.6kW	Litres	190	190
Recovery at 50°C rise - 4.8kW	Litres	-	250
T&PR Valve	kPa	1000	1000
ECV Setting	kPa	850	850
Maximum Supply Pressure			
without ECV	kPa	800	800
with ECV	kPa	680	680
Thermostat Setting (Maximum)	°C	75	77
Water Hot and Cold Connections	BSPF	Rp 1 1/4	Rp 1 1/4
T&PR Connection	BSPF	Rp 3/4	Rp 3/4
kW Rating	3.6	✓	✓
	4.8	-	✓
Dimensions			
A	mm	675	1640
B	mm	436	638
C	mm	476	678
D	mm	405	1294
E	mm	90	128
F	mm	80	130
H	degrees	30	32
J	degrees	90	90
Approx. Weight (inc. packaging)	kg	34	96


Technical data is subject to change.

ELECTRICAL CONNECTION


Everhot PRO commercial electric water heaters can be wired using a single phase 240 Volts AC or 3 phase 415 Volts AC "star connected" supply, one phase per element.

MANIFOLD ARRANGEMENT

Hot Header Assembly


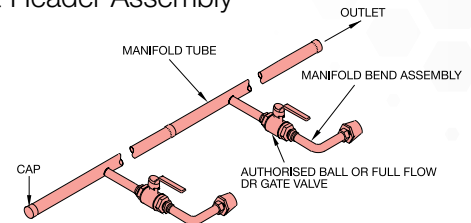


Cold Header Assembly

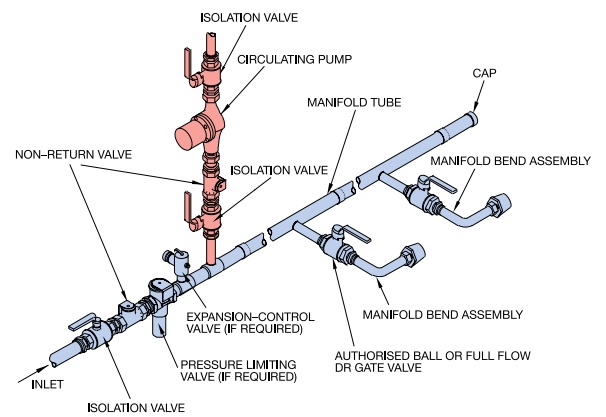

- 3 x 3.6kW available in 50L and 315L. 3 x 4.8kW available in 315L.
- Warranty: 5 Year cylinder warranty, 1 Year parts and labour on all other components in commercial installations. Conditions apply. See the Everhot warranty set out in the Owner's Guide and Installation Instructions or view online at www.reece.com.au/Everhot.
- Black anode suitable up to 600mg/L Total Dissolved Solids only available.

Note: Allow additional top clearance for anode replacement.

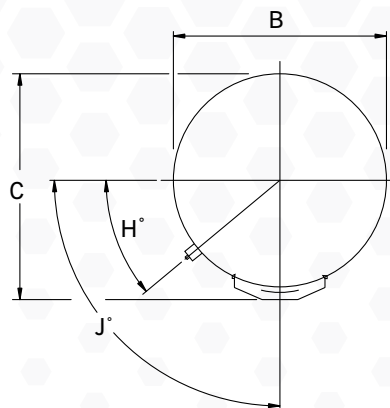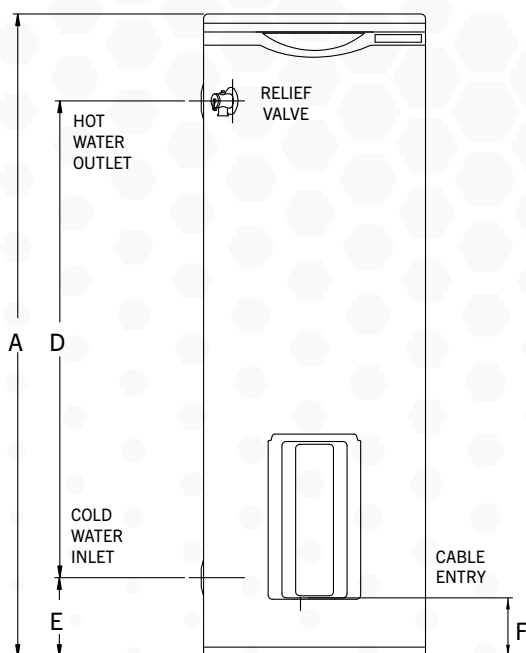

EVERHOT