


Posh Bristol Pin Basin - Bath Wall Mixer Tap Set (5 Star) Lead Free



Prior To Installation

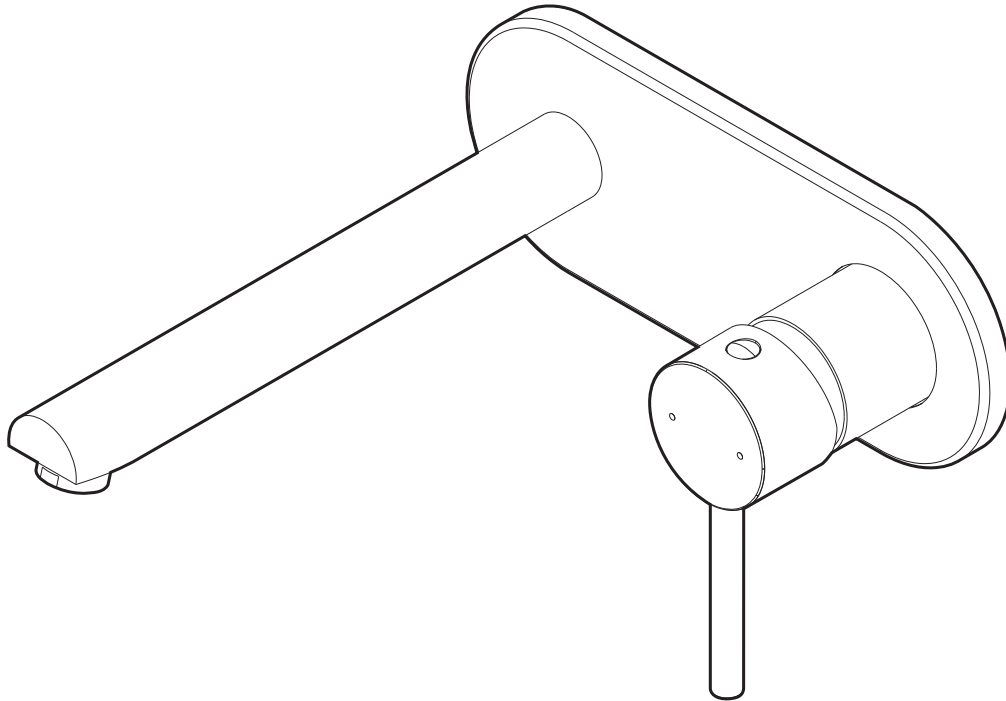

Mixer must be installed to the requirements of AS/NZS 3500 by a qualified plumber. Your mixer comes to you already factory assembled and tested. We do not recommend the dismantling of any internal part of the mixer. The mixers are factory tested and sealed so as to give the best performance.



Avoid prolonged exposure to any chemical solution containing chlorides or acids. Surface damage caused by acids will void warranty.



Do not use steel wool or any abrasive cleansers.



Clean with mild detergent or clear liquid cleansers. Wipe dry with a clean soft cloth.



Flush out new pipe work prior to connecting the new mixer.



In compliance with the lead-free requirements of the National Construction Code Volume 3.



Recommended pressure range 150 – 500KPa.




**Max Continuous Working Pressure 1000 Kpa.
Max Continuous Working temperature 65 Deg.**

Posh Bristol Pin Basin - Bath Wall Mixer Tap Set (5 Star) Lead Free

Diagram

Posh Bristol Pin Basin - Bath Wall Mixer Tap Set (5 Star) Lead Free

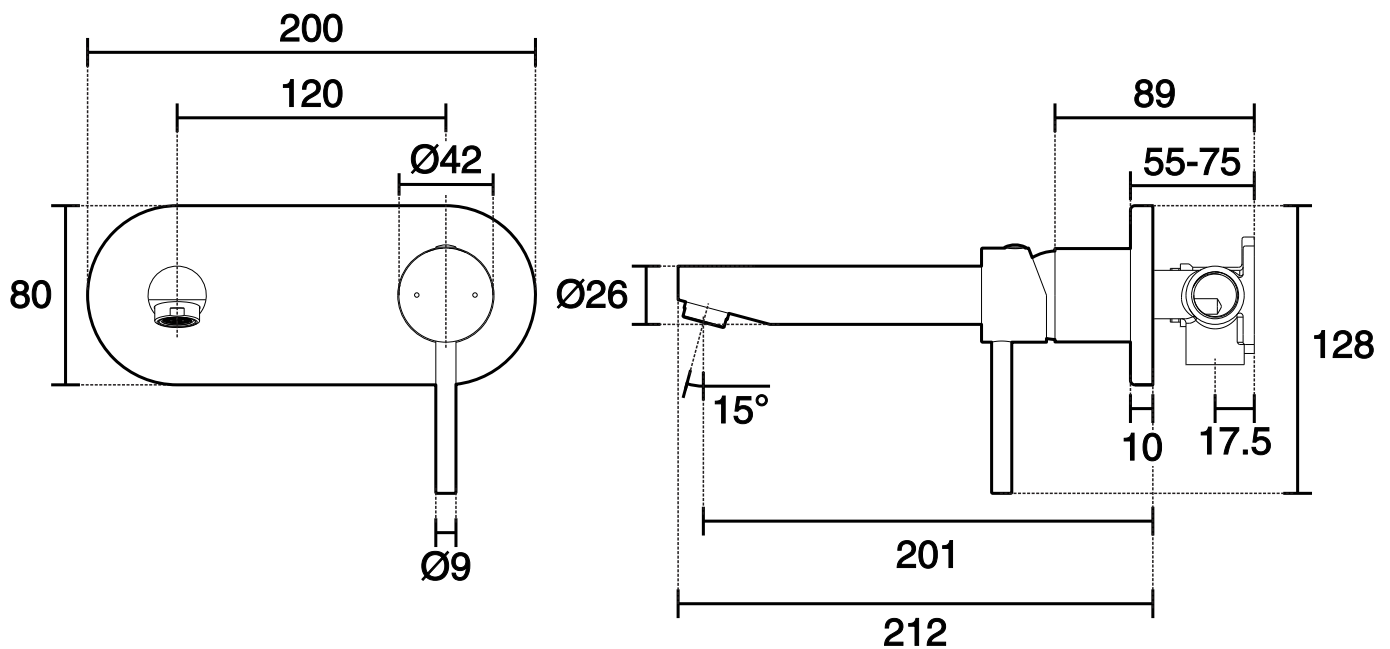

Installation




Waterproofing and sealant materials are used to seal against moisture or water penetration to ensure integrity of the wall sheet lining structure. It must not interfere with the removal of the protective cover and installation of the mixer trim components. The installing plumber is responsible for waterproofing the shower mixer penetration AS 3740 - Waterproofing of Domestic Wet Areas.

Note: This tap is suitable for applications where both hot and cold water supply pressures are at 150kPa and above.



For wall mounted Basin Tapware, consideration should be made to installation height and length of outlet in relation to height and positioning of basin or bath..

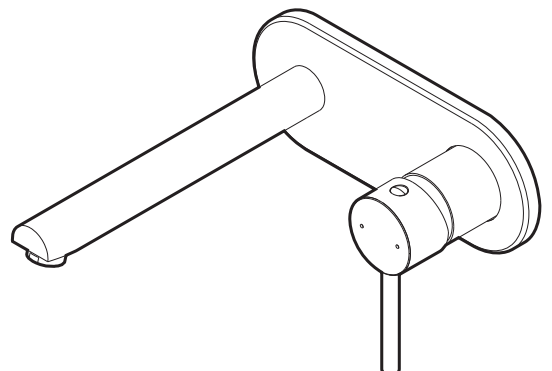

Posh Bristol Pin Basin - Bath Wall Mixer Tap Set (5 Star) Lead Free

Installation


1. Connect Mixer (A) to hot and cold Water Supply (B) as marked on body.
2. Pressure check all connections according to AS/NZS 3500.
3. When the wall is finished (eg. tiled), remove the Protective Covers (C).

Important **Leaking joints are not covered by the warranty.**


Important **For Min /Max installation depth refer to markings on protective cover or technical specifications.**

Important **Waterproofing / sealant materials must be clear of the Protective Cover (B) and the surface it protects (A) to allow for removal of the protective cover and mixer trim set for fit off.**

Note: Ensure Mixer body is level both vertically and horizontally.

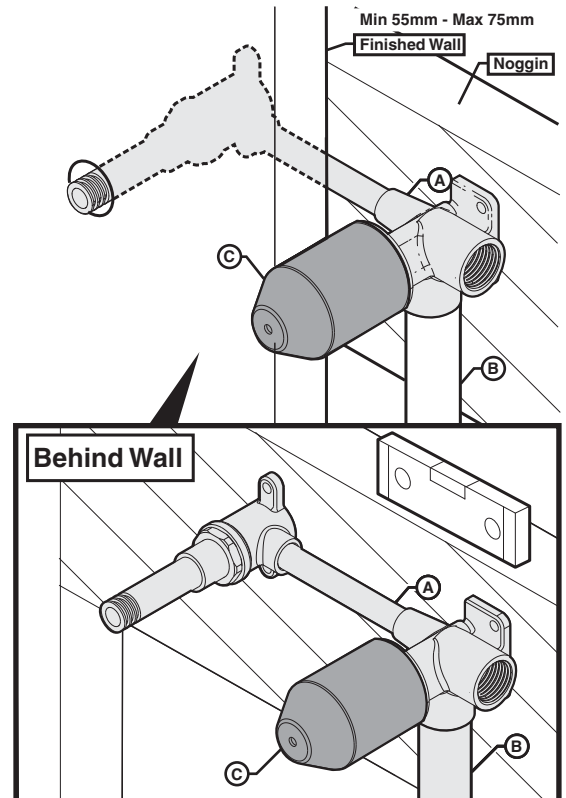



4. Fit the Cover Plate (D).
5. Fit Cartridge Trim (E), Handle (F) and Outlet (G).
6. Secure the Handle (F) and Outlet (G) by tightening the Grub Screws with the supplied Allen key.

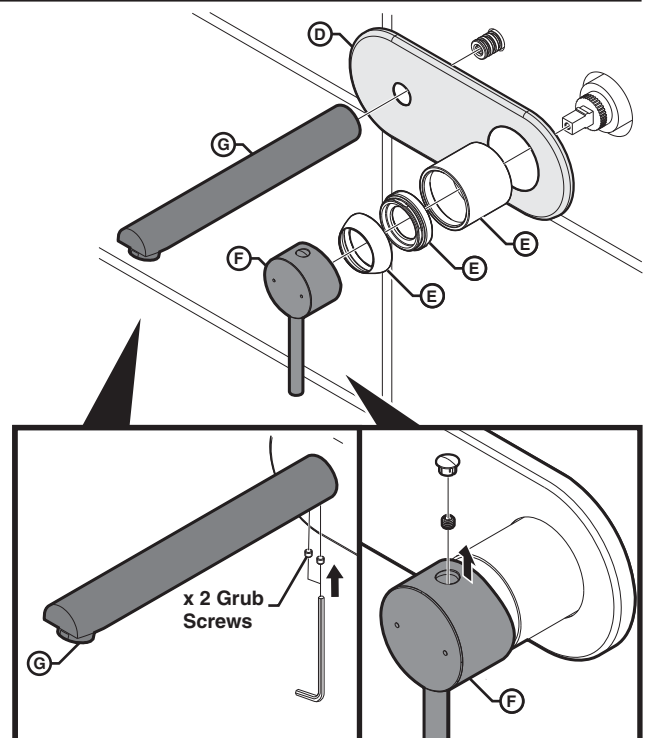

Posh Bristol Pin Basin - Bath Wall Mixer Tap Set (5 Star) Lead Free

Servicing - Replacement of Cartridge

1. Remove Decorative Cover (H) and unscrew the Grub Screw (I) using supplied Allen Key.
2. Lift off the Handle (F) and remove the Cartridge Dome (J), unscrew the Locking Nut (K) and lift out the Cartridge (L).
3. Replace the Cartridge (L), replace the Locking Nut (K), replace the Cartridge Dome (J) and replace the Handle (F).
4. Tighten Grub Screw (I) and push in Decorative Cover (H).

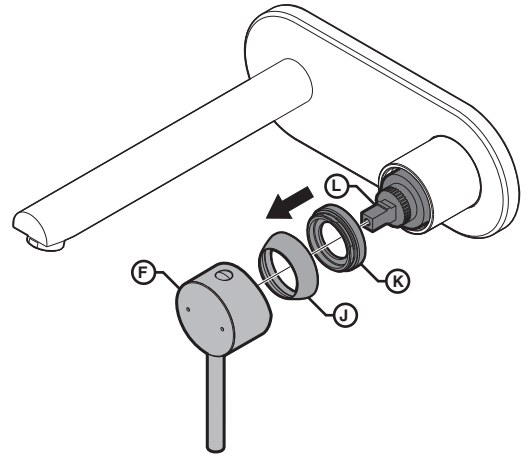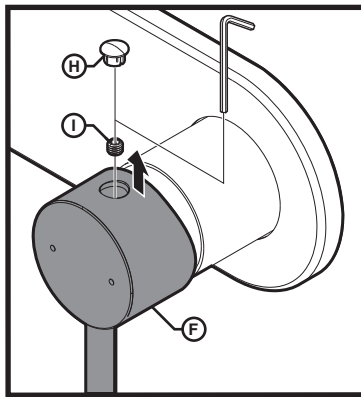

Note: Basin Outlet is pre-fitted with a (4) Star rated WELS Aerator. For Bath applications, Outlet Aerator must be changed to the supplied Bath Aerator packaged in the box.

- Aerator can be unscrewed using wrench.

Care Details

We recommend the use of soapy water or approved cleaners. This product should not be cleaned with abrasive materials. Damage caused by any improper treatment is not covered by the product warranty - refer to Warranty Conditions.

Plumbers, please ensure a copy of the installation instruction is left with the end user for future reference.