

## Kado Era Bath and Shower

### GENERAL INFORMATION:

Maximum operating pressure: 500 Kpa. A pressure reducing device is required if water pressure exceeds 500 kPa.  
Minimum operating pressure: 150 kPa. Maximum water temperature: 80°C.

This temperature rating is for the tapware product. For safety and to avoid risk of scalding, please refer to your water heater instruction manual.


### FOR THE PLUMBER:

1. All work should be carried out by a licensed plumber. Responsibility will not be accepted for incorrect installation of this tapware, or any tapware not installed by a registered Plumber.
2. The water supply lines need to be 'flushed out' prior to installation. This will avoid any foreign materials blocking the flow regulator, damaging the cartridge/valve and reducing the flow of water.
3. Connect the spout assembly or shower head into the wall outlet.
4. Install the stuffing box assembly to the wall connection. Ensure it is connected to the correct water supply.
5. Ensure all connections are tight.
6. Turn on the main water supply and check for leaks.


### CLEANING AND MAINTENANCE:

Do not use abrasive cleaners or any scouring cloth/pad to clean the product as it will scratch the surface. The surface should be cleaned only with warm water and mild detergent.

Due to large amounts of impurities in the water, regular cleaning or replacement of approved shower head and bath aerator is recommended.

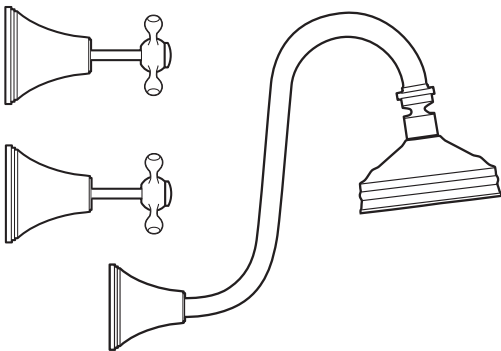

GOOSENECK SHOWER SET

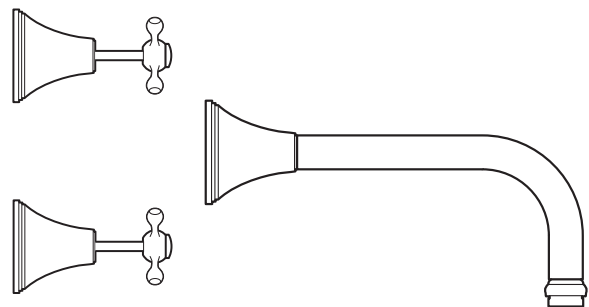

BATH SET