


# TOMSON THERMOSTATIC MIXING VALVES

## SPECIFICATIONS

<b>Recommended use</b>	The thermostatic mixing valves are a safe and reliable way to control water temperature
<b>Reece Product Code and Description</b>	2570004 - TOMSON LF TMV 15MM 2570005 - TOMSON LF TMV 20MM 109297 - TOMSON TMV SERVICE KIT 109298 - TOMSON TMV WALL BRACKET 109299 - TOMSON TMV STAINLESS STEEL BOX
<b>Hot Temperature Supply Range:</b>	55°C - 90°C
<b>Cold Temperature Supply Range:</b>	5°C - 30°C
<b>Maximum Supply Pressure:</b>	1600kPa
<b>Pressure Loss Ratio:</b>	10:1 (max)
<b>Accuracy:</b>	+2°C
<b>Operating Temperature Range:</b>	35°C - 50°C
<b>Factory Set Temperature Range:</b>	43°C ±2°C
<b>Minimum Temperature Differential (hot supply and outlet temp):</b>	10°C
<b>Minimum Flow Rate:</b>	4L / min
<b>Warranty:</b>	2 Years
<b>Installation</b>	Must be fitted and installed in accordance with AS/NZS 3500.1. <b>Must be installed by a licensed plumber.</b>
<b>Materials</b>	Nickel plated body and fittings. Chrome plated ½" nuts



THERMOSTATIC MIXING VALVE		
	15MM	20MM
<b>A</b>	124mm	124mm
<b>B</b>	52mm	52mm
<b>C</b>	121mm	121mm

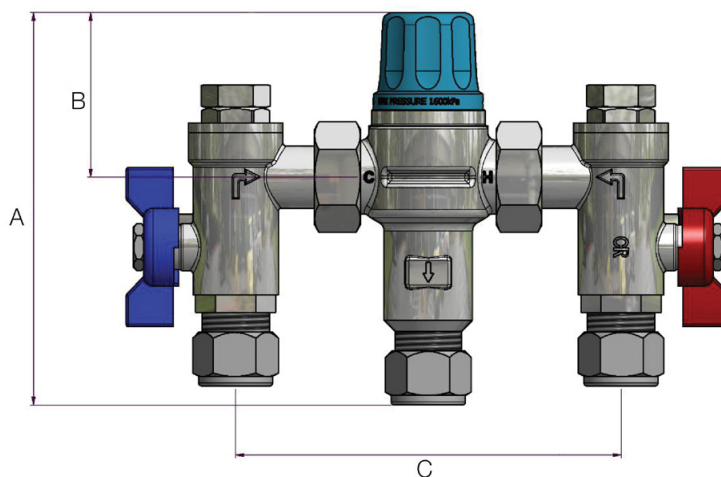

AS 4032.1-2005  
WMKA1593

Disclaimer: Products in this specification manual must by regulation be installed by licensed and register trade people. The Manufacturer/distributor reserves the right to vary specifications or delete models from their range without prior notification. Dimensions and set-outs listed are correct at time of publication however the manufacturer/distributor takes no responsibility for printing errors.  
AU-TOM-SS25007\_2024-v2

**TOMSON™** **reece™**

# TOMSON

# THERMOSTATIC MIXING VALVES

## REECE PRODUCT QUALITY GUARANTEE

You have purchased a quality product from Reece Pty Ltd ABN 84 004 097 090 ("Reece"). This product is covered by a 2 year product warranty.

## 2 YEAR WARRANTY

This warranty covers faults in the product construction, material and assembly. Product which are within 2 years from the date of purchase, found upon inspection by an authorised Reece representative, to be defective in construction, material or assembly, will be repaired or exchanged with an equivalent product free of charge. Replaced items become Reece's property.

All replacement products will be available for collection without charge to the customer at the nearest Reece branch to the customer's location, or elsewhere as agreed between the customer and Reece.

## Warranty Conditions

This warranty will apply only under all of the following conditions:

- The item has been installed by a licensed plumber
- Failure is due to a fault in the manufacture of the product
- Proof of purchase (including the date of purchase) is provided
- The installation of the product is in accordance with the instructions provided.

This warranty does not cover products purchased as an ex-display without being fully checked and tested for sale by the manufacturer.

## This warranty does not include faults caused by:

- Unsuitable or improper use
- Incorrect installation or installation not in accordance with the instructions provided
- Installation or part installation by the purchaser or any person other than a LICENSED PLUMBER or tradesperson licensed to install this product.
- Normal wear and tear
- Inadequate or complete lack of maintenance
- Chemical, electrochemical or electrical influence
- Harsh detergents or abrasive cleaners used on product finishes

## EXCLUSIONS

To the fullest extent permitted by law. Reece excludes all liability for damage or injury to any person, damage to any property, and any indirect consequential or other loss or damage.

## CLAIM PROCEDURE

For all warranty queries customers are to contact the branch where the product was purchased. These details can be found on your purchase invoice.

Our goods come with guarantees that cannot be excluded under the Australian Consumer Law. You are entitled to a replacement or refund for a major failure and for compensation for any other reasonably foreseeable loss or damage. You are also entitled to have the goods repaired or replaced if the goods fail to be of acceptable quality and the failure does not amount to a major failure.