




Mizu Drift Overhead Shower 300mm (3*)

SPECIFICATIONS		
Recommended Use	Domestic, hotel and commercial	
Colour	Chrome, Matte Black, Brushed Nickel, Brushed Gold	
Material	Brass	
Recommended Pressure Range	150 - 500 kPa	
Max Continuous Working Pressure	500 kPa	
Max Continuous Working Temperature	60 deg C	
Suitable for Storage Tank Hot Water	Yes	
Suitable for Continuous Flow Hot Water	Yes	
Suitable for Gravity Feed Hot Water	No	
WARRANTY		
Warranty - Domestic Use	10 Years	
Spare Parts & Labour	12 Months	
Please refer to Warranty Page for full Terms and Conditions		









CLEANING RECOMMENDATIONS:

We recommend the use of soapy water or approved cleaners. This product should not be cleaned with abrasive materials. Damage caused by any improper treatment is not covered by the product warranty. Refer to Warranty Conditions

Disclaimer: Products in this specification manual must by regulation be installed by licensed and registered trade people. The manufacturer/distributor reserves the right to vary specifications or delete models from their range without prior notification. Dimensions are nominal measurements only. Dimensions and set-outs listed are correct at time of publication however the manufacturer/distributor takes no responsibility for printing errors.





WATER RATING


In accordance with AS/NZS 6400
Licence No. 0025



Mizu Drift Gooseneck Shower Arm Only

SPECIFICATIONS	
Recommended Use	Domestic, Hotel & Commercial
Colour	Chrome
Colour Availability	Chrome, Matte Black, Brushed Nickel, Brushed Gold
Recommended Pressure Range	150 - 500kPa
Max Continuous Working Pressure	1000kPa
Max Continuous Working Temperature	60°C
Suitable for Storage Tank Hot Water	Yes
Suitable for Continuous Flow Hot Water	Yes
Suitable for Gravity Feed Hot Water	No
Hot and Cold water inlet pressure should be equal	
WARRANTY	
Warranty - Domestic Use	10 Years
Spare Parts & Labour	12 Months
Please refer to Warranty Page for full Terms and Conditions	



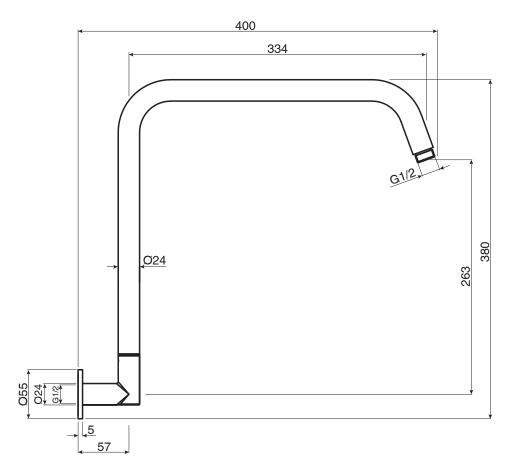

Dimensions are nominal measurements only.

Disclaimer: Products in this specification manual must by regulation be installed by licensed and registered trade people. The manufacturer/distributor reserves the right to vary specifications or delete models from their range without prior notification. Dimensions are nominal measurements only. Dimensions and set-outs listed are correct at time of publication however the manufacturer/distributor takes no responsibility for printing errors.






Mizu Drift Wall Top Assemblies

SPECIFICATIONS		
Recommended Use	Domestic, Hotel & Commercial	
Colour	Chrome	
Colour Availability	Chrome, Matte Black, Brushed Nickel, Brushed Gold	
Recommended Pressure Range	150 - 500kPa	
Max Continuous Working Pressure	1000kPa	
Max Continuous Working Temperature	65°C	
Suitable for Storage Tank Hot Water	Yes	
Suitable for Continuous Flow Hot Water	Yes	
Suitable for Gravity Feed Hot Water	No	
Hot and Cold water inlet pressure should be equal		
WARRANTY		
Warranty - Domestic Use	10 Years	
Spare Parts & Labour	12 Months	
Please refer to Warranty Page for full Terms and Conditions		





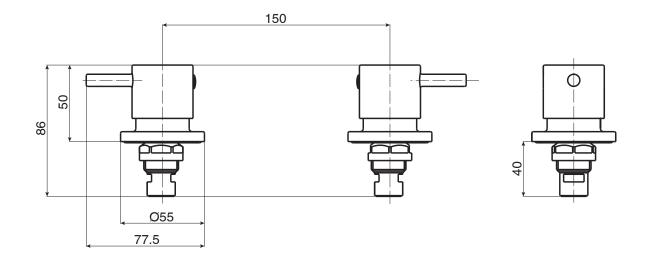





Disclaimer: Products in this specification manual must by regulation be installed by licensed and registered trade people. The manufacturer/distributor reserves the right to vary specifications or delete models from their range without prior notification. Dimensions are nominal measurements only. Dimensions and set-outs listed are correct at time of publication however the manufacturer/distributor takes no responsibility for printing errors.

