


FINAL INSPECTED MOTORS MUST COMPLY WITH ELECTRIC MOTOR VIBRATION SPECIFICATION (ES049)

THIRD ANGLE PROJECTION.

Q.R. No.		Y002808		CUSTOMER NO.		6051685S		
CUSTOMER		CLIMATE TECHNOLOGIES						
MOTOR RATING	VOLTS	240	Hz	50	Ph	1	Duty	AOM
	RPM.	1295			6.8			AMPS
	NOM. OUTPUT	950 WATTS						
ROTATION		CLOCKWISE DRIVE END						
CAPACITOR	START	-----		µF/V	RUN	25/400		µF/V
ENCLOSURE		VENTED						
MOTOR TYPE		CSR			INSULATION CLASS		B 130	
THERMAL PROTECTION		AUTO RESET OVERLOAD						
APPLICATION		FAN-EVAPORATIVE COOLER						
BEARING D.E.		6203 ZZ C3			LUBRICATION		LONG LIFE, WIDE RANGE	
BEARING N.D.E.		6202 ZZ C3						
SUPPLY LEAD		FLEX 850 ± 30 GREY						
EARTH PROVISION		VIA SUPPLIED LEAD						
BASIC BUILD SPECIFICATION		305-722-03			PAINT/ COLOUR		PC GREY CASE PLAIN E/SHIELD	
PERFORMANCE SPECIFICATION		SP85377-01						
CONNECTION DIAGRAM		393-402-06			RATING LABEL		SSTDAUTO.FMT	

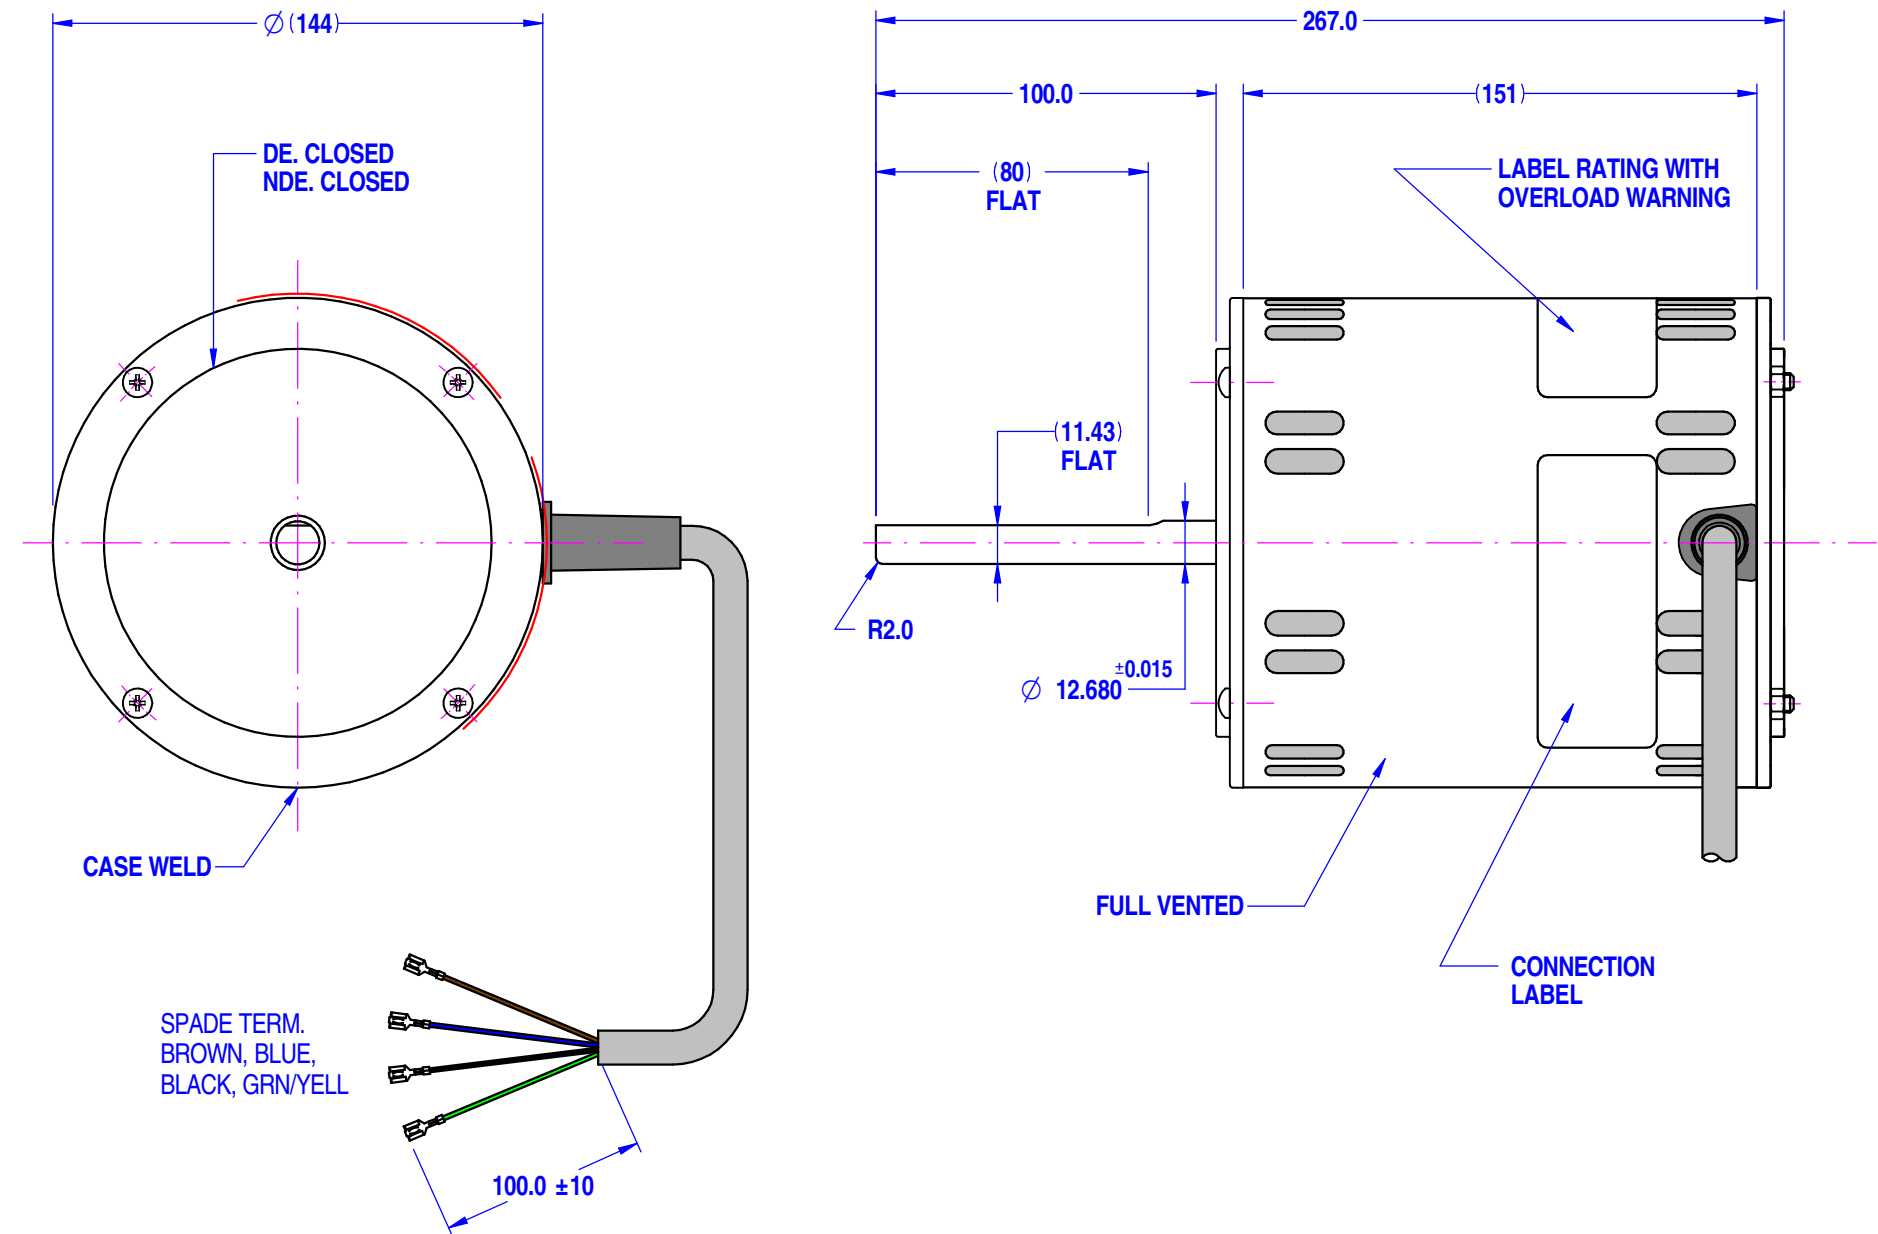

WARNING

— 87.0

1)_CAPACITOR SUPPLIED BY CUSTOMER
2)_MOTOR TO BE PACKED IN SINGLE CARTON
3)_ STAMP CUSTOMER NO.6051685US ON THE CAPCOVER ALL SIDE.

REVISION