


THIRD ANGLE PROJECTION.


## **MOTOR SPECIFICATION**


## 80855BPVA-A11S

Q.R. No.		Y000984			CUSTOMER NO.		NO.	6051655S			
	CUSTOMER	VARIOUS									
	VOLTS	24	40	Hz	50	Ph	1	Dι	ıty	S1 AOM	
MOTOR RATING	MAX. INPUT	1270				<b>4.2</b> AMPS			AMPS		
HATING	NOM. OUTPUT	600 WAT				ATT	S				
	ROTATION	CLOCKWISE AT DRIVE END									
CAPACITOR		START		μF/ \	V RUN 2		20	0/40	<b>)0</b> μF/ V		
ENCLOSURE		VENTED									
MOTOR TYPE		<b>CSR</b> INS			ISULA	ULATION CLASS B130			B130		
THERMA	L PROTECTION	AUTO RESET OVERLOAD									
	APPLICATION	FAN - SHAFT HORIZONTAL									
BEARING D.E.		6202 DDU			LUBRICATION			LONG LIFE,			
В	BEARING N.D.E.		6202 DDU				LUBRICATION		'   '	WIDE RANGE	
	SUPPLY LEAD FLEX 850 ± 30 GREY										
EAR	TH PROVISION	VIA SUPPLIED LEAD									
SP	BASIC BUILD ECIFICATION	3	05-570	)-21		łi_		Р	PC GREY CASE PLAIN E/SHIELDS		
	RFORMANCE PECIFICATION	S	P8519	0-01				PL			
CONNECTION DIAGRAM		3	393-402-06			RATING LABEL SS		STE	DAUTO.FMT		

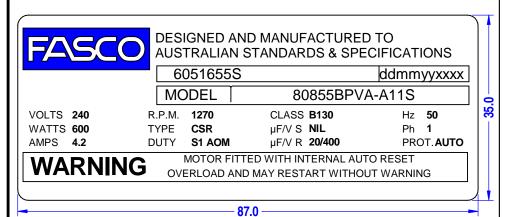

## FINAL INSPECTED MOTORS MUST COMPLY WITH ELECTRIC MOTOR VIBRATION SPECIFICATION (ES049)

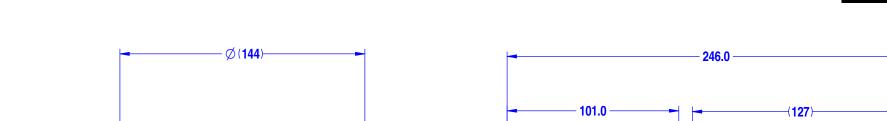

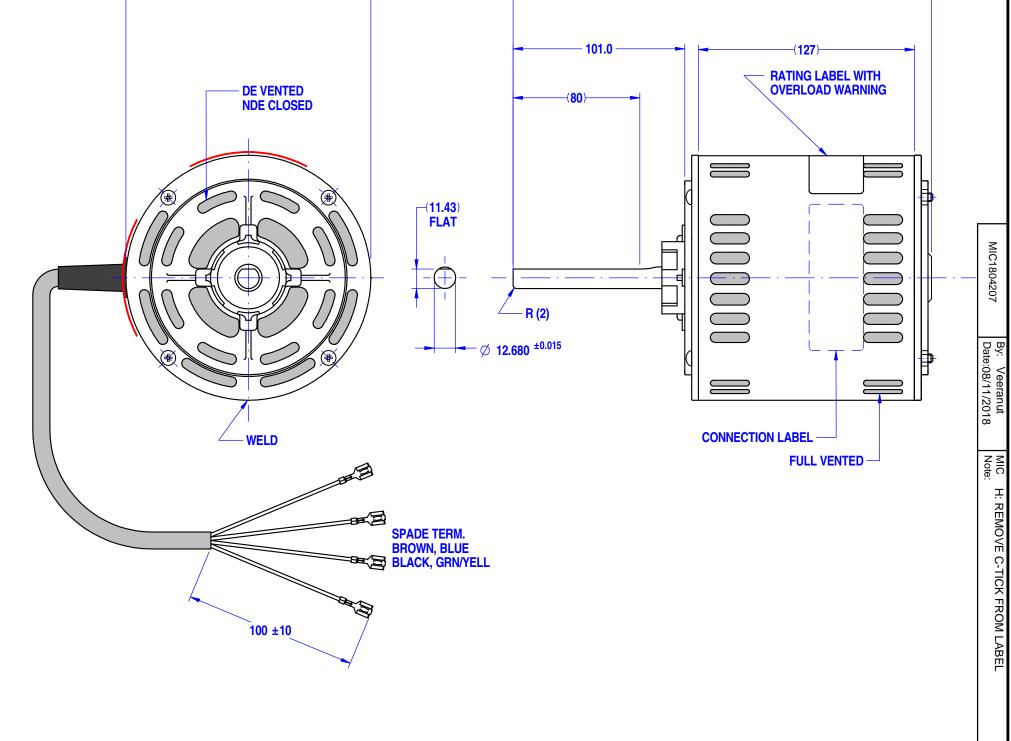

## **SPECIAL REQUIREMENTS:**

- 1) CAPACITOR SUPPLIED BY CUSTOMER.
- 2) MOTOR MUST BE LOAD TESTED.
- 3)\_MOTOR TO BE PACKED IN SINGLE CARTON.

UNLESS OTHER	WISE SPECIFIED :
DIMENSIONS	ARE IN MM.
TOLER	RANCES
DECIMALS	ANGULAR
.X ± 1.0	+ 30'

MOTORS AND MAY NOT BE USED, COPIED OR ISSUED WITHOUT WRITTEN PERMISSION FROM FASCO MOTORS

	TOLER	ANCES		
DECIMALS		ANGULAR		
.X	± 1.0	± 30'		
.XX	± 0.1			
THIS DR	AWING REMAINS TH	IE PROPERTY OF FASCO		

MOTOR WEIG	8.3	
		kg.
DRAWN	Nutapong	15/02/2001
CHECKED	Pipat	09/11/2018
RELEASED	Suksakorn	09/11/2018
SCALE	N.T	ī.S.

MOTOR WEIGHT



29/7-8 MOO 3, BANGKRUAY - SAINOI Rd., BANGKRANG, MUANG NONTHABURI DISTRICT. **NONTHABURI 11000 THAILAND** 

FRAME	MOTOR
STATUS R	B190:855BV-60
SHEET	DWG NO

355BV-600-XAD REVISION

Н

80855BPVA-A11S