


NOBILI

ACQUARIO SHOWER/BATH MIXER DIVERTER

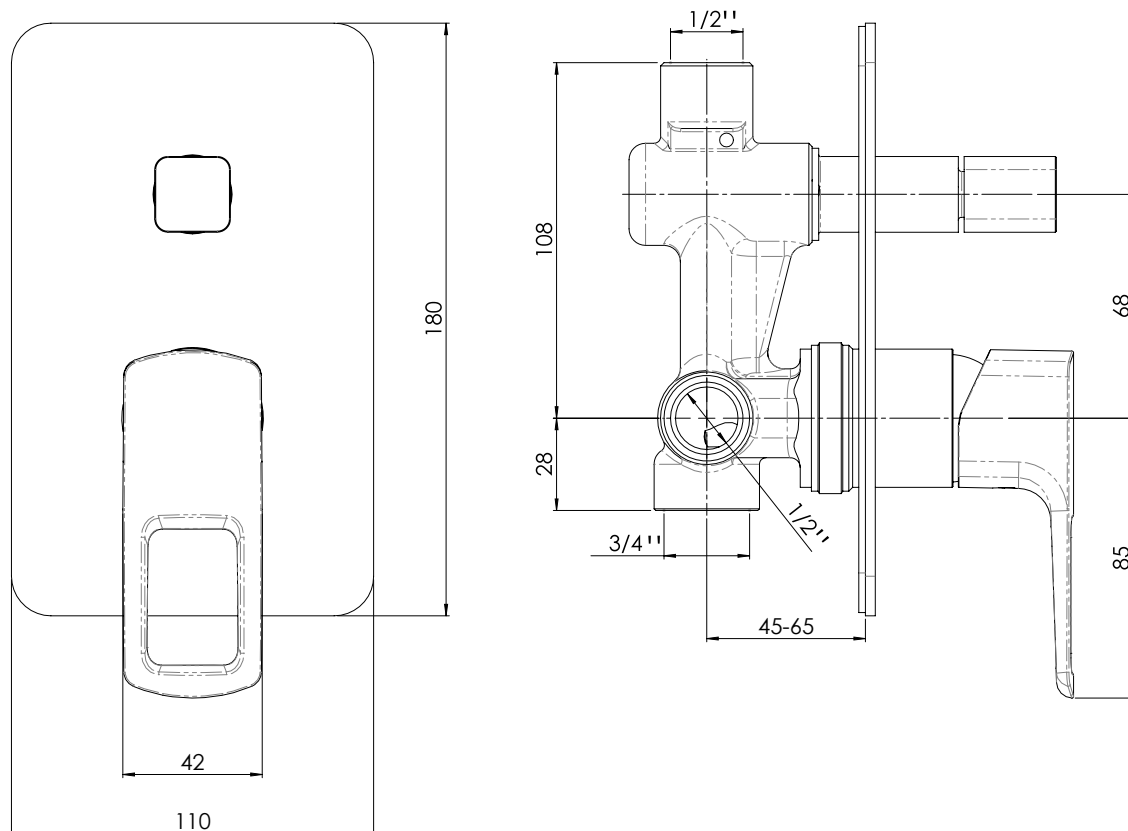

Dimensions are nominal measurements only.

SPECIFICATIONS

Recommended use	Domestic, hotel and commercial
Colour	Chrome
Pressure rating	Minimum continuous working pressure 50 kPa Maximum continuous working pressure 1000 kPa For best performance and longer life we recommend 150-500kPa
Temperature rating	Maximum recommended working temperature 65°
Suitable Hot Water Units	Storage tank: Yes Continuous Flow: Yes Gravity Feed: Not recommended



To see the complete NOBILI range go to
www.reece.com.au/bathrooms

CLEANING RECOMMENDATIONS





We recommend the use of soapy water or approved cleaners.

This product should not be cleaned with abrasive materials.

Damage caused by any improper treatment is not covered by the product warranty. Refer to Warranty Conditions.

NOBILI






ACQUARIO SHOWER/BATH MIXER DIVERTER

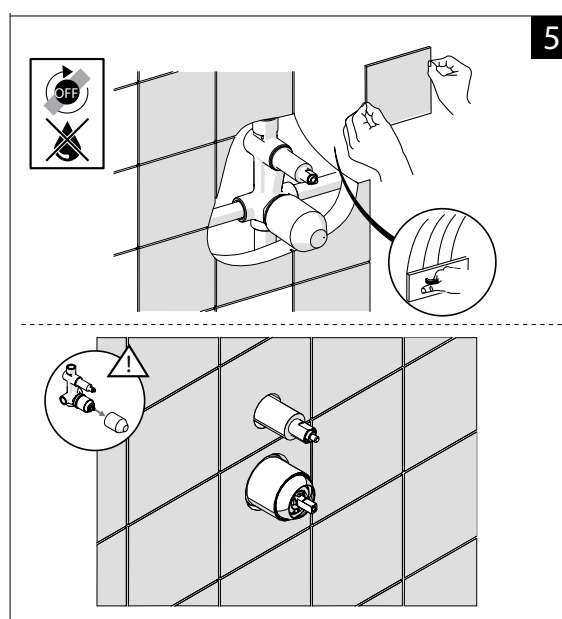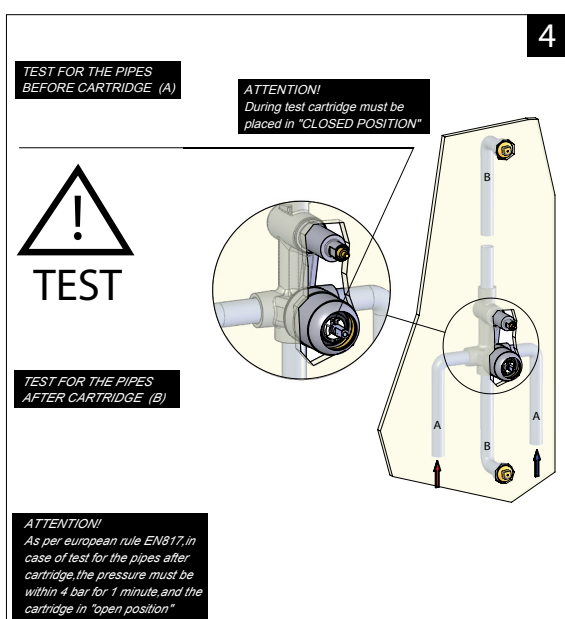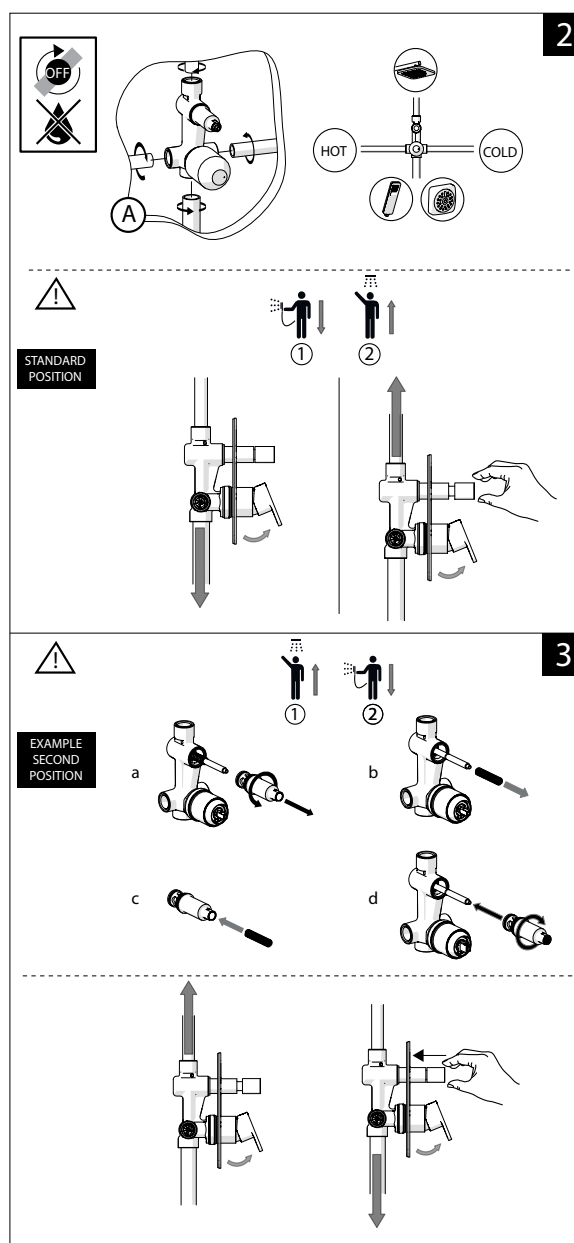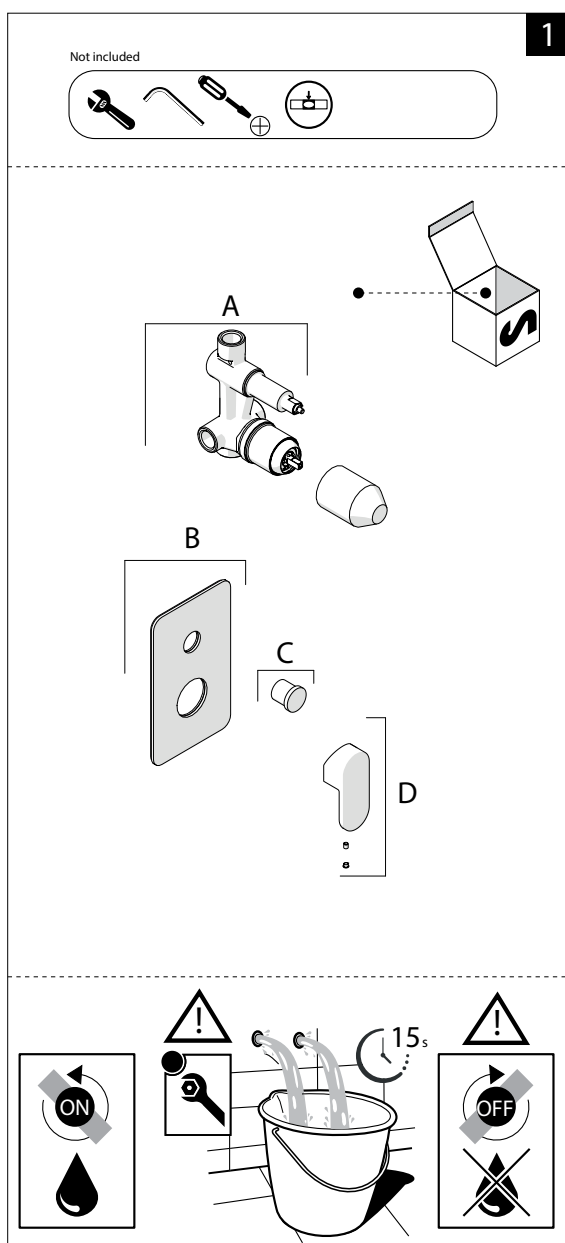

Plumbers, please ensure a copy of the installation instructions is left with the end user for future reference

NOBILI


ACQUARIO SHOWER/BATH MIXER DIVERTER

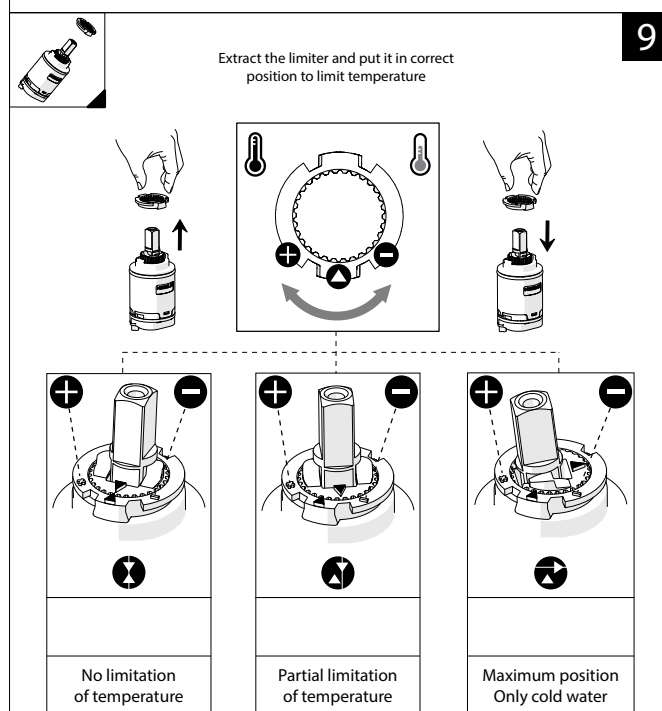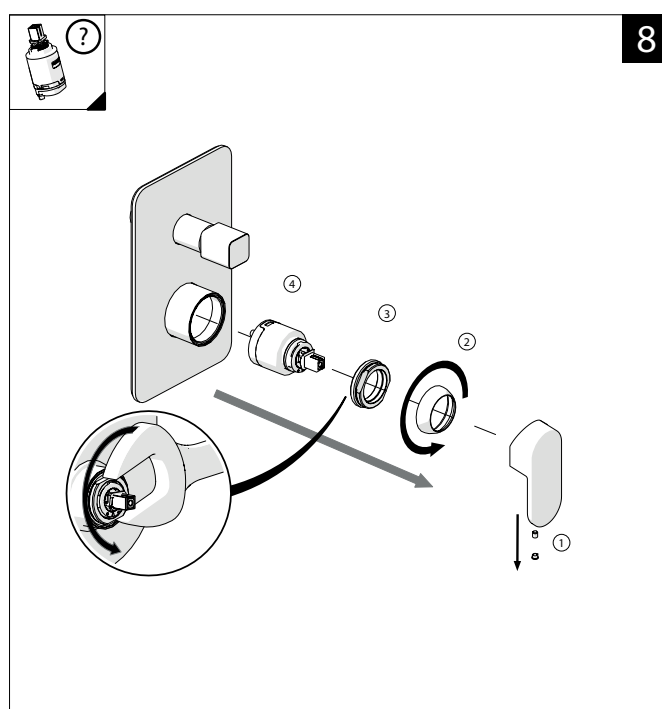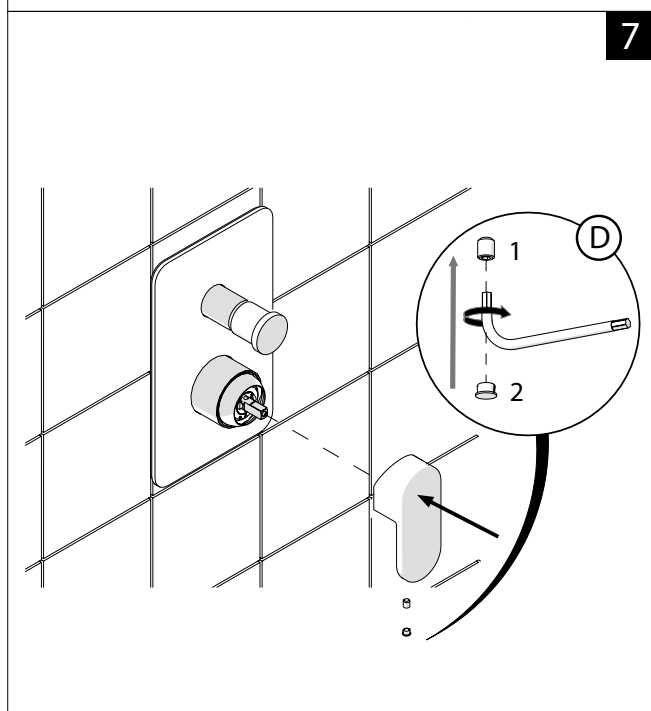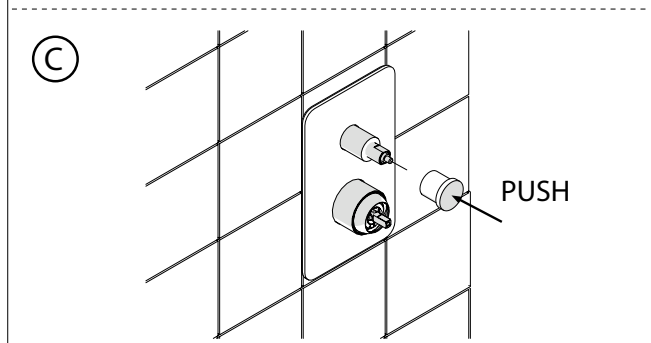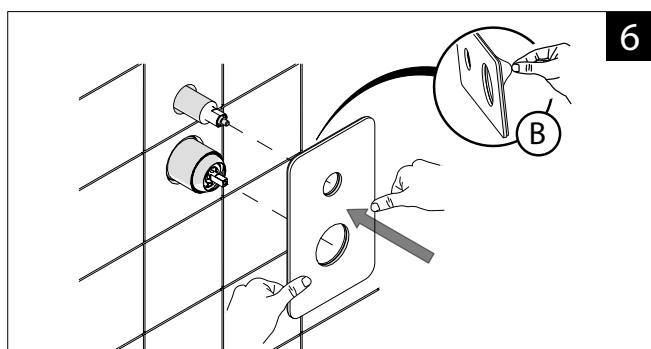

BEFORE STARTING



CLEANING

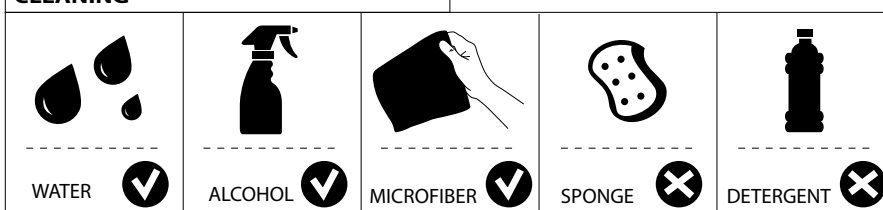

Plumbers, please ensure a copy of the installation instructions is left with the end user for future reference