

Food Service Pre-Rinse Wall Riser with Single Control and Spring Return

FWS011


A heavy-duty wall mounted pre-rinse spray assembly to meet most commercial and institutional kitchen requirements. Ultra-Rinse pre-rinse trigger spray cleans more efficiently, requiring less water per minute.

FEATURES

- WELS 6 Star (4 lpm) water efficiency rating
- Singe control tap for single temperature, cold or pre-mixed water
- Dual check valves for backflow protection
- Spring return allows the spray and hose to be pulled into the spraying position and to retract back from the washing area when released

OPTIONS

Pot filler for efficiency and maximising workspace has WELS 3 Star (8 lpm) supplied as standard also available in WELS 5 Star (6lpm) rating

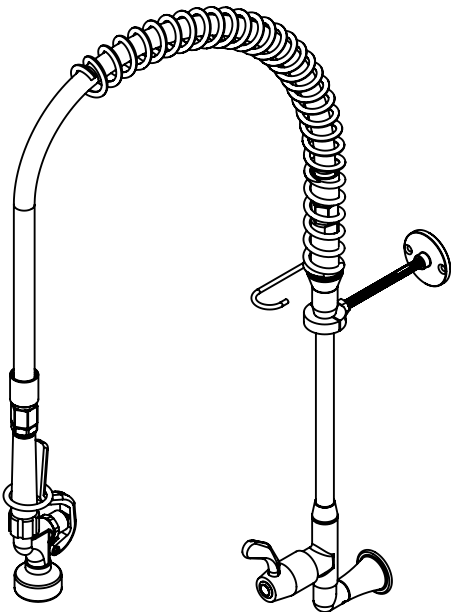

Product Code

FWS011 Food Service Pre-Rinse Wall Riser with Single Control and Spring Return




Technical Information

Inlet Connection	15mm ½" BSP
Flow Rate - Gun	4 l/minute
Flow Rate - Pot Filler*	8 l/minute
Recommended Working Pressure	500 kPa
Maximum Operating Temperature	85 °C

*Supplied standard - also available in 5 Star 6lpm
Note: Must be installed with accessible isolation valve

Enware tapware must be installed in accordance with the provisions of AS/NZS3500 and any relevant local regulations. Installations not complying with AS/NZS3500 may void the product and performance warranty provisions. The performance of Enware AS/NZS 3718 tapware, in many cases, exceeds the plumbing system design requirements of the Plumbing Code of Australia and AS/NZS 3500.

For optimum performance it is recommended that the control valves or taps be turned off when not in use overnight or for long periods. Complete pre-rinse assemblies incorporate a dual check valve for backflow prevention. Lever tapware control incorporate quarter turn non-rising jumper valves.

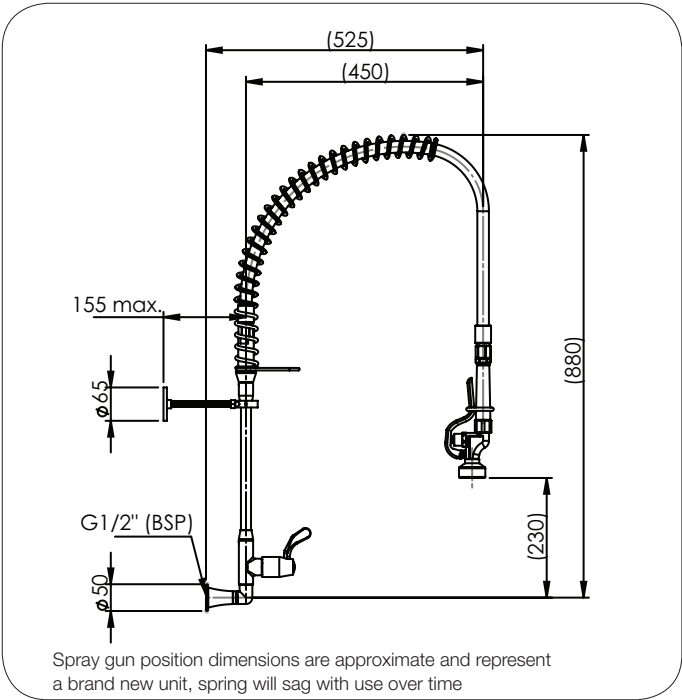

Version: Jul18

Call 1300 369 273
www.enware.com.au

Enware Australia Pty Limited
9 Endeavour Rd Caringbah NSW 2229 Australia
Ph: 02 8536 4000 info@enware.com.au

