


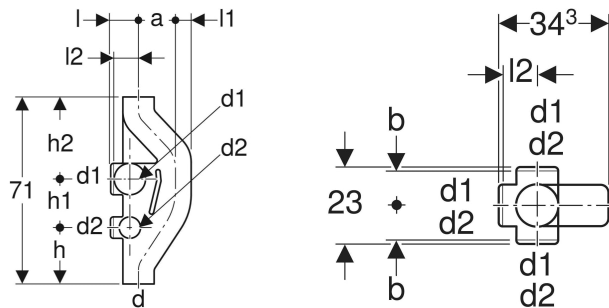

CHARACTERISTICS

- Six connection options, closed
- UV-resistant

TECHNICAL DATA

Product material

PE-HD

INFO

- Sovent fittings are installed as a system. Refer Sovent Installation Guide.

Art. no.	Reece no.	DN	d, ø mm	Discharge rate l/s	d1, ø mm	d2, ø mm	a cm	l cm	l1 cm	l2 cm	b cm	h cm	h1 cm	h2 cm
369.001.16.1	1433739	150, 100, 70	160	≤ 17	110	75	13.3	13	8	11	9.5	19	17	35