


ZH-6152XL

HYDRAULICALLY ACTIVATED PAN FLUSH VALVE

Dimensional Data (mm) are Subject to Manufacturing Tolerances and Change Without Notice



ENGINEERING SPECIFICATION

- AquaVantage Concealed Flush Valve with Hydraulic Actuator for Water Closets.
- Zurn's AquaVantage TPE, chloramine resistant, dual seal diaphragm
- Non-hold-open type hydraulic push-button actuator that may be located up to 900mm from the valve
- One-piece hex coupling nut and adjustable tailpiece
- Min water supply pressure - 175kPa
- Max water supply pressure - 500kPa
- Flush volume - 6L
- Flow rate required - 1.5L per sec
- Inlet connection - 25mm BSP

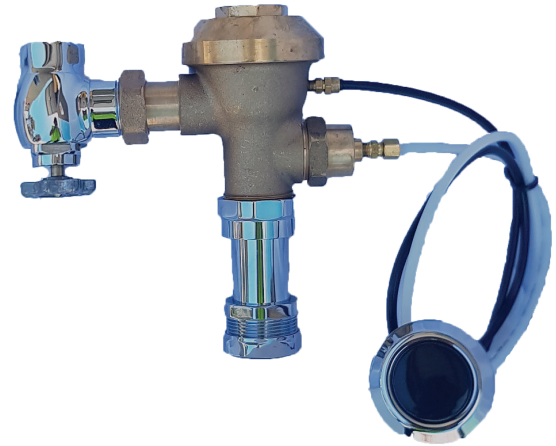

STANDARDS COMPLIANCE

- Watermarked Approved - WM-000307
- WELS Registration No. L07526
- WELS Rating - 2 Star - 4.5L

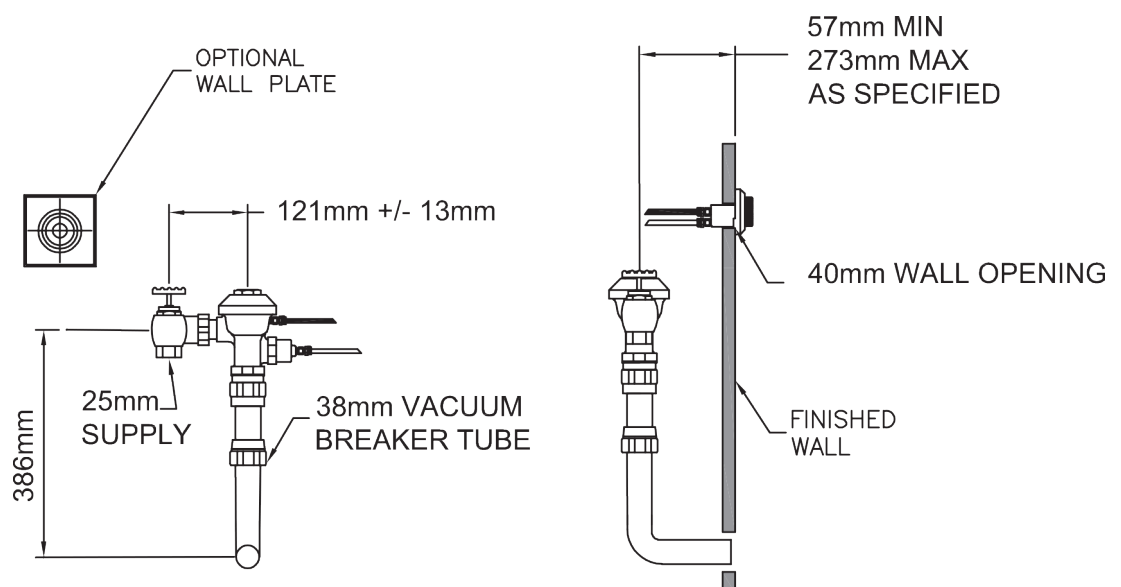

OPTIONS

CODE	DESCRIPTION
ZH-6152BX12	300x300mm stainless steel panel and frame
SS-300H18	300x300mm stainless steel panel w/ 18mm centre hole
SSP-300	300x300mm stainless steel panel and frame w/ concealed fixings