


# MILLI AXON

## FLOOR MOUNTED BATH MIXER

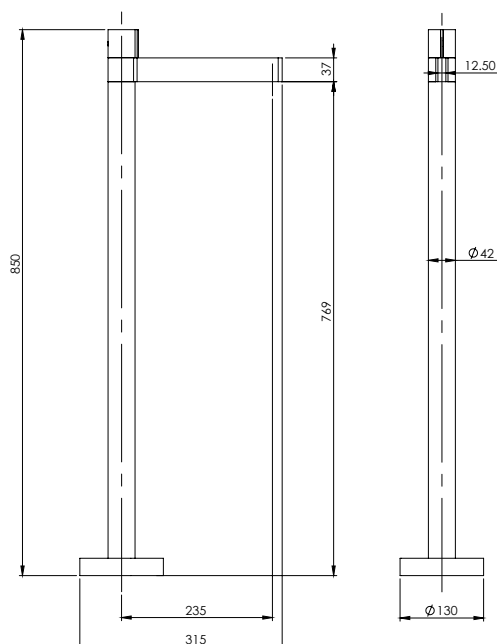

### SPECIFICATIONS

<b>Recommended Use</b>	Domestic, hotel and commercial
<b>Finish Available</b>	Chrome Handle with Chrome Outlet Chrome/Black Handle with Black Outlet
<b>Pressure Rating</b>	Maximum continuous operating pressure 500 kPa. Note: For best performance and longer life we recommend 150-500 kPa.
<b>Temperature Rating</b>	Maximum continuous working temperature 75°
<b>Suitable Hot Water</b>	Storage Tank: No Continuous Flow: Refer to manufacturer of continuous hot water systems Gravity Feed: No
<b>Standards</b>	AS/NZS 3718



To see the complete Milli range go to [www.reece.com.au/bathrooms](http://www.reece.com.au/bathrooms)

### CLEANING RECOMMENDATIONS

This product should not be cleaned with abrasive materials eg. steel wool/scourers. Damage caused by any improper treatment is not covered by the product warranty - refer to Warranty Conditions.



**Disclaimer:** Products in this specification manual must by regulation be installed by licensed and registered trade people. The manufacturer/distributor reserves the right to vary specifications or delete models from their range without prior notification. Dimensions are nominal measurements only. Dimensions and set-outs listed are correct at time of publication however the manufacturer/distributor takes no responsibility for printing errors.

Tech Page Version 1

Milli

reece

# MILLI AXON FLOOR MOUNTED BATH MIXER

## INSTALLATION INSTRUCTIONS

MILLI AXON FLOOR MOUNTED BATH MIXER Installation Instructions			
<p><b>1 Option A</b> Recommended pit to be cast in concrete.</p> <p>Copper or flexible hose with G 1/2" Female connectors.</p> <p>PVC Tube</p> <p>100mm deep</p> <p>135 SQUARE (APPROX.)</p>	<p><b>3</b> Connect hot and cold hoses to the Inlet Body G 1/2" inlet connectors. Tighten firmly.</p> <p>TEST AND CHECK FOR LEAKS</p>	<p><b>6</b> REMOVE PROTECTIVE COVER FROM TILED FLOOR.</p> <p>Gently slide Dress Cover up Mixer Body.</p> <p>Screw Mounting Flange into Mixer Body. Tighten firmly.</p> <p>Dress Cover</p> <p>Mounting Plate</p>	<p><b>9</b> For minor adjustment, rotate and adjust the Mixer Assembly to desired position. Fasten the Grub Screw to secure the Mixer Assembly. Push Down the Cover Plate over the Mount Plate gently.</p> <p>Grub Screw</p>
<p><b>Option B</b> Timber Floor Installation</p> <p>Copper or flexible hose with G 1/2" Female connectors.</p> <p>Floor board</p> <p>Floor joist</p> <p>19mm Particle board spacer</p>	<p><b>4</b> Fasten Inlet Body to Mount Plate with 4 x M8 countersunk screws. Tighten firmly.</p> <p>Use M15 Brass Plugs supplied for testing.</p> <p>M15 Brass Plugs x2</p>	<p><b>7</b></p> <p>M15 Connectors</p> <p>Use Special Spanner provided to tighten M15 connectors to Inlet Body</p> <p>Inlet Body</p>	<p><b>SAFETY WARNING</b> Do not use the spout to support yourself when entering or exiting the bath. Excessive force may cause the spout to break away from the body and is not covered by warranty</p> <p><b>MIXER OPERATION</b></p> <p>Hot Water Only</p> <p>Warm Water Temperature increase gradually</p> <p>180°</p> <p>95°</p> <p>Cold Water Only. Flow increase gradually</p> <p>OFF</p>
<p><b>2</b> Locate Mounting Plate over cast pit and secure with M10 Dynabolts provided. Tighten firmly. Ensure inlet hoses are fed through opening in the Mounting Plate.</p> <p>FEED HOSES THROUGH OPENING</p>	<p><b>5a</b> Place Protective Cover over Inlet Body and fasten with 4 x M8 screws provided.</p>	<p><b>8</b> Use M8 screws to secure Floor Mixer to Inlet Body. Tighten Firmly.</p>	<p><b>REMOVING THE AERATOR RETAINER</b> Remove the screw. Place your hand underneath the aerator retainer. Turn on water gradually until the aerator retainer washes out onto your hand.</p> <p>Aerator Retainer</p> <p>SCREW</p>
<p><b>Recommended Working Pressure</b> 150 KPa Min. 550 KPa Max.</p> <p><b>Maximum hot water temperature</b> 75°</p>	<p><b>Note:</b> - If the pressure exceeds or is likely to exceed 550kpa, an approved pressure limiting device must be installed. - Flush out all pipe work prior to installation. - If the water temperature exceeds 75°C, an approved tempering valve must be fitted. - Installation should comply with Australian standard AS3500.1 or relevant local authority requirements. <b>Failure to comply with the above may void all warranties.</b></p>	<p><b>Maintenance and Care</b> - Chrome plated surfaces should be cleaned with mild liquid detergent or soap and water. - <b>Do not</b> use cream cleaners or citrus based cleaning products, as they are abrasive. - Use of unsuitable cleaning agents may damage the surface. Any damage caused in this way will not be covered by warranty.</p>	

Plumbers, please ensure a copy of the installation instructions is left with the end user for future reference

