
Installation and Operating Instructions FRK601071E-Single Door Combi 6.5L, RM 2030048720 365 x 720 x 115 -101 **-** 365 - **-** − 696 720 536 50 0 - 347 -**Recommended Mounting** 80 Height off floor- 960 to 1070 mm **-** 254 **-**115



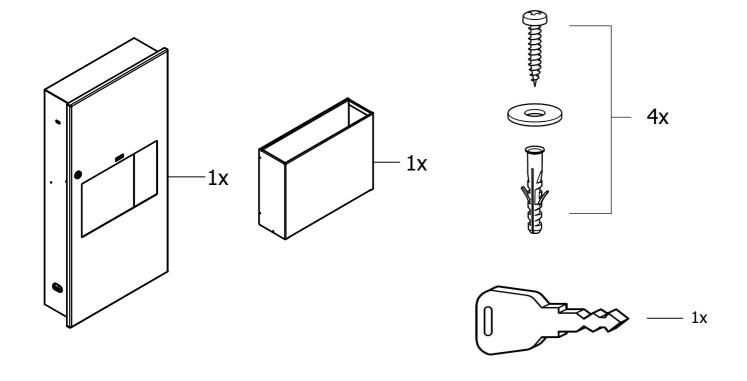

MATERIALS:

1. SS304 Grade Stainless steel; all the surfaces have satin-finish.

INSTALLATION GUIDELINES:

Wall Opening Dimensions:


Width-349mm Height-699mm Depth-103mm

- 1. Once the wall opening has been recessed, use the keys provided to open the door of the combination unit.
- 2. Remove the waste bin from the combination unit.
- 3. Place the combination Unit in to the recessed wall and mark the exact point and the mounting hole distance.
- 4. Drill mounting holes on the wall using the reference marked dots.
- 5. Fix the plastic dowel in to the hole and make sure they are flushed with the wall.
- 6. Now place the unit in to the wall and install the screws into the mounting holes.
- 7. After finishing if the unit is loose, make sure the screws are all the way in and the screw heads are the only visible parts.
- 8. Finally place the waste bin in to the combination unit and close the door.

REPLACEMENT PARTS:

1. Lock and key set- 2000103362

NOTE:

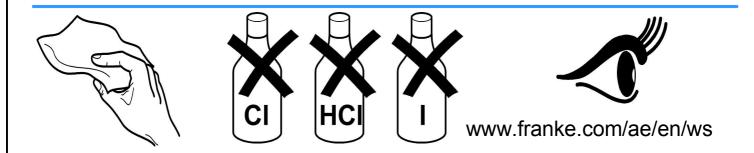

Franke L.L.C P.O. Box 14511 Ras Al Khaimah / United Arab Emirates t: +971 (0)7 2034 700

e: ws-info.ae@franke.com

