


Create a bathroom or kitchen anywhere.



Macerators and Lifting Stations

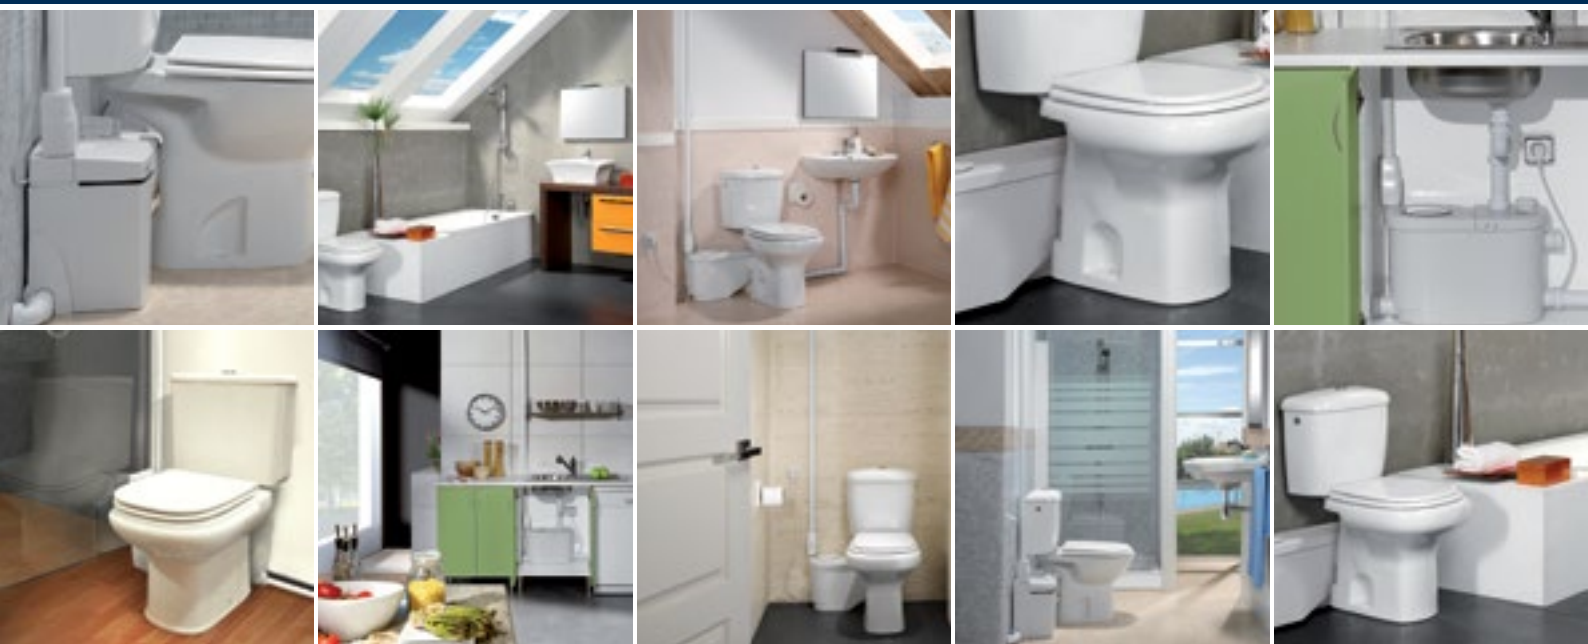

The Domestic Ciclon Range

Ciclon XS Macerator

This unit is ideal for converting any area into a basic bathroom with a toilet and one other additional bathroom fitting.



Ciclon Fit Macerator

Thanks to its reduced thickness this unit is designed for bathrooms with low compact toilet, basin, elevated shower, bath and bidet.



Ciclon L Macerator

This unit can transform any area into a complete bathroom with toilet, basin, elevated shower, bath and even a bidet.



Ciclon LS Lifting Station

Use this unit to create a laundry or kitchen area, with sinks, washing machine, dishwasher, elevated shower, basin and bidet.



NOTE: Adaptable up to five appliances, refer AS 3500.

Ciclon's three Macerators and the Lifting Station are designed with an exclusive cassette system. It houses all of the electrical and mechanical components, which allows for fast and easy maintenance without having to remove the toilet or the appliance.

The low noise level allows installation of the products into any part of your home, thanks to the quiet running performance of the Ciclon range.

The Ciclon XS, Ciclon L, Ciclon Fit and Ciclon LS range ensures you have the right product to create your bathroom or kitchen anywhere.



Examples of how flexible the Ciclon Macerators and Lifting Station can be in your home.



XS Macerator

The Ciclon XS sanitary macerator allows the installation of a bathroom in confined spaces or areas without existing drainage plumbing. Its modern design ensures a complementary fit to your toilet and basin.


- One toilet pan connector
- One 40mm side inlet to connect a basin, elevated shower or bidet
- Pumps up to 4m vertically or 42m maximum horizontally
- Motor 0.47 kW, 240 V/50Hz
- Dimensions: 482 x 278 x 227mm (width-height-depth)
- Outlet Size 25mm Pressure Pipe
- 64 dB noise level
- 2 year warranty
- Macerator requires 6 litre flush

*May not be suitable for commercial applications.






Specifications

Pumping height and distance

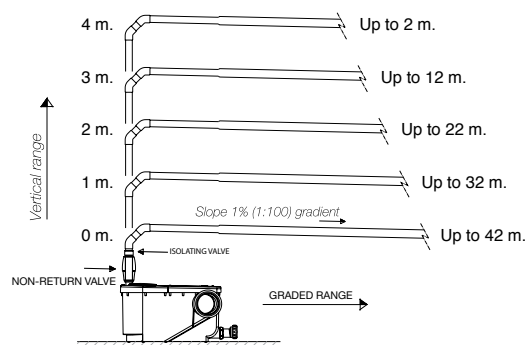

Macerator dimensions

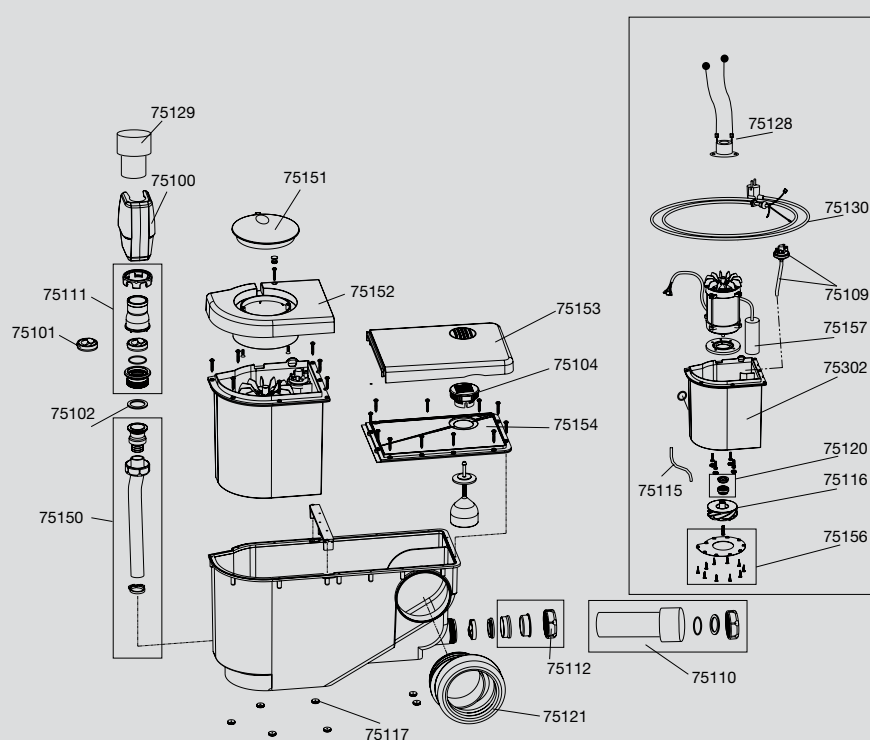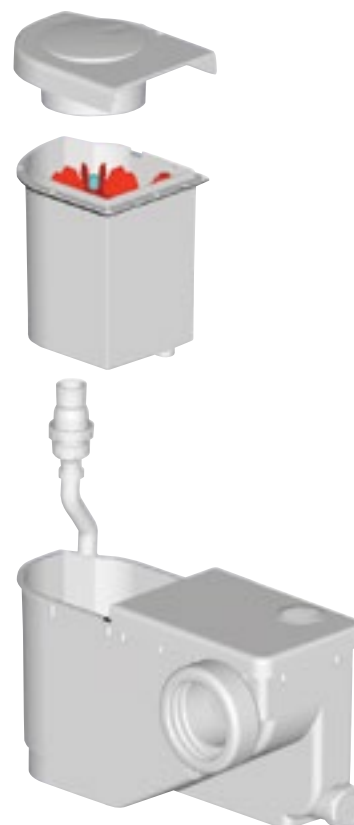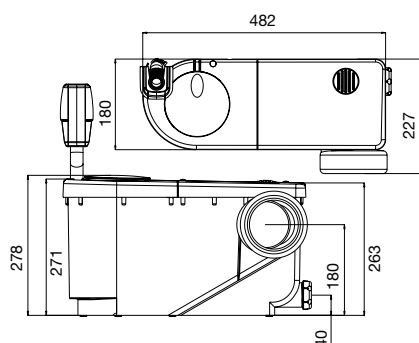

Components

75100	Check valve trimming cover
75101	Check valve
75102	Check valve flat joint
75104	Activated carbon cartridge
75109	Pressure switch with pipe
75110	Inlet adaptor
75111	Check valve set
75112	Side catch cap
75115	Pressure switch pipe
75116	Rotor
75117	Lower body limits set
75120	Ceramic catch
75121	Toilet sleeve
75128	Triac Kit
75129	Outlet adaptor
75130	Cable with plug
75150	Impulse pipe
75151	Upper Trimming Cover
75152	Cassette layer
75153	Body trimming cover
75154	Body watertight set
75156	Outer blade set
75157	Condenser
75302	Cassette set

L Macerator

The Ciclon L sanitary macerator allows the installation of a complete bathroom in confined spaces or areas without existing drainage plumbing. Its modern design ensures a complementary fit to your toilet and two sanitary appliances. Its attractive design fits perfectly with the other bathroom equipment.


- One toilet pan connector
- Two 40mm side inlets to connect a basin, elevated shower/bath or bidet
- Pumps up to 6m vertically or 62m maximum horizontally
- Motor 0.55 kW, 240 V/50Hz
- Dimensions: 530 x 300 x 239mm (width-height-depth)
- 72 dB noise level
- 2 year warranty
- Outlet Size 25mm Pressure Pipe
- Macerator requires 6 litre flush

*May not be suitable for commercial applications.





Specifications

Pumping height and distance

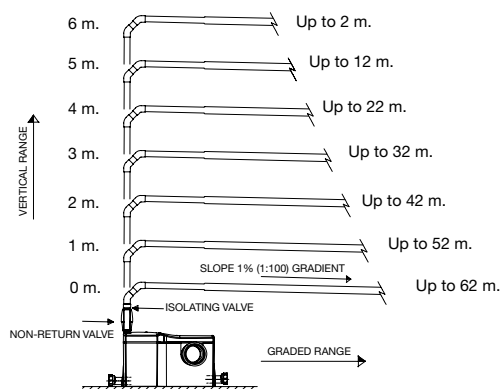


Macerator dimensions

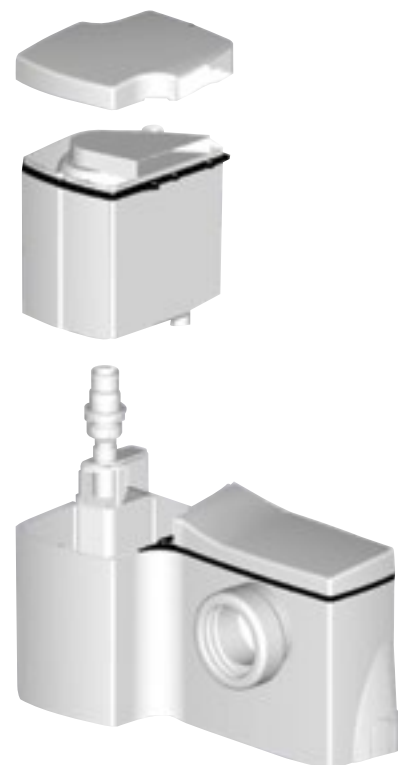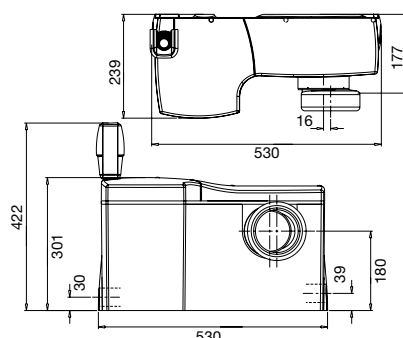

Components

75002	Cassette set
75100	Check valve trimming cover
75101	Check valve
75102	Check valve flat joint
75103	Screw cover
75104	Activated carbon cartridge
75106	Left cover side cap
75107	Right cover side cap
75108	Condenser
75110	Inlet adaptor
75111	Check valve set
75112	Side catch cap
75113	Motor ventilation dome
75114	Body watertight layer with joint
75115	Pressure switch pipe
75116	Rotor
75117	Lower body limits set
75118	Cassette upper layer
75119	Body upper layer
75120	Ceramic catch
75121	Toilet sleeve
75123	Cassette watertight joint
75124	Pressure switch with pipe
75128	Triac Kit
75129	Outlet adaptor
75130	Cable with plug
75156	Outer blade set

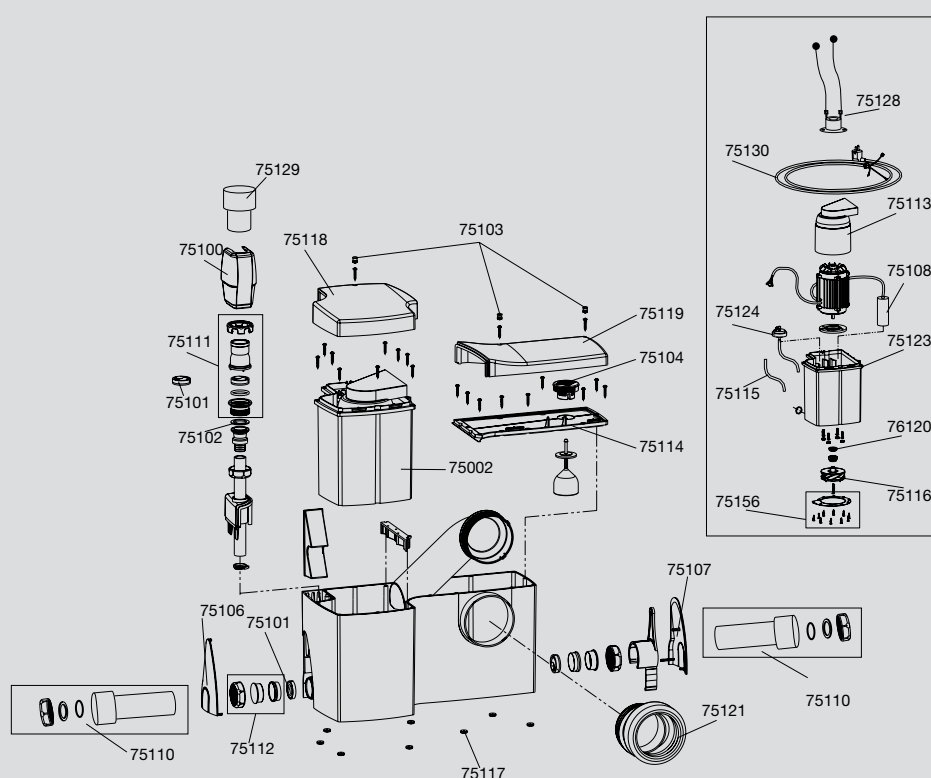

Fit Macerator

The Ciclon Fit sanitary macerator allows for installation with low compact toilets. Like the Ciclon L model, it works with confined areas to install a complete bathroom without existing drainage plumbing. Its modern design ensures it can be fitted around any lowered cistern toilets along with 2 other sanitary appliances.


- One toilet pan connector
- Two 40mm side inlets to connect a basin, elevated shower/bath or bidet
- Pumps up to 5m vertically or 52m maximum horizontally
- Motor 0.47 kW, 240 V/50Hz
- Dimensions: 482 x 278 x 180mm (width-height-depth)
- 64 dB noise level
- 2 year warranty
- Outlet Size 25mm Pressure Pipe
- Macerator requires 6 litre flush

*May not be suitable for commercial applications.




Specifications


Pumping height and distance

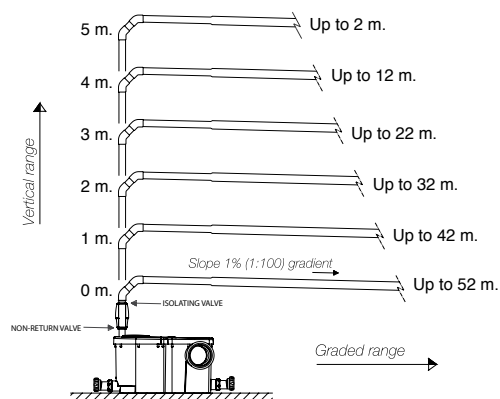

Macerator dimensions

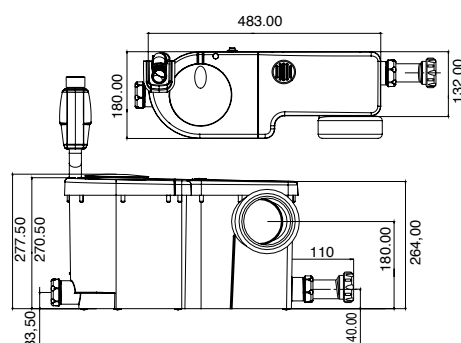

Components

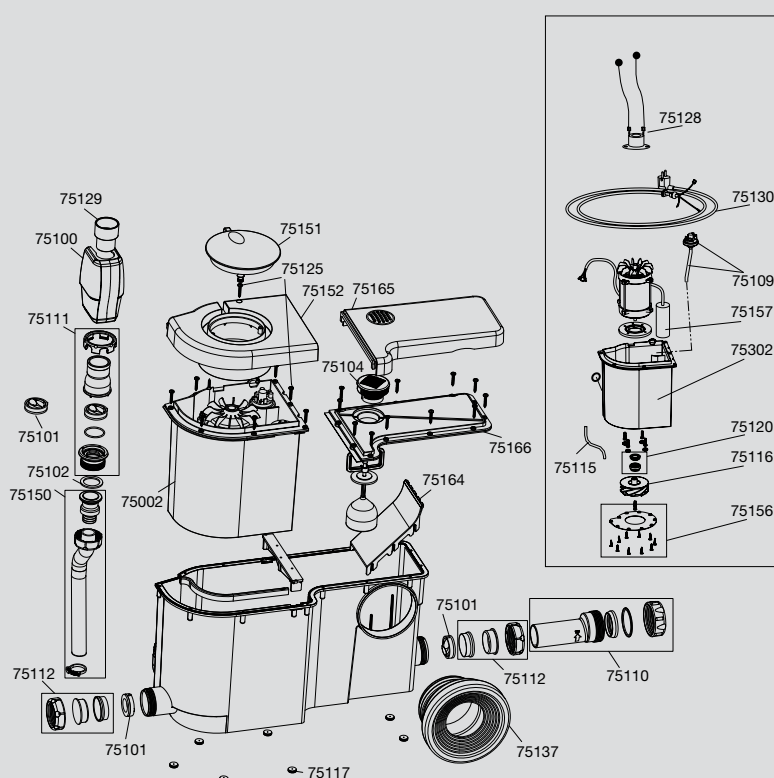

75002	Cassette set
75100	Check valve trimming cover
75101	Check valve
75102	Check valve flat joint
75104	Activated carbon cartridge
75109	Pressure switch with pipe
75110	Inlet adaptor
75111	Check valve set
75112	Side catch cap
75115	Pressure switch pipe
75116	Rotor
75117	Lower body limits set
75120	Ceramic catch
75125	Fixing screw
75128	Triac Kit
75129	Outlet adaptor
75130	Cable with plug
75137	Toilet sleeve
75150	Impulse pipe
75151	Upper Trimming Cover
75152	Cassette layer
75156	Outer blade set
75157	Condenser
75164	Internal slope
75165	Body trimming cover
75166	Body watertight set

LS Lifting Station

The Ciclon LS lifting station is for installing auxiliary plumbing/kitchen fixtures (basins, showers, sinks, bidets) or electrical appliances (washing machines or dishwashers) in non-conventional areas.

- Two 40mm top connections
- Three 40mm lateral adaptors with non-return valve
- Pumps up to 7m vertically
- Up to 72m maximum horizontally
- Motor 0.39 kW 240V/50Hz
- Dimensions: 413 x 270 x 180mm (width-height-depth)
- 64 dB noise level
- 2 year warranty
- Outlet Size 25mm Pressure Pipe
- Macerator requires 6 litre flush


*May not be suitable for commercial applications.




NOTE: Adaptable up to five appliances, refer AS 3500.

Specifications


Pumping height and distance

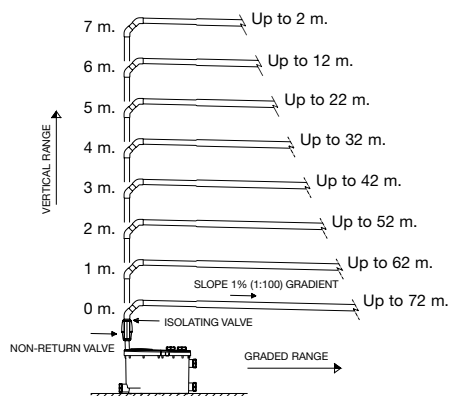

Lifting station dimensions

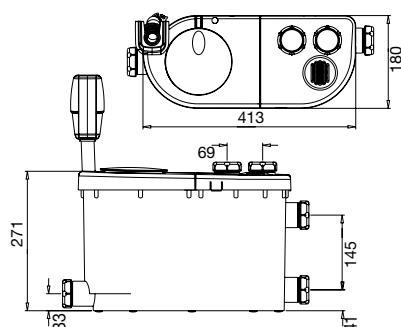

Unit is supplied with three adaptors.

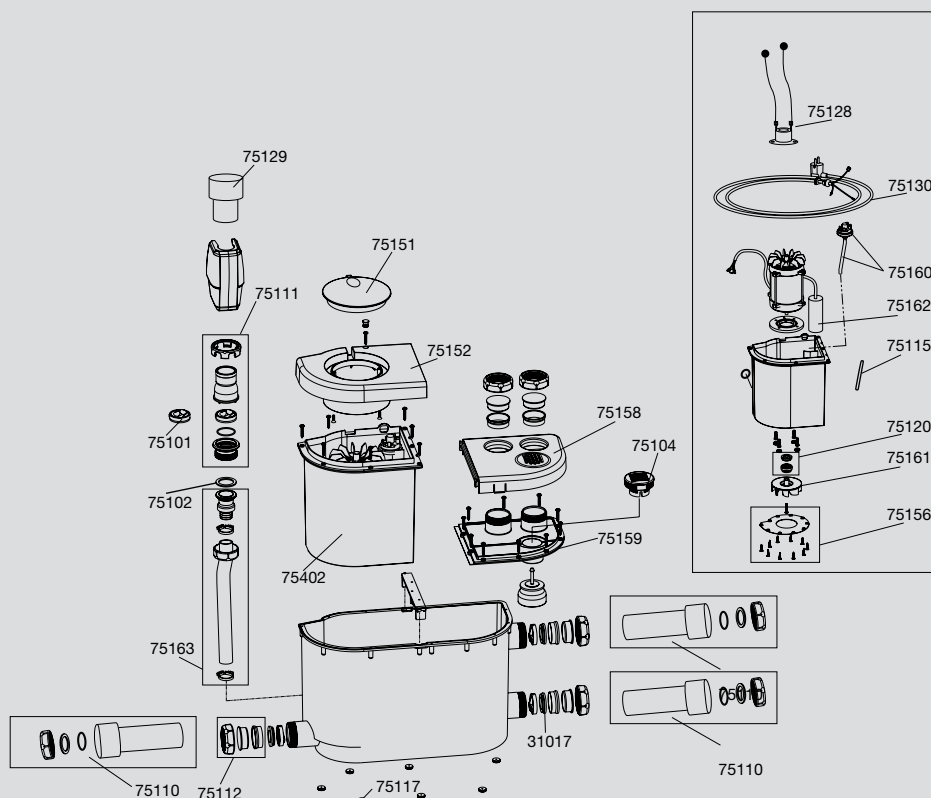

Components

31017	Reduced joint 1 1/2 x 32
75101	Check valve
75102	Check valve flat joint
75104	Activated carbon cartridge
75110	Inlet adaptor
75111	Check valve set
75112	Side catch cap
75115	Pressure switch pipe
75117	Lower body limits set
75120	Ceramic catch
75128	Triac Kit
75129	Outlet adaptor
75130	Cable with plug
75151	Upper trimming cover
75152	Cassette layer
75156	Outer blade set
75158	Deposit cover
75159	Watertight layer
75160	Pressure switch
75161	Rotor
75162	Condensor
75163	Complete impulse pipe
75402	Cassette set

Reece. Works for you.™

Call **1800 032 566** or visit **www.reece.com.au** for your nearest Reece store.

The manufacturer/distributor reserves the right to vary specifications or delete models from their range without prior notification. The manufacturer/distributor takes no responsibility for printing errors.

V6 [BROCHURE CODE 2130183]

