


Posh Bristol Pin Basin Mixer & Extended Basin Mixer (5 Star) Lead Free



Prior To Installation

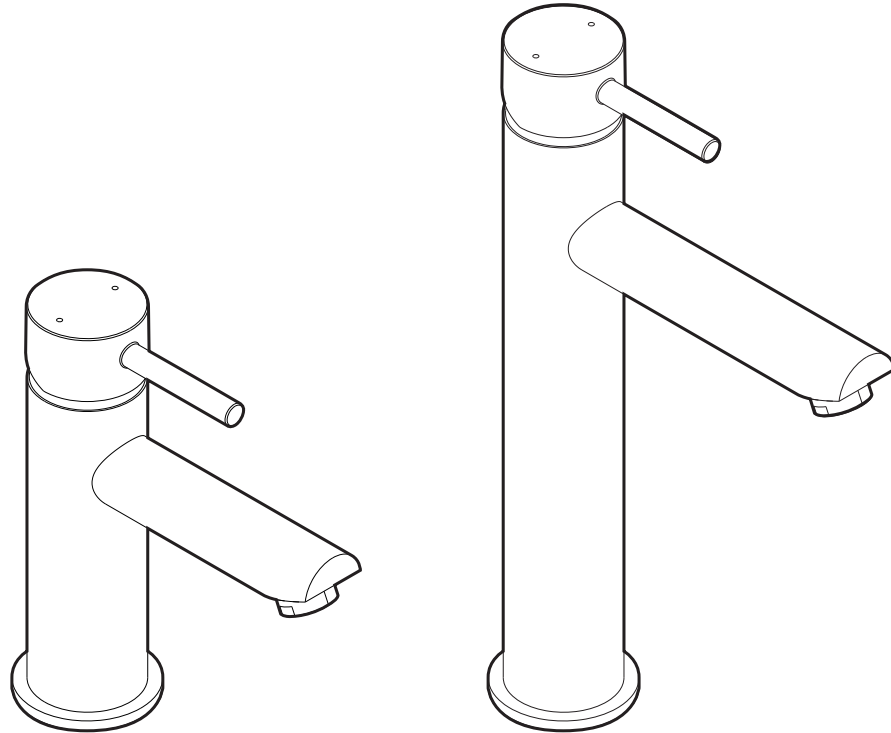

Mixer must be installed to the requirements of AS/NZS 3500 by a qualified plumber. Your mixer comes to you already factory assembled and tested. We do not recommend the dismantling of any internal part of the mixer. The mixers are factory tested and sealed so as to give the best performance.



Avoid prolonged exposure to any chemical solution containing chlorides or acids. Surface damage caused by acids will void warranty.



Do not use steel wool or any abrasive cleansers.



Clean with mild detergent or clear liquid cleansers. Wipe dry with a clean soft cloth.



All mixers should be installed with isolating stop valve.



Flush out new pipe work prior to connecting the new mixer.



In compliance with the lead-free requirements of the National Construction Code Volume 3.



Recommended pressure range 150 – 500KPa.




Max Continuous Working Pressure 1000 Kpa.
Max Continuous Working temperature 65 Deg.

NOTE: Do not over tighten hose tail into the mixer, do not stretch the flexi hoses.
Do not twist hose braiding to tighten hoses, do not excessively bend hoses.
Do not use Teflon tape or thread locking compound on any of the threaded connections.


Posh Bristol Pin Basin Mixer & Extended Basin Mixer (5 Star) Lead Free

Diagram

Posh Bristol Pin Basin Mixer (5 Star) Lead Free

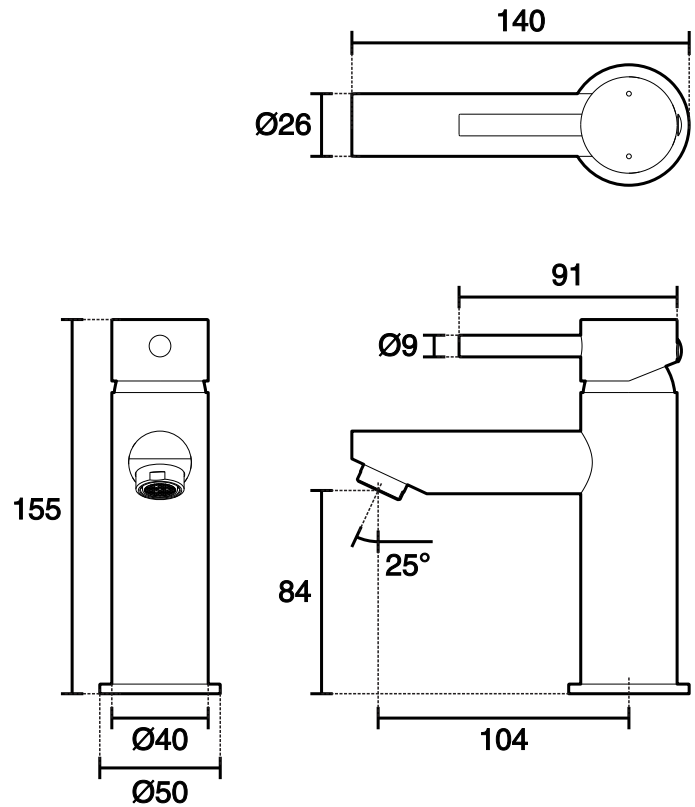

Posh Bristol Pin Extended Basin Mixer (5 Star) Lead Free

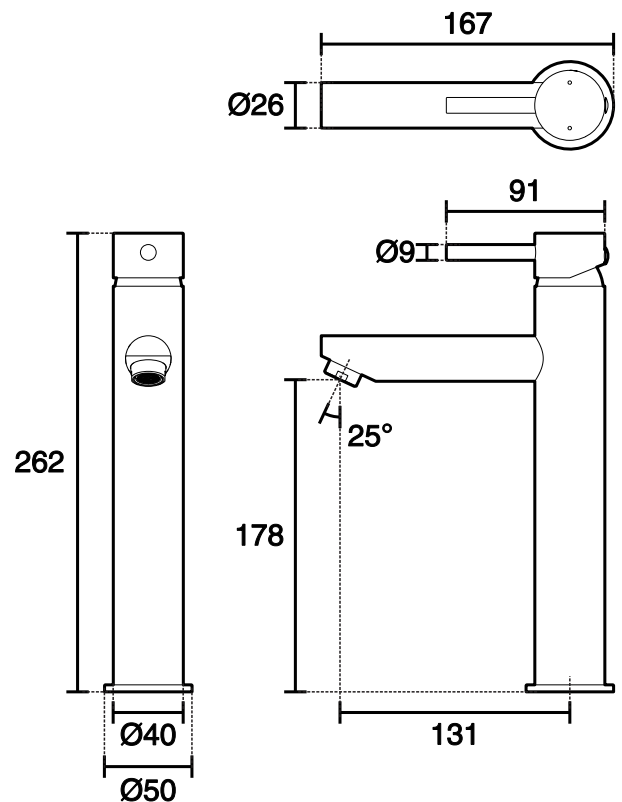

Posh Bristol Pin Basin Mixer & Extended Basin Mixer (5 Star) Lead Free

Installation



Important Flush out new pipe work prior to connecting the new mixer.




Important If removing aerator to flush lines or maintenance ensure that it is tightened firmly when re-fitting to prevent removal by hand.

Note: This tap is suitable for high pressure applications where both hot and cold water supply pressures are at 150kpa or above.

Note: Mixer requires 35mm diameter mounting hole.


Note: Maximum deck thickness 40mm.

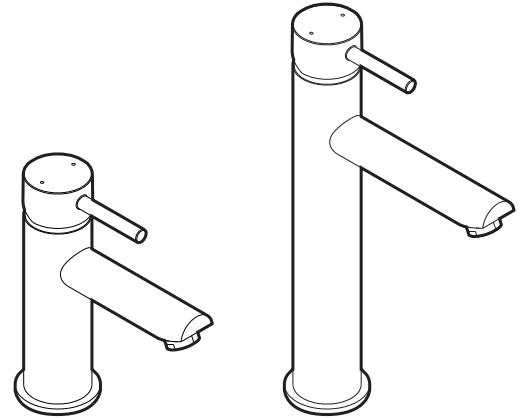

1. Fit fixing kit shanks (A) to bottom of the mixer body (B) and position rubber sealing washer and Dress Ring (C) over tap hole.

2. Place the tap body (B) into the mounting hole, making sure that the flexible hoses are firmly tightened into the tail extensions at base of the body (B).

Note: DO NOT use teflon tape on threads.

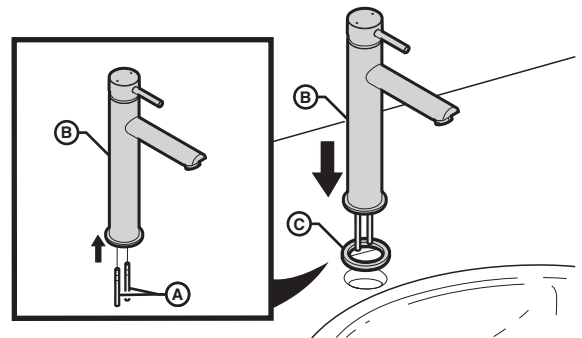

3. Connect both the hot and cold flexible hoses (D), tighten firmly by hand then half a turn further using a wrench.

4. From underneath, apply horseshoe washer (E) prior to positioning the horseshoe plate (F).


5. Lock the mixer to the basin or benchtop by tightening the locking nuts (G).

6. Connect both the hot and cold flexible hoses (D) to their respective water supplies.

7. Ensure that the hoses (D) are not under tension, twisted or kinked.




Check for water leaks after installation.

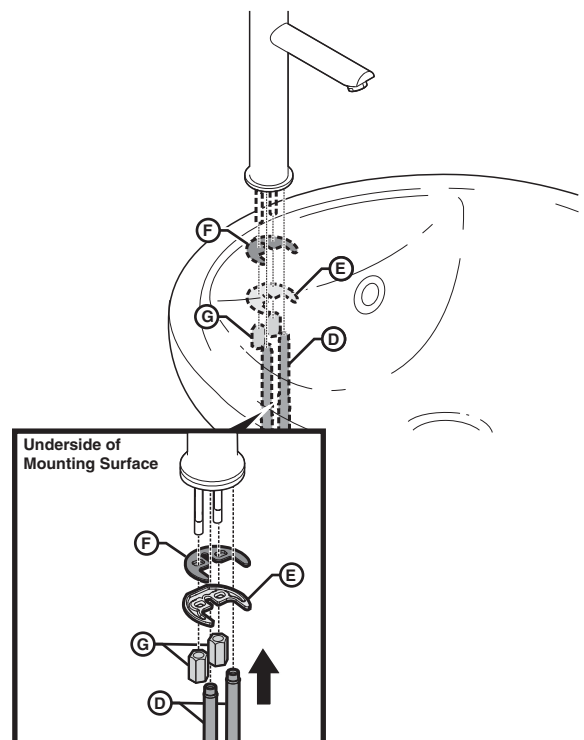

Posh Bristol Pin Basin Mixer & Extended Basin Mixer (5 Star) Lead Free

Servicing - Replacement of Cartridge

1. Remove decorative cover **(A)** and unscrew the grub screw **(B)** using an allen key.
2. Lift off the handle **(C)** and remove the cartridge dome **(D)**, unscrew the brass locking nut **(E)** and lift out the cartridge **(F)**.
3. Replace the cartridge **(F)** ensuring it is located correctly, the locking nut **(E)**, the cartridge dome **(D)** and the handle **(C)**.
4. Using allen key, tighten grub screw **(B)** and push in decorative cover **(A)**.

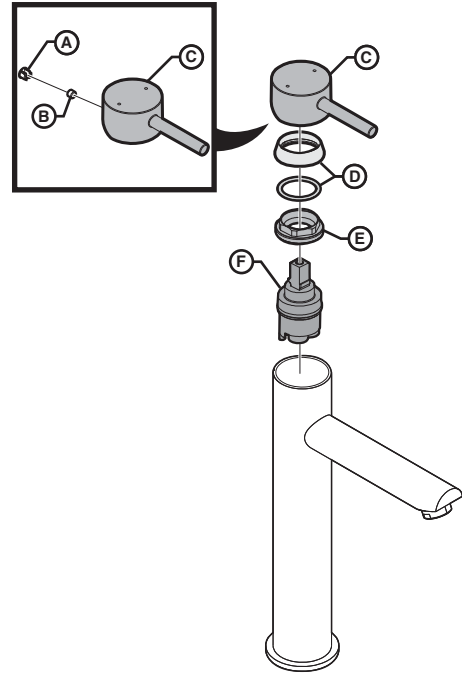

Care Details

We recommend the use of soapy water or approved cleaners. This product should not be cleaned with abrasive materials. Damage caused by any improper treatment is not covered by the product warranty - refer to Warranty Conditions.

Plumbers, please ensure a copy of the installation instruction is left with the end user for future reference.