

caroma

Cameo 4.5/3 litre Cistern

PLUMBERS' INSTALLATION INSTRUCTIONS

PLEASE READ CAREFULLY BEFORE INSTALLATION

CLOSE COUPLED CISTERN FIXING PROCEDURE

Standard Right Hand Bottom Inlet

Note: The inlet valve can be changed from right to left.

The cistern fixes directly to the pan with a robust base fixing system without the need for wall fixing.

- 1- Ensure the pre-fixed foam seal at base of cistern is securely attached to cistern base, as detailed in **Fig. 2**.
- 2- Locate cistern fixing bolts into pan fixing holes and secure cistern to pan with nylon washer, SS washer and SS nut, as detailed in **Fig. 2**.
- 3- Flush the lines and connect water supply and check operation of cistern.
- 4- Adjust water level. Turn on water mains. Open the cistern stop valve and check the operation of the mechanisms and valve. Adjust water level to the water level mark inside the cistern by simply turning the float arm adjustment screw in a clockwise or anti clockwise direction as detailed in **Fig. 3**.

- 5- Fit lid to check push button operation to complete installation.

Back inlet installation

- 1- Ensure the prefixed foam seal at base of cistern is securely attached to cistern base.
- 2- Lower cistern onto pan, allowing the two fixing bolts to locate into holes in the pan. While lowering cistern onto pan, angle the top of the cistern away from the wall until the cut-out clears the connection nipple in the wall.
- 3- Fit the supplied nylon washer, SS washer and SS nut onto the bolts and tighten securely.
- 4- Fit cistern stop valve (supplied) to the 1/2" B.S.P. nipple in the wall using approved thread seal, in the downward angled position 45° to the right hand side, as detailed in **Fig. 4**.
- 5- Flush the lines before connecting the flexible hose to the stop tap and ensure the hose is not rubbing against the inside of the cistern.
- 6- Turn on water mains. Open cistern stop valve and check for leaks and operation of mechanisms and valves. Ensure there is no leakage from the cistern into the pan.
- 7- Adjust water level to the 4.5 litre water level mark inside the cistern by simply turning the float arm screw in a clockwise or anti-clockwise direction as detailed in **Fig. 4**.
- 8- Fit cistern lid to check push button operation to complete installation.

Important: Working pressure minimum 30kPa to maximum 1000kPa flow pressure. Rain water tank compliant.

IMPORTANT: THE INLET VALVE IS FITTED WITH A LINE STRAINER. ITS TAIL IS CENTRALLY LOCATED TO ALLOW EASY REMOVAL FOR CLEANING. THIS TAIL FITS EASILY INTO THE COPPER CONNECTION PIPE. INSTALLATION OF THE CISTERN WITHOUT THE STRAINER CAN LEAD TO DAMAGE OF THE INLET VALVE FROM THE WATER-BORNE CONTAMINANTS LEADING TO CISTERN MALFUNCTION.



IMPORTANT

TO ACHIEVE A SATISFACTORY 4.5/3L FLUSH PERFORMANCE AND A 4 STAR WATER EFFICIENCY RATING THE CISTERN MUST BE MATCHED WITH A COMPATIBLE CAROMA SMARTFLUSH 4.5/3L TOILET PAN.

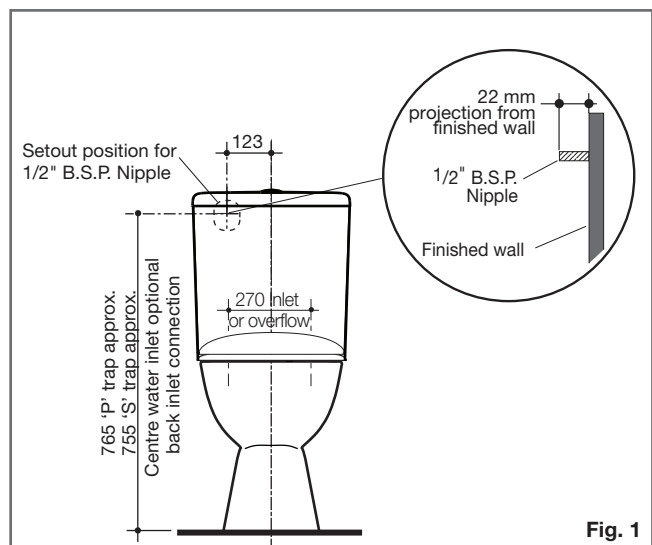


Fig. 1

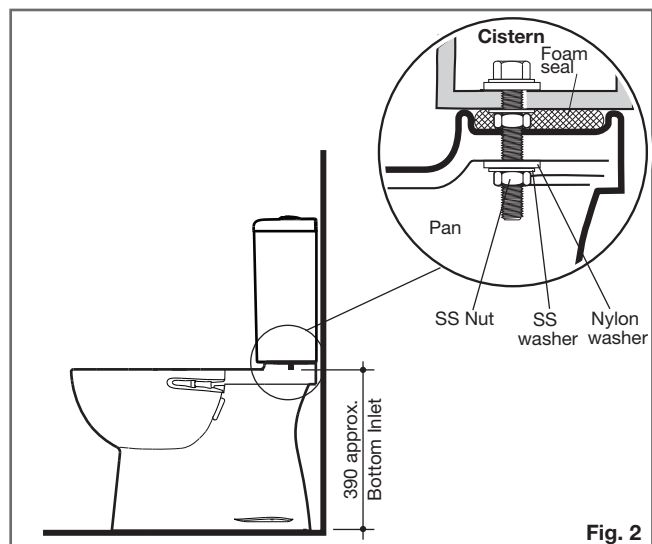


Fig. 2

Float Arm Adjustment Screw

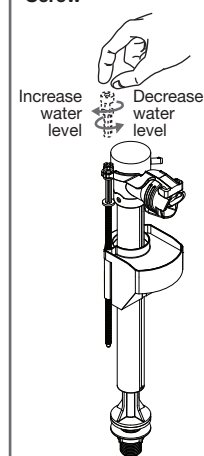


Fig. 3

Stop Valve and Inlet Valve Detail

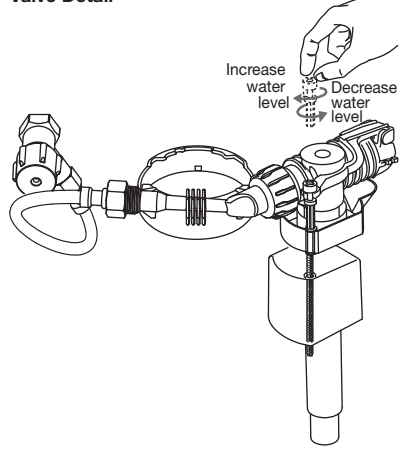


Fig. 4

All measurements are subject to accepted manufacturing tolerances. To ensure accuracy please check actual product dimensions before drilling for installation. The manufacturer reserves the right to change specifications at any time without giving prior notification. This product should be installed by a qualified plumber. Local authority, Water Board, and Building Regulations may apply to the installation of this product, and you should consult the appropriate bodies on these requirements.