

# BIS Rubber Absorption Piece

(F05 25)

noise insulation for rail

A



B




C




## Features and Benefits

- noise insulating element
  - e.g. for noise insulating suspension of fixing rail in combination with threaded rod M10
  - rubber absorption pieces are suitable to use with RapidStrut® Rails and RapidRail® Profiles
  - material: metal parts made of steel; silent block made of TPE rubber, black
  - noise insulation up to 16dB(A) on average, when combined with RapidRail® 27x18, compared to directly installed clamps
- zinc plated



RapidRail®




RapidStrut®


Part No.	Type	R	B (mm)	H (mm)	F <sub>a,z</sub> (N)	Pack 1
A 4125007	M	10.1	30	19.5	-	100
B 4125008	F	10.1	30	10.0	-	100
C 4125006	M + F	10.1	30	23.0	600	50

*The maximum allowed load can be higher under strict conditions and is depending on the frequency, for conditions and details please consult our technical department.*


A

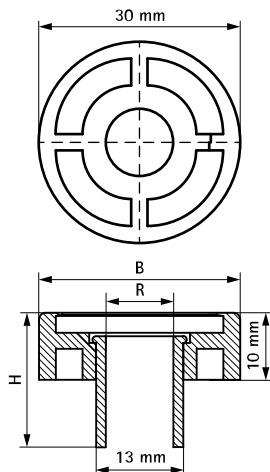

B

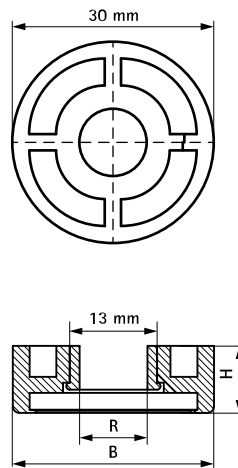

C

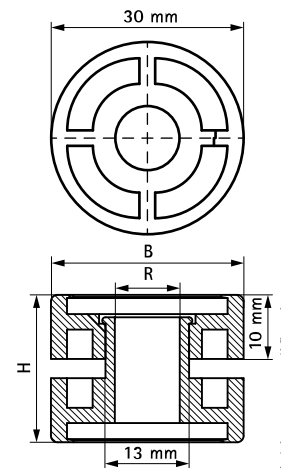

### Complementary

- BIS RapidStrut® Fixing Rail (pg)
- BIS RapidStrut® Fixing Rail Double (pg)
- RapidRail® Fixing Rail

### Complementary

- BIS Threaded Rod