


# AXON BASIN MIXER SET

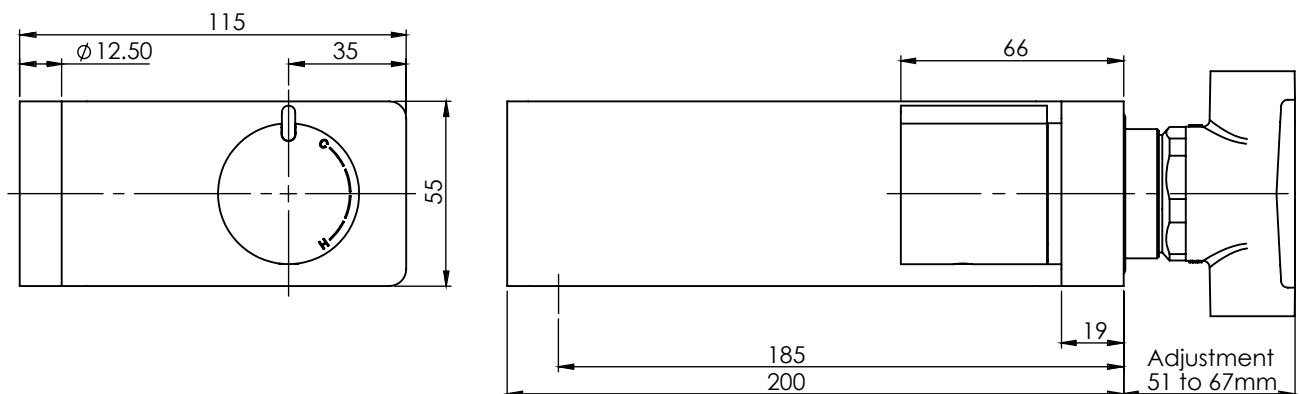

Dimensions are nominal measurements only.

## SPECIFICATIONS

<b>Recommended Use</b>	Domestic, hotel and commercial
<b>Finish Available</b>	Chrome Handle with Chrome Outlet Chrome/Black Handle with Black Outlet Rose Gold/Black Handle with Black Outlet
<b>Pressure Rating</b>	Maximum continuous operating pressure 500 kPa. Note: For best performance and longer life we recommend 150-500 kPa.
<b>Temperature Rating</b>	Maximum continuous working temperature 75°
<b>Suitable Hot Water</b>	Storage Tank: Yes Continuous Flow: Refer to manufacturer of continuous hot water systems Gravity Feed: No




To see the complete MILLI range go to  
[www.reece.com.au/bathrooms](http://www.reece.com.au/bathrooms)

## CLEANING RECOMMENDATIONS

We recommend the use of soapy water or approved cleaners.

This product should not be cleaned with abrasive materials.

Damage caused by any improper treatment is not covered by the product warranty - refer to Warranty Conditions.

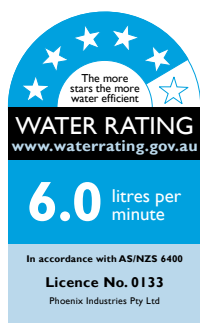

Disclaimer: Products in this specification manual must by regulation be installed by licensed and registered trade people. The manufacturer/distributor reserves the right to vary specifications or delete models from their range without prior notification. Dimensions are nominal measurements only. Dimensions and set-outs listed are correct at time of publication however the manufacturer/distributor takes no responsibility for printing errors.  
Tech Page Version 4



# AXON BASIN MIXER SET

## INSTALLATION INSTRUCTIONS

### Important Note

Mixer must be installed to the requirements of AS/NZS 3500 by a qualified plumber. Your mixer comes to you already factory assembled and tested. We do not recommend the dismantling of any internal part of the mixer. The mixers are factory tested and sealed so as to give the best performance.

#### WATER SUPPLY REQUIREMENTS

**Recommended Working Pressure**

**Maximum hot water temperature**

**Note:**

- If the pressure exceeds or is likely to exceed 550kpa, an approved pressure limiting device must be installed.
- Flush out all pipe work prior to installation.
- If the water temperature exceeds 75°C, an approved tempering valve must be fitted.
- Installation should comply with Australian standard AS3500.1 or relevant local authority requirements.

Failure to comply with the above may void all warranties.

**Maintenance and Care**

- Chrome plated surfaces should be cleaned with mild liquid detergent or soap and water.
- Do not** use cream cleaners or citrus based cleaning products, as they are abrasive.
- Use of unsuitable cleaning agents may damage the surface. Any damage caused in this way will not be covered by warranty.

**Mixer Operation**

**Removing The Aerator Retainer**

Remove the screw, Screw T-Tool onto Aerator Retainer. Shake and pull T-Tool to remove Aerator Retainer.

To remove Aerator Retainer without T-Tool, place your hand underneath the aerator retainer. Turn on water gradually until the aerator retainer is washed out into your hand.

#### MILLI AXON WALL MIXER WITH OUTLET INSTALLATION INSTRUCTIONS

**1** Fasten screws to secure Wall Breach Assembly in place.

**2** Attach water supplies. **TEST AND CHECK FOR LEAKS**

Create Ø45mm and Ø25mm round holes 55mm apart, centre to centre, in cement sheet.

**3** Tile around the wall breach assembly and make sure the cuts are covered by the cast outlet.

Remove the plastic protective cover from the mixer body.

**4** Check if Restrictor is fitted into Retainer.

Screw the retainer and the restrictor into the G1/2" tail.

**5** Screw on the cartridge extension in the distance of 55mm from the wall. Fasten the grub screw firmly onto Flat Surface.

Cut the G1/2" tail to length. Apply Teflon tape to G1/2" Tail. Ensure that O-rings are fitted to Outlet Adaptor. Screw on G1/2" Outlet Adaptor.

**6** Fit O-ring to the back of the cast outlet. Push the cast outlet into position gently.

Hand fasten the mixer locknut onto Wall Breach Assembly. **Do not tighten it until the cast outlet is secured with a grub screw in the**

**7** Fasten Grub Screw firmly. Fasten the mixer locknut firmly with a spanner.

**8** Ensure that the nylon washer is fitted into the recess on the mixer locknut.

Set the cartridge to off position by turning the cartridge spindle Anti-Clockwise until it stops.

Push on the mixer handle. Fasten the grub screw firmly. Push on the screw cap.

IN0228 revA