

Blossom Shaving Cabinet


Mirror should be installed by a qualified, licensed trade person.

Cabinet Fitting Instructions

- Prior to installation it is important to inspect the cabinet to ensure no damage has occurred in transit. If damage has occurred, or a visible defect exists, do not proceed with the installation and advise supplier immediately. No warranty claim for damage will be accepted if the vanity is installed.
- Prior to installation check wall/tile surface where unit will be fitted is flat and even. Installing on uneven wall will result in the unit twisting – DO NOT PROCEED.

PLEASE NOTE: MANUFACTURER WILL NOT BE LIABLE FOR THE COST OF INSTALLATION OR REMOVAL OF THE MIRROR & THE WARRANTY WILL BE VOIDED IF DAMAGE OCCURRED DURING INSTALLATION.

1. Prepare install space - clean, level wall.
2. Check that the shaving cabinet will fit into the location. On timber studded walls, mark the positions of the studs, so to be able to fix the unit to these later.
3. To aid installation; first remove the doors by unclipping the hinges from the mounting plate using the press release at the end of the hinge. The hinges will then unclip from the unit.
4. Place doors in a secure location in the meantime.
5. Mark where unit is to be installed.
6. Ensure the shaving cabinet is installed level; as this will affect the alignment of the doors.
7. If possible, screw through back of the shaving cabinet at the level where the adjustable shelves will be placed. This way the screws will be hidden by the shelves. **ENSURING SCREWS ARE FIXED TO STUDS.** Allow enough fixing points at the top and bottom of the back panel.
8. Reattach the doors.
9. Install internal shelves, placing the shelf pins into the appropriate brass bushes.
10. Adjust the door hinges, ensuring the doors are even, level and closing correctly.

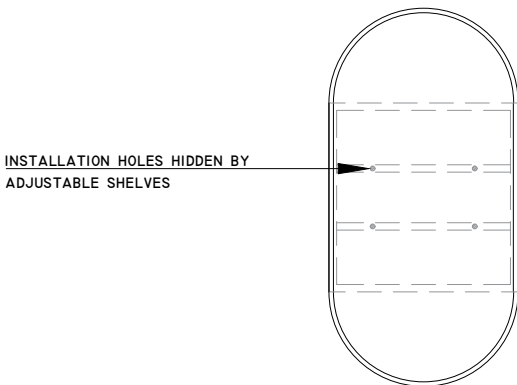

REMOVE DOOR




1. Remove the hinge cover plate




2. Push down clip and release hinge from the mounting plate

SIDE TO SIDE ADJUSTMENT

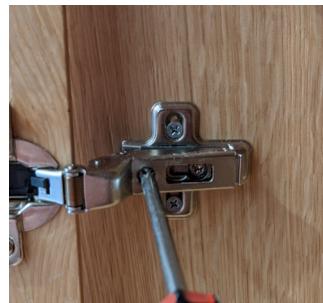

1. Turn left/right for side to side adjustment.

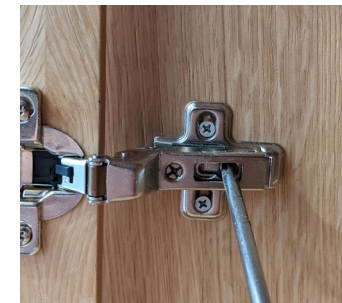

2. Turn left to right for depth adjustment.

HEIGHT ADJUSTMENT



1. Loosen all the mounting plate screws on the door. Raise or lower the door to the required height. Ensure the plates are now in the correct position. Re-tighten the mounting plate screws.

