


Memo Oscar Double Bowl Sink Inset Overflow 1 Taphole



Compliance

Important

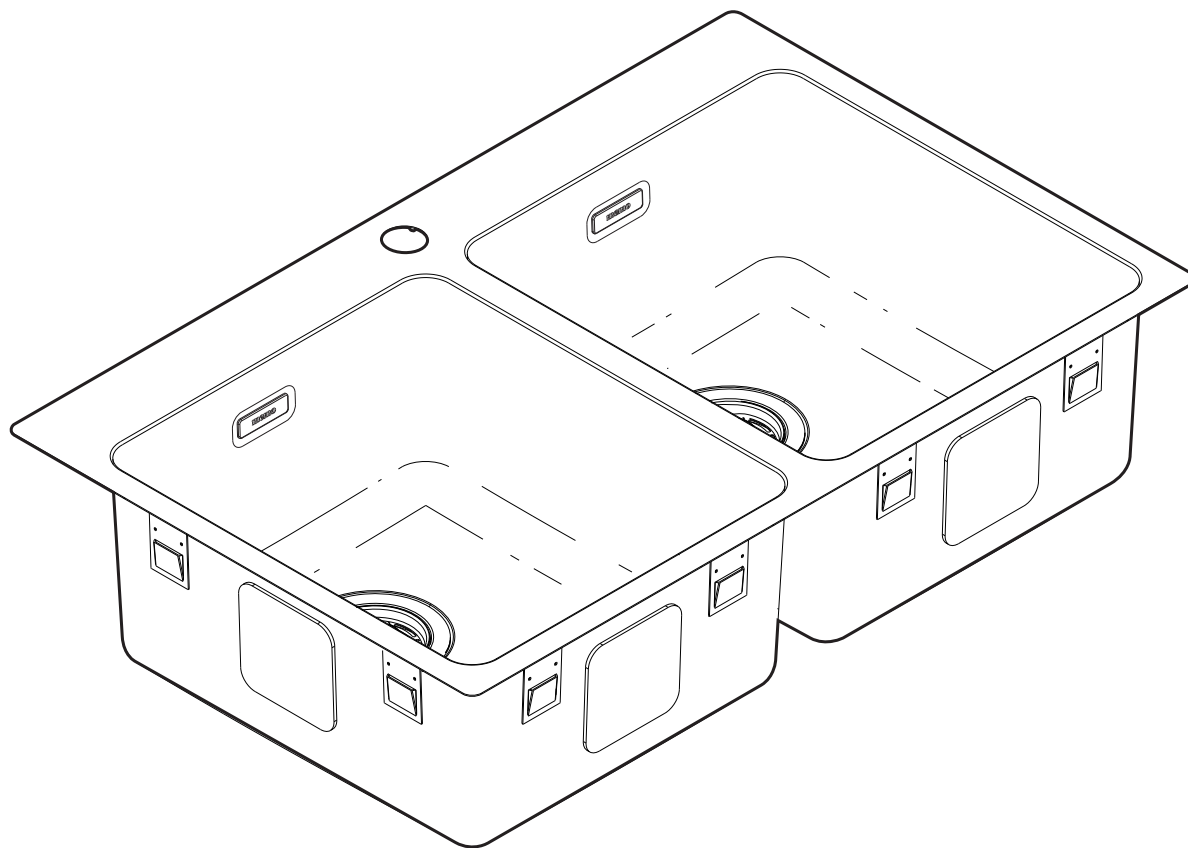

Comply with current Drainage and Plumbing Regulations as required by your local authority. Sanitary plumbing shall only be carried out by a Registered Plumber. All plumbing work must be done in accordance with local and national building and plumbing codes as applicable.

Installation Precautions

Important



Do not leave any debris, residue or tools that may cause damage to sink surface during or after installation.

Important



Only use approved cleaners or products that are recommended for cleaning and maintenance of stainless steel sinks.

Prior To Installation

Important



Check Bowl for any defects or signs of damage. Do not install if defects or damage found.

Important




Determine position that Bowl will be installed.

Memo Oscar Double Bowl Sink Inset Overflow 1 Taphole


Diagram

Memo Oscar Inset Double Bowl Sink Inset Overflow 1 Taphole

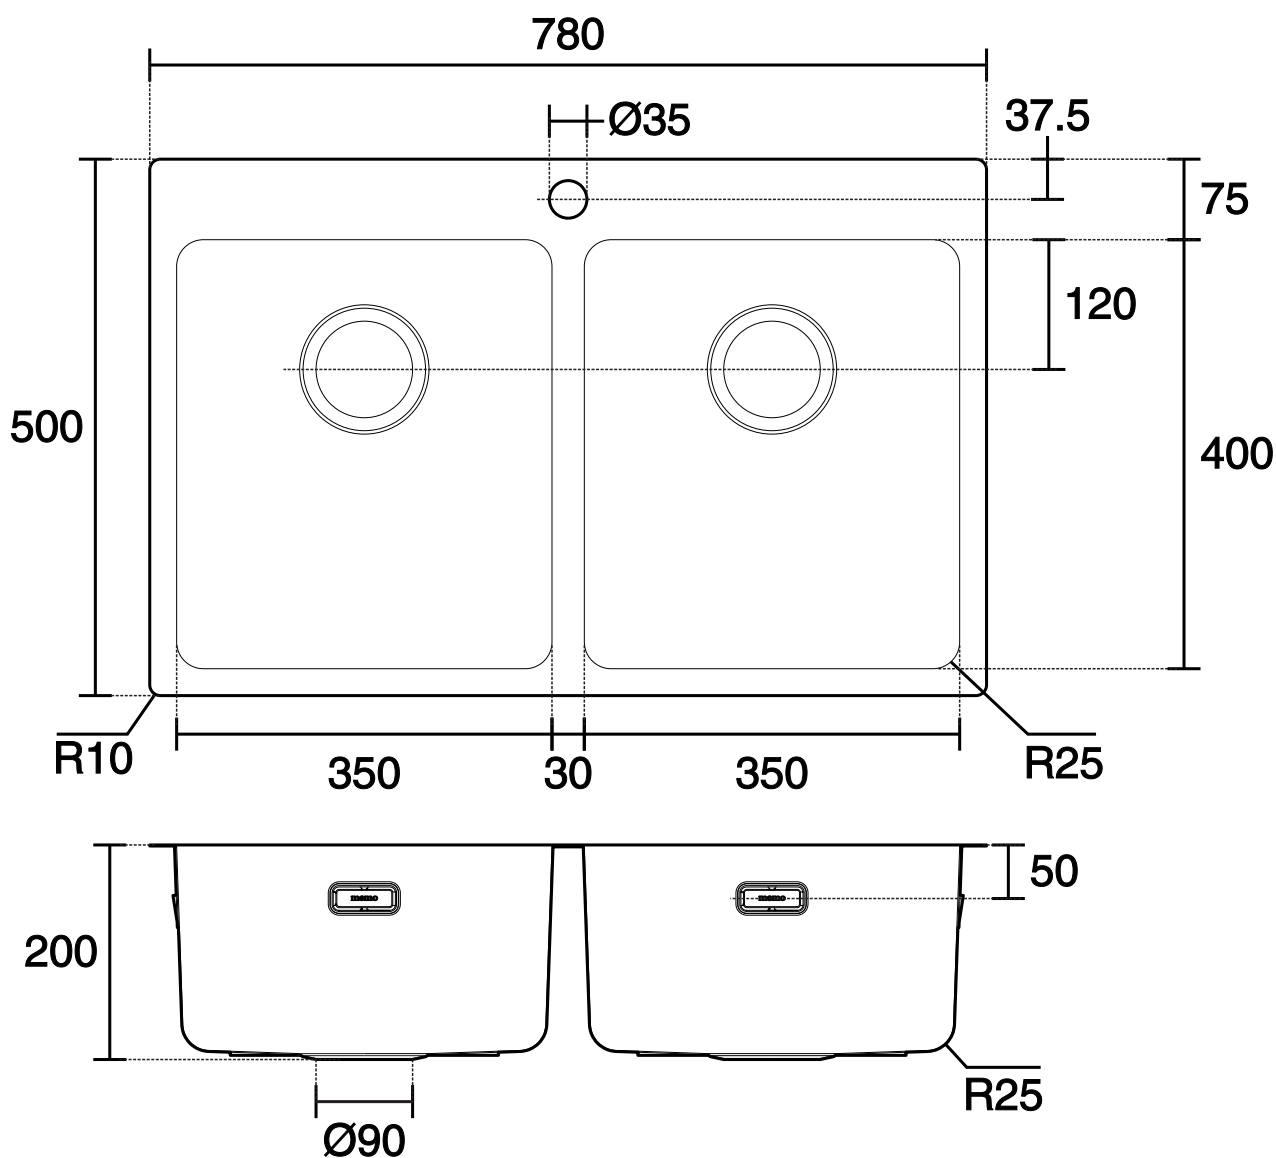

Memo Oscar Double Bowl Sink Inset Overflow 1 Taphole

Diagram - Overflow

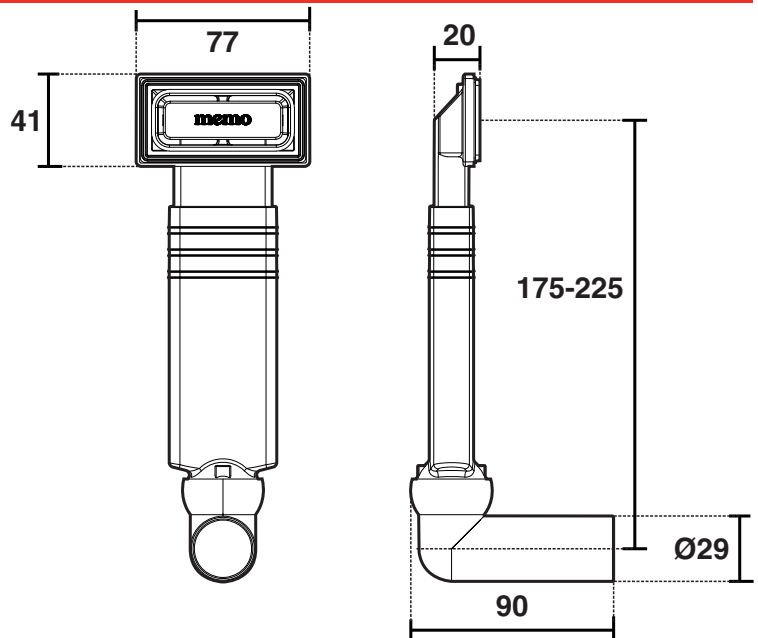


Installation


1. Use provided Template (A) to trace cut-out on both benchtop and underlay/timber lining.

Note: Check Template (A) is correct to match Sink.

2. Cut out Bench Top (B).

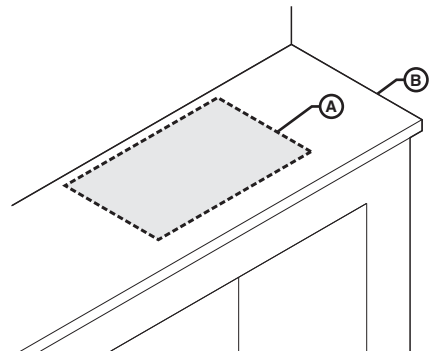

3. Apply adhesive backed foam Strip Seal (C) to underside rim of sink in continuous motion.

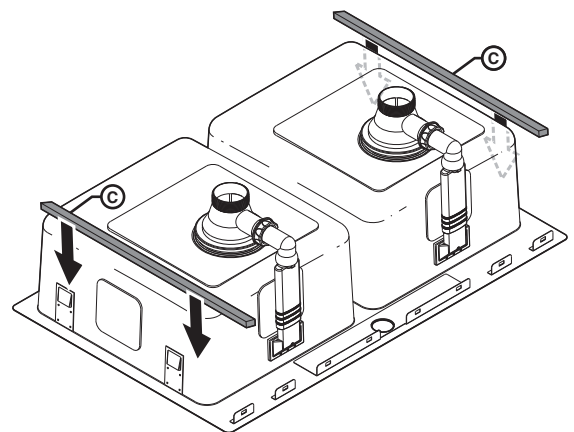

Memo Oscar Double Bowl Sink Inset Overflow 1 Taphole

Installation


4. Pre-Fit supplied Overflow Basket Waste & External Overflow Kit (D) to Sink (B), ensuring all connection are firmly tightened.

5. Fit supplied Swing Clip (E) to back railing.




Note: If desired, tapware can also be fitted to sink at this stage.

6. Place assembled Sink (B) into benchtop, align and cut out.

Overflow

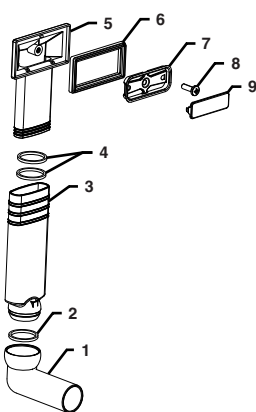

Waste

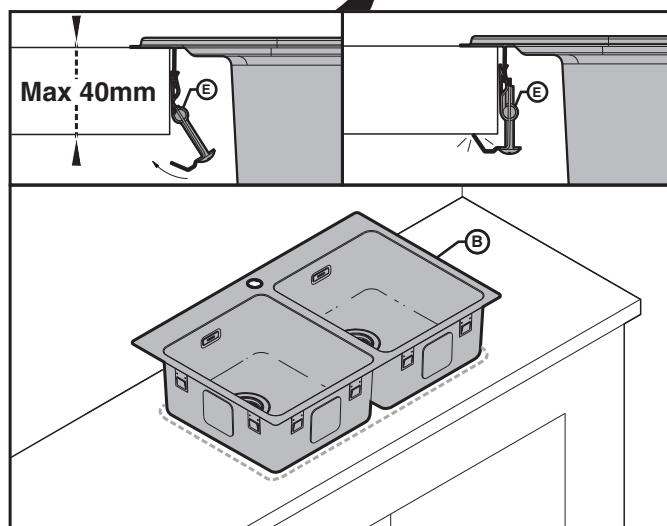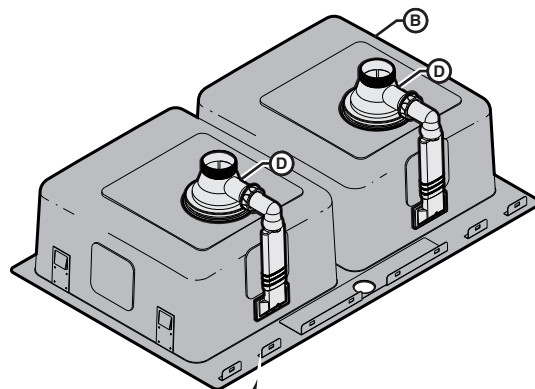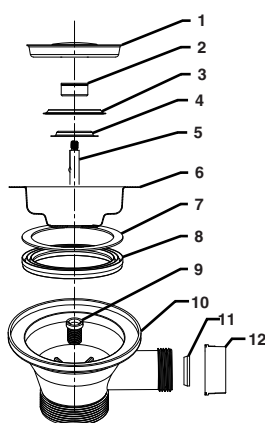


7. From underneath, install Mounting Clips (F) by inserting into grooved slotted tabs.

Note: Mounting Clips are suitable for benchtops up to 40mm thickness.

8. Secure Sink (B) to Benchtop (G) by tighten bolt on the clip. Alternate between clips to ensure an even seal.

9. Once all plumbing connection have been completed, fill sink to overflow level then check for any leaks.

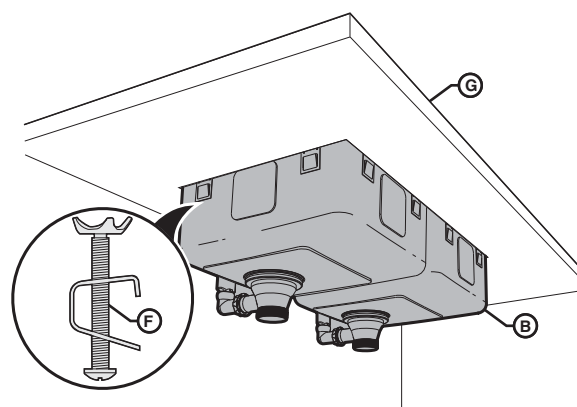

Care Details

We recommend the use of soapy water or approved cleaners. This product should not be cleaned with abrasive materials. Damage caused by any improper treatment is not covered by the product warranty - refer to Warranty Conditions on the last page.

Plumbers, please ensure a copy of the installation instruction is left with the end user for future reference.