



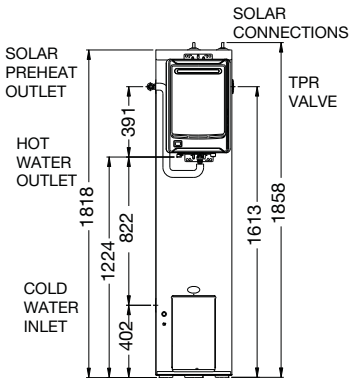

Features & Benefits

- Complete Frost Protection – Unique Drain-Back™ heat exchange technology
- Complies with regulations in all states
- Booster – 6-star 20 L/min continuous flow gas (factory fitted)
- Compact spilt system design
- 1 CSA2013, 2 NPT200 or 2 LCS collectors
- Eligible for STCs⁵
- 5 year cylinder warranty¹



MODEL	596160
Storage Capacity (L)	160
Solar Collectors	1 CSA2013, 2 LCS or 2 NPT200
Booster Type	Gas
Weight Empty (kg) - Tank	110
Water Connections	Rp 3/4
Gas Booster Water Connections	R 3/4
Gas Connections	R 3/4



Scan code for details & installation instructions

