



# THE RISING STAR

---

With its compact design, the new Thermann 6 Star Continuous Flow delivers 6 star energy efficiency, guaranteed reliability, all backed by a 12 year warranty.

---

---

# The Thermann Continuous Flow 6 star is packed with more intelligent features and innovative technology than ever before.

---

## 6 Star efficiency


Delivering cost savings year in, year out.

## Low pressure operation

Turns on with just 60kPa(16L), 90kPa(20L), 110kPa(26L) minimum water pressure.

## Manifolding ability

Allows 2 (26L) units to be connected for heavy use applications.

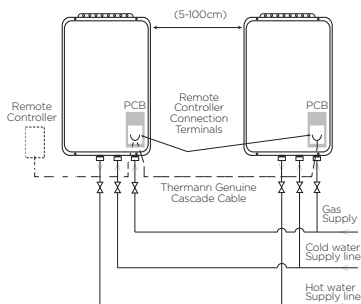

## Compact dimensions

H520mm x W350mm x D200mm size makes it easy to install in tight locations.

## 1.8m minimum run requirement

Provides greater flexibility of installation using 50°C limited model.



## New heat exchanger design

Warms water to desired temperature faster. The 60°C 20L & 26L models are adjustable up to 70°C for solar applications.

## Less parts

A small number of internal components for simple servicing.

## Sizing

16L, 20L & 26L models available in 50°C & 60°C.

## Intelligent PCB

A single PCB with surge and electromagnetic protection for reliability.

## Cable flexibility

Separate entry point for power cable and remote controller cables.

## Standard connection sizing

All water connections 20mm.

## Colour Coded Gas connection

Gas line is aluminium with yellow marking tape for simple identification.



## Universal compact controller (optional)

Allows the home owner to set different hot water temperatures at different points in the home.