


ALAPE

METAPHOR COUNTER BASIN

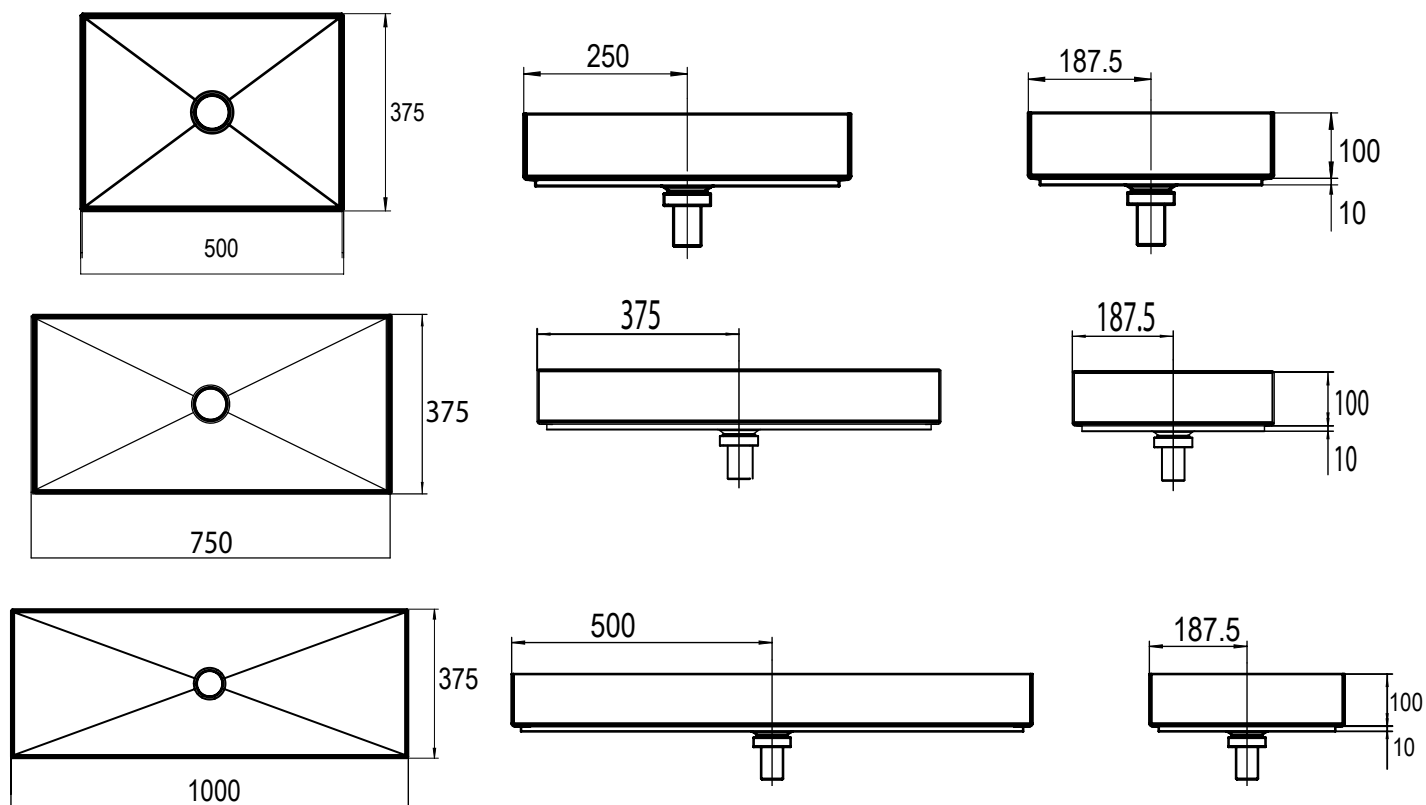

SPECIFICATIONS

Recommended use	Domestic, hotel, commercial
Material	Enamelled glazed steel
Colour	White
Fixing	Bench mounted installation (Silicone seal)
Size Option	500 x 375 x 110mm 750 x 375 x 110mm 1000 x 375 x 110mm
Capacity	500mm - 17L 750mm - 26L 1000mm - 35L
Weight	500mm - 9kg 750mm - 12.4kg 1000mm - 17.2kg
Taphole Option	500mm - No Taphole 750mm - No Taphole 1000mm - No Taphole
Overflow	No
Plug and waste	32 x 40mm plug and waste. (NOTE: European waste is supplied with the product. Not suitable for Australian application.)

Dimensions are nominal measurements only.



To see the complete ALAPE range go to www.reece.com.au/bathrooms

CLEANING RECOMMENDATIONS

We recommend the use of soapy water or approved cleaners.

This product should not be cleaned with abrasive materials.

Damage caused by any improper treatment is not covered by the product warranty - refer to Warranty Conditions.

Disclaimer: Products in this specification manual must by regulation be installed by licensed and registered trade people. The manufacturer/distributor reserves the right to vary specifications or delete models from their range without prior notification. Dimensions are nominal measurements only. Dimensions and set-outs listed are correct at time of publication however the manufacturer/distributor takes no responsibility for printing errors.

Tech Page Version 3


Alape[®]

reece[®]


ALAPE METAPHOR COUNTER BASIN

INSTALLATION INSTRUCTIONS

1. Position supplied cut out template onto the benchtop and mark off.
2. Cut hole into benchtop to template size and drill the fixing holes.
3. Fit selected tapware and supplied waste kit to basin.
4. Screw down fixing elements and align the basin over the cutout
5. Tighten screws to fix the basin
6. If desired all visible external edges can be joint sealed using flexible sealant ensuring to wipe off any excess.

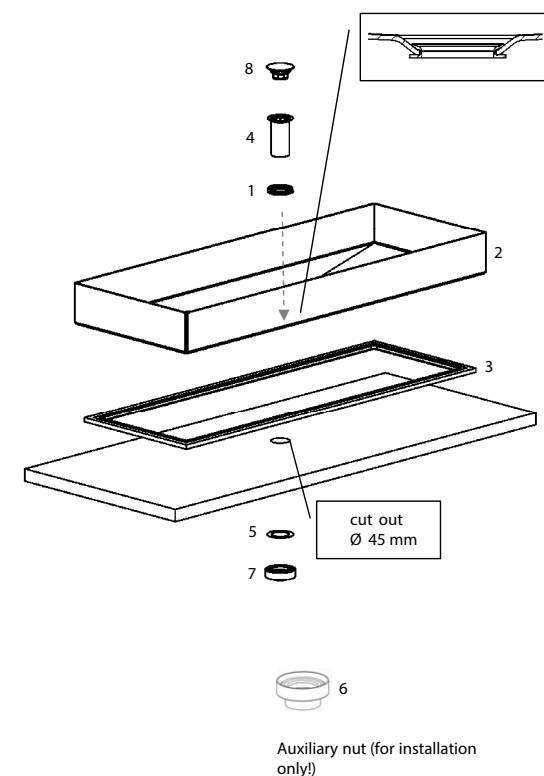


1. Adjust drain valve sealing ring in the basin drain hole.
2. Place sit-on basin (2) and spacer frame (3) on the counter top.
3. Mount drain valve (see reverse for installation instructions drain valve)

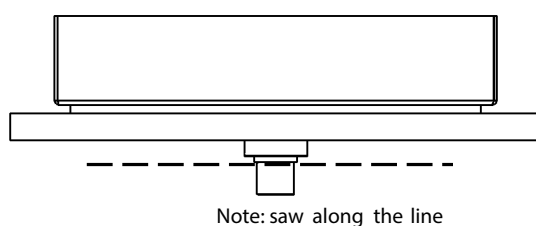

4. Insert drain valve (4) from above into the drain hole.
Tightly screw auxiliary nut (6) onto the drain valve from underneath. Use a saw to cut off bottom part of drain valve thread under the end of the auxiliary nut.

5. Unscrew auxiliary nut (6) and replace with chrome-plated fixing nut (7).

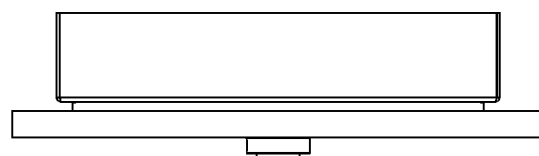

6. Mount drain valve cover (8).