

THIRD ANGLE PROJECTION.

## MOTOR SPECIFICATION


## 8061S148-01S CUSTOMER NO. Q.R. No. **CUSTOMER VARIOUS** 240 **50 AOM** VOLTS Hz Ph Duty MOTOR RPM. 890 3.2 **AMPS** RATING **410 WATTS** NOM. OUTPUT **CLOCKWISE AT DRIVE END ROTATION** CAPACITOR START μF/V RUN 15/370 μF/V **ENCLOSURE VENTED E/SHIELD AT LEAD END CSR** INSULATION CLASS **B130** MOTOR TYPE **AUTO RESET OVERLOAD** THERMAL PROTECTION **FAN - SHAFT UP APPLICATION** BEARING D.E. 6202 DDU. LONG LIFE, LUBRICATION WIDE RANGE 6202 DDU. BEARING N.D.E. SINGLE CORE 2000 ±30 BRAIDED SLEEVING SUPPLY LEAD **VIA SUPPLY LEAD EARTH PROVISION**



PAINT/ COLOUR

**RATING** 

## FINAL INSPECTED MOTORS MUST COMPLY WITH ELECTRIC MOTOR VIBRATION SPECIFICATION (ES049)

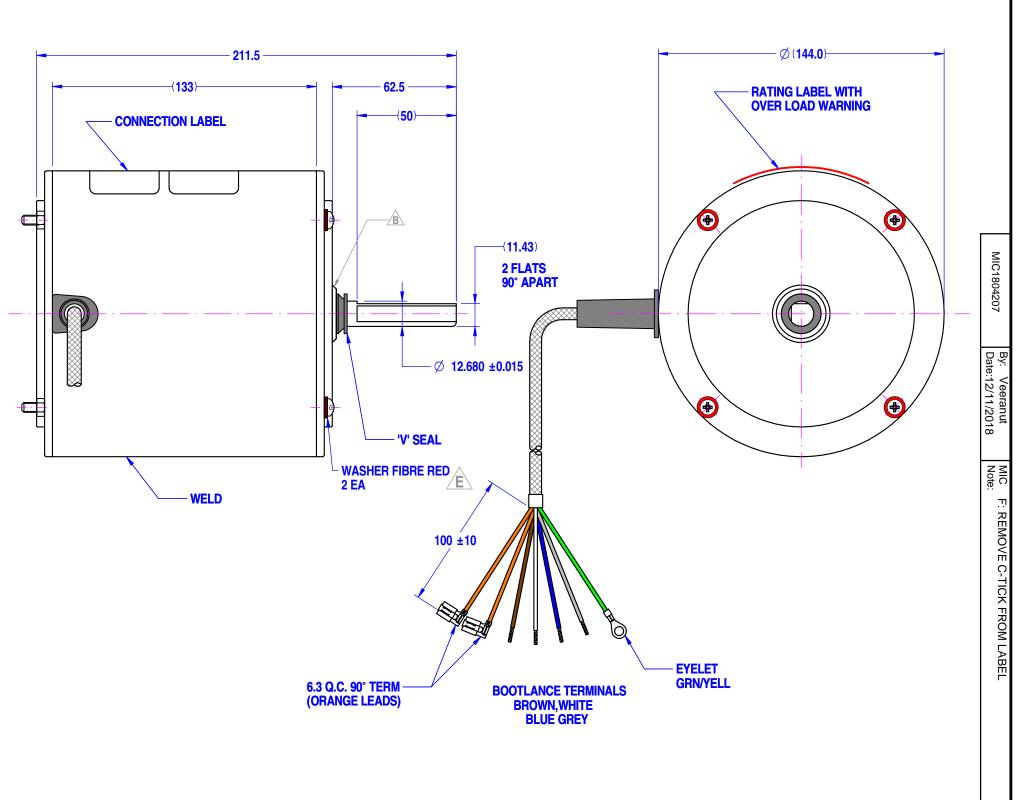

## SPECIAL REQUIREMENTS:

**BASIC BUILD** 

**SPECIFICATION** 

**PERFORMANCE** 

**SPECIFICATION** 

CONNECTION

- 1) CAPACITOR SUPPLIED BY CUSTOMER.
- 2) 'V' SEAL FITTED TO SHAFT AS PER ES057
- 3) MOTOR TO BE PACKED IN SINGLE CARTON
- 4)\_WASHER FIBRE TO BE FITTED ON TIE RODS D.E. ENDSHIELD.

305-570-05

SP85123-01

393-402-04



**PC GREY CASE** 

**PLAIN E/SHIELDS** 

**SSTDAUTO.FMT** 

DIMENSIONS ARE IN MM.
TOLERANCES
DECIMALS ANGULAR
.X ± 1.0 ± 30'
.XX ± 0.1

THIS DRAWING REMAINS THE PROPERTY OF FASCO

MOTORS AND MAY NOT BE USED, COPIED OR ISSUED WITHOUT WRITTEN PERMISSION FROM FASCO MOTORS

**UNLESS OTHERWISE SPECIFIED:** 

7.86 b

Kg

DRAWN muntana 12/07/2006

CHECKED Pipat 13/11/2018

RELEASED Suksakorn 13/11/2018

SCALE N.T.S.

MOTOR WEIGHT

FASCO THAILAND

29/7-8 MOO 3, BANGKRUAY - SAINOI Rd., BANGKRANG, MUANG NONTHABURI DISTRICT, NONTHABURI 11000 THAILAND FRAME MOTOR

STATUS B123:8557V-410-XAD

SHEET DWG NO

A3

DWG. NO. 8061S148-01S

REVISION

F