



## Milli Pure Top Mount Progressive Hob Mixer

### INSTALLATION GUIDE

Tapware is to be installed by a Licenced Plumber in accordance with AS/NZS 3500:2003


Recommended working water pressure 300-500kpa.  
Maximum water temperature is 65 deg.C.

#### Mounting Surface Requirements

- Hob Mixer: 48mm - 50mm Clearance Hole.
- Minimum Distance between Outlet and Mixer is 100mm centre to centre.
- Maximum Mounting Surface thickness is 40mm.
- Mounting Surface must be flat and level.

#### Progressive Hob Mixer

- Prior to installing remove the Clamping Plate and Clamping Ring.
- The Flexible Tales are labelled and are factory fitted, there is no need to remove from Mixer Body.
- Apply a small amount of Sealant to the under side of the Hob Mixer Flange to seal the Mounting Surface.
- Lower the Hob Mixer through the Mounting Surface.
- Note: The "FRONT" label must be positioned to face the user.
- Working from underneath, fit the Clamping Ring over the Mixer Body. Align and secure the Clamping Plate to the Mixer Body by tightening the 4 Screws (4mm Allen Key).
- Secure the Mixer to the Mounting Surface by tightening the 2 Jacking Screws using a 5mm Allen Key (tighten well).
- Fix the Hot and Cold Hoses to 1/2" BSP Water Connections.
- Note: Stop Cocks are recommended.
- Attach the "MIXED WATER HOSE" to the Outlet/Spout.
- Note: Flexible Hoses are not to be connected behind the wall. Connections must be accessible.
- Once all connections are made allow Water Flow and check function of the Mixer.
- Check for leaks.

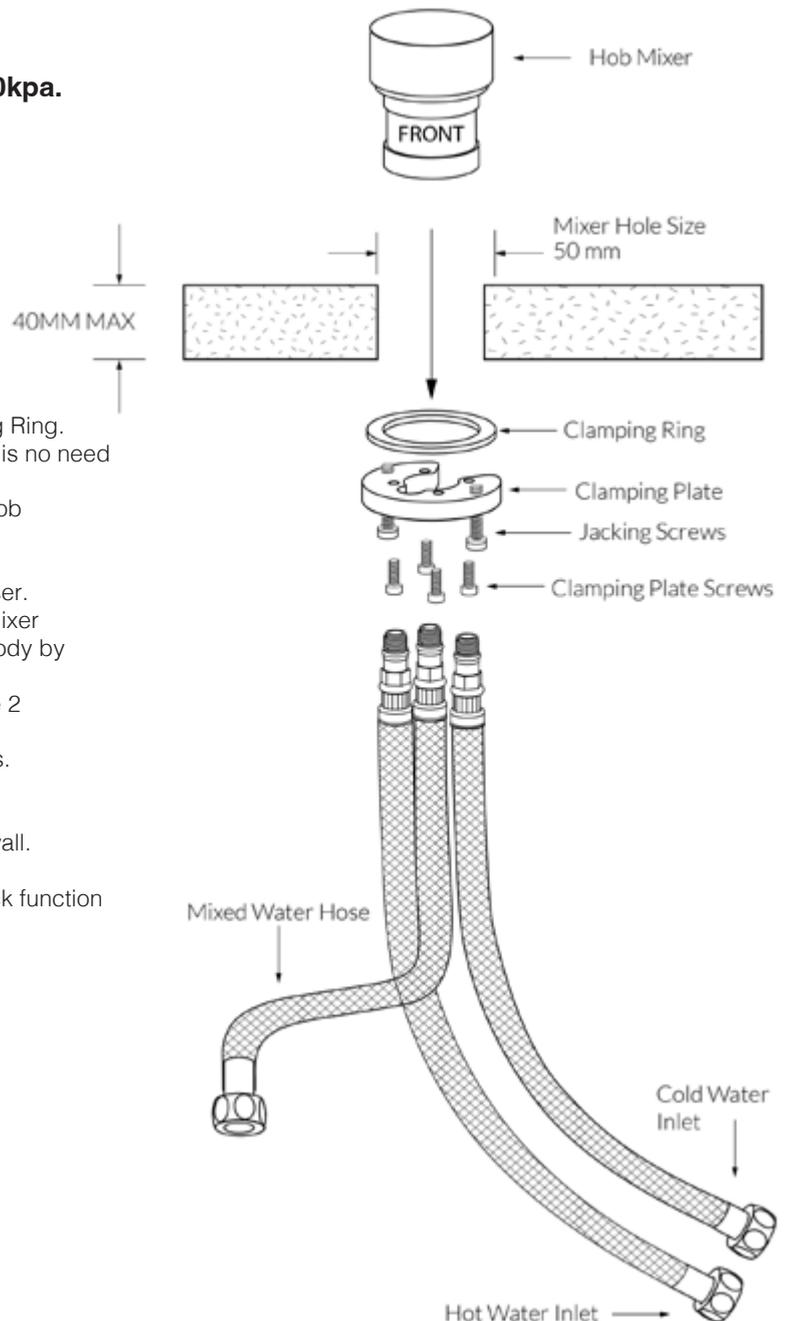

Plumbers, please ensure a copy of the Installation Instructions are left with the end user for future reference