Caroma

CI/SfB |(74.8) | n6 | Date February 2015

Supersedes all previous issues

9.11.1

Urbane Back-to-Wall

Acrylic Bath

Nominal Size: 1675mm x 775mm x 570mm



Caroma

Acrylic Bath

Nominal Size: 1675mm x 775mm x 570mm

Urbane Back-to-Wall



Ideal for small spaces, yet spacious and comfortable enogh for two. The Urbane Back-to-Wall bath ensures a relaxing soak. Complete the look with matching Urbane basins and toilet suites.

1675mm long x 775mm wide x 570mm deep – standard Code No.UR7WFW

Durability: Sanitaryware grade acrylic resists chipping, will not rust and has excellent

heat retention properties. Its high gloss finish has natural slip resistance. Minor scratch marks can be removed with gentle metal polishes, such as

Brasso.

Waste Outlet: The reinforced waste outlet is suitable for 40mm diameter standard waste

assembly.

Bath Capacity: 360 litres

Installation: The bath is suitable for back-to-wall freestanding bath installations. *Refer to*

installation instruction for further installation information.


Colours: White only.


Dimensions: All dimensions are in millimetres and are subject to normal manufacturing


Flexible Connector Installation

variations. Caroma pursues a policy of continuing improvement in design and performance of its products. The right is therefore reserved to vary


specifications without notice.



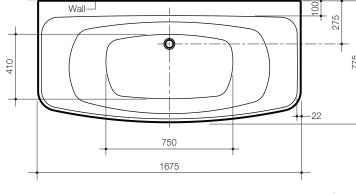




Apply silicone around the bath base surrounding, leaving a 20mm gap in an inconspicuous position



Foot Installation to Footlocker



Slide the bath into position for the back feet to glide under and into the footlockers. Make sure that the flexible connector is not kinked upward upon installation, as this will result in drainage issues.