


# Memo Sia Sensor Gooseneck Sink Mixer Tap Dual Function (4 Star)

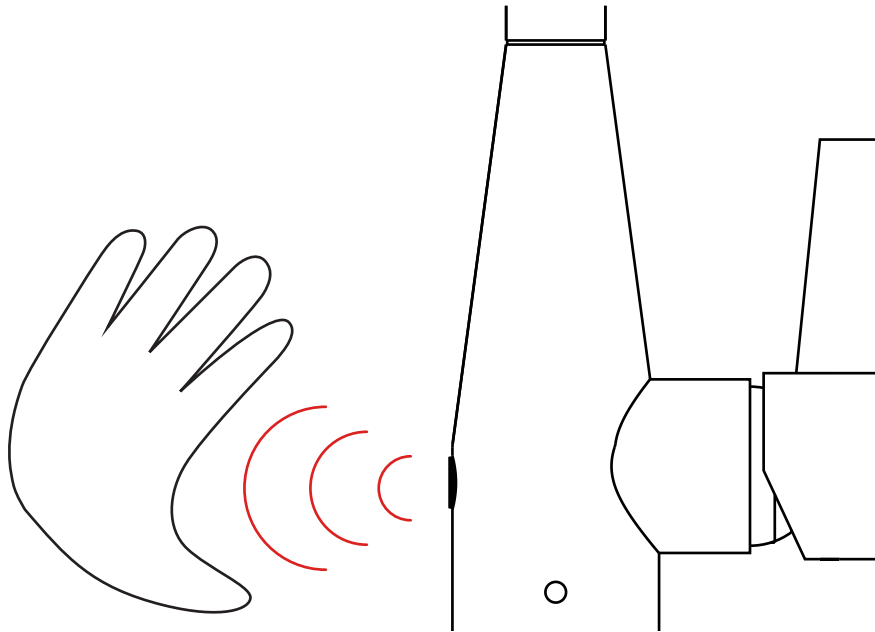

## TAP OPERATION

1. The HOT/COLD mixer handle operates as normal. It does not control the temperature of the auto water line.
2. The auto water line temperature is controlled through the installation. Either cold or warm water can be provided. Refer to Installation Instructions.
3. To activate auto water line, place hand in front of sensor momentarily (within 60mm) - water will flow from outlet.
4. Water flow can be stopped, within a 10 second period, by waving hand in front of sensor momentarily.
5. If left for 10 seconds, water will cease automatically.

**Plumbers, please ensure a copy of the Installation Instructions are left with the end user for future reference**