# UNILIFT AP 35B & 50B





HEAVY DUTY, SUBMERSIBLE STAINLESS STEEL GREY WATER PUMP

#### **WATER SOURCE**



#### **APPLICATION**



- Highly corrosion resistant stainless steel construction inside and out
- Ideal for draining dirty storm water or grey water with larger fibrous particles
- Can be easily dismantled for cleaning and can be installed with auto-coupling kit (sold separately) for simple maintenance
- · Easy submerged installation plug & pump Connect to the pipework, plug into a power outlet and you're ready to pump



**UNILIFT AP 35B** 

## **MAXIMUM PARTICLE SIZE**

It's a good idea to check your water source to make sure it doesn't contain dirt, fibres, plant or other material that is larger than 35 mm (AP 35B). If you require a drainage pump capable of larger particle sizes, up to 50 mm the AP 50B is recommended.

If you need to handle particles larger than 50 mm, please speak to your authorised Grundfos dealer.



# **CONTROL & PROTECTION FEATURES**



## **FLOAT SWITCH**

External float that either turns your pump on or off based on the water level - this prevents overflowing and dry-running.



### **SELF-COOLING MOTOR**


only partially submerged.



# FIND SPACE FOR YOUR PUMP

If you are planning to install the UNILIFT AP 35B & AP 50B in a drainage pit and will rely on the float switch to automatically start and stop your pump, a minimum amount of space in the pit is required for free movement of the float.

See below pit dimensions:

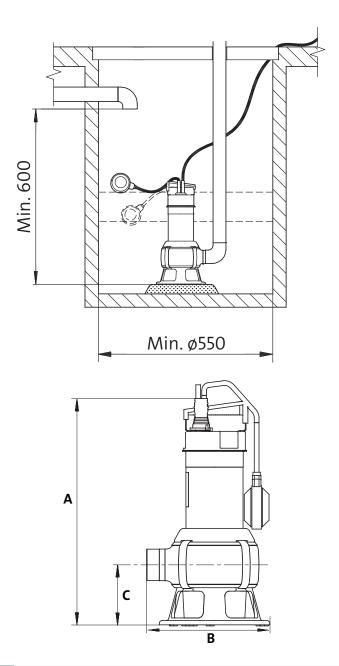

Model	Connection	Dimensions (mm)		
	Outlet	A (h)	B (w)	C (Outlet)
UNILIFT AP 35B.50.06.A1 V	2" Female	443	234	116
UNILIFT AP 35B.50.08.A1 V		468	234	116
UNILIFT AP 50B.50.08.A1 V		468	234	116
UNILIFT AP 50B.50.11.A1 V		468	234	116
UNILIFT AP 50B.50.15.A1 V		468	234	116
UNILIFT AP 50B.50.11.3 V		468	234	116
UNILIFT AP 50B.50.15.3 V		468	234	116

