


# KADO

## LUX SHOWER CHANNEL - TILE INSERT FIXED LENGTH

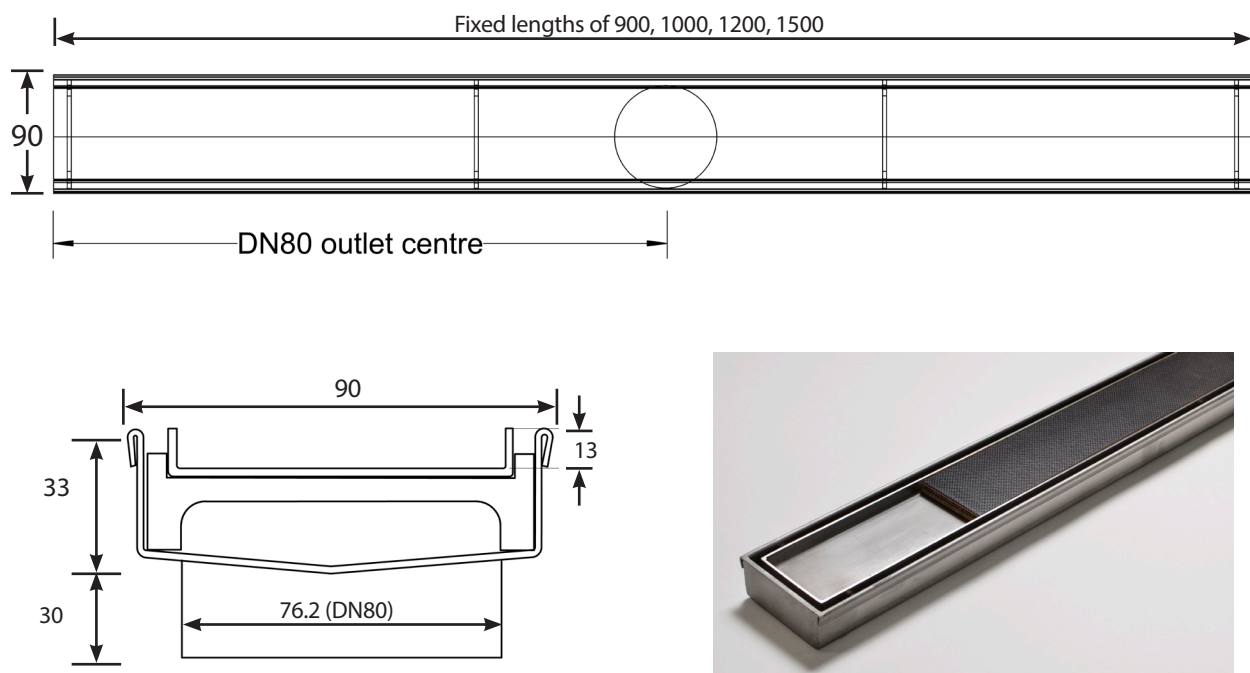

Dimensions are nominal measurements only.

### SPECIFICATIONS

<b>Recommended use</b>	Domestic, Hotel and Commercial
<b>Length</b>	900mm 1000mm 1200mm 1500mm
<b>Material</b>	316 marine grade stainless steel
<b>Colour availability</b>	Satin stainless
<b>Waste</b>	DN80
<b>Features</b>	Fully finished welded ends, centre outlet 3mm thick heavy wall tile insert tray. 'One drain for whole bathroom' compliant DN80 outlet, easy clean grate.
<b>Compliance</b>	WaterMark 21254, heel safe, child safe
<b>Sustainability</b>	Global GreenTag, Level A Gold

To see the complete KADO range go to  
[www.reece.com.au/bathrooms](http://www.reece.com.au/bathrooms)

### CLEANING RECOMMENDATIONS

We recommend the use of soapy water or approved cleaners.


This product should not be cleaned with abrasive materials.

Damage caused by any improper treatment is not covered by the product warranty. Refer to Warranty Conditions.



KADO

# LUX SHOWER CHANNEL - TILE INSERT FIXED LENGTH

## INSTALLATION

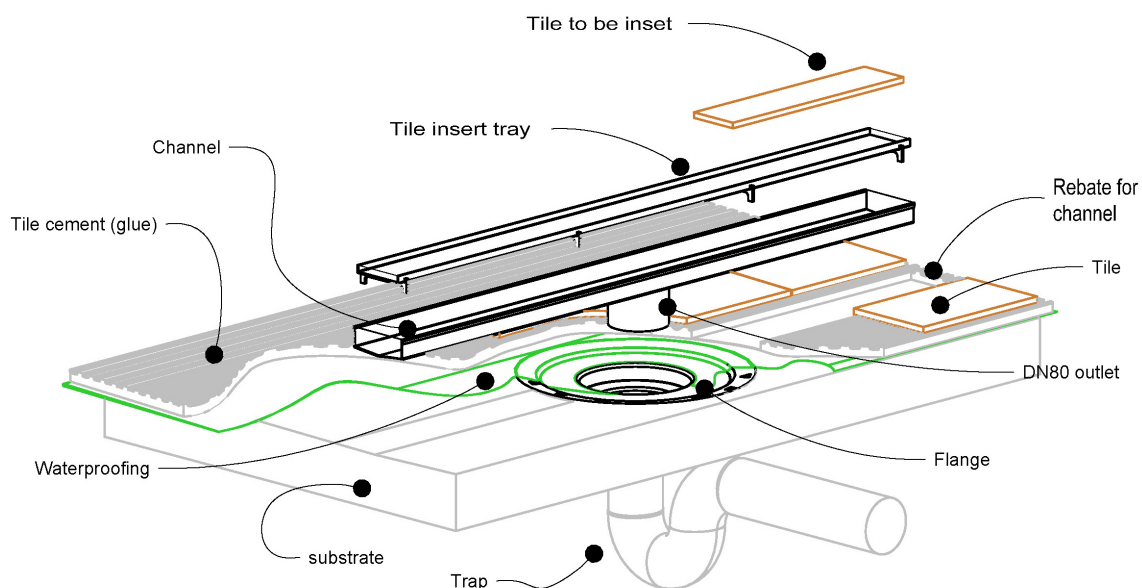

NOTE, this method require the channel system to be ABOVE and SEPARATE from the waterproofing

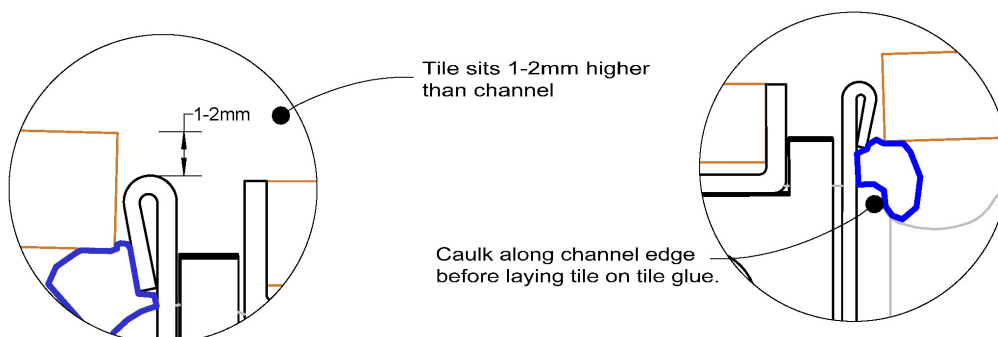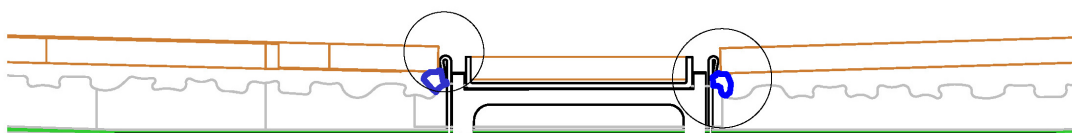

- Ensure the channel is completely level
- Cut the tile 1mm narrower than the tile insert tray, i.e. 65mm.
- Ensure the inserted tile joints line up with the tile joints
- Using tile adhesive set the tile into the tile insert tray.



Installation and preparation of the shower or bathroom floor should be as per AS3500 and AS3740.

There are variations of acceptable installations in different jurisdictions around Australia. Check with your local regulator if you are unsure of your local requirements.

Only WaterMark certified products are allowed to be installed. Products without WaterMark certification will be deemed non compliant and removal will be required. This will likely be expensive and time consuming.

**Don't risk it, use a licensed plumber.™**