


MILLI EDGE MK2 FLOOR BATH MIXER



Dimensions are nominal measurements only.

SPECIFICATIONS	
Recommended Use	Domestic, Hotel and Commercial
Colour Availability	Chrome
Pressure Rating	Maximum continuous operating pressure 500 kPa. Note: For best performance and longer life, we recommend 150-500 kPa.
Temperature Rating	Maximum continuous working temperature 75°C
Suitable Hot Water	Storage Tank: Yes Continuous Flow: Refer to manufacturer of continuous hot water systems Gravity Feed: No
Standards	AS/NZS 3718

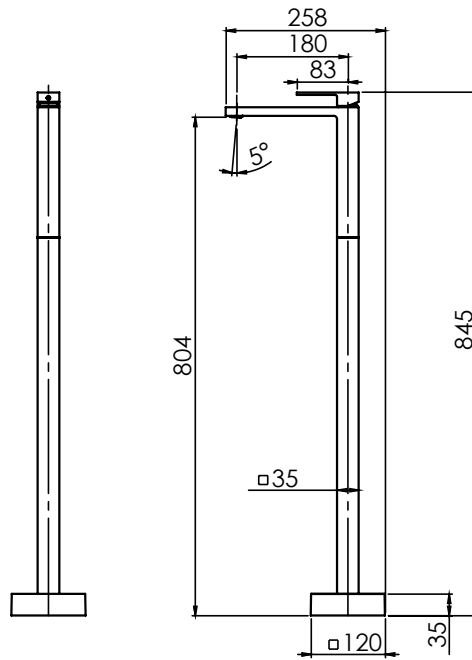

To see the complete MILLI range go to www.reece.com.au/bathrooms

CLEANING RECOMMENDATIONS

We recommend the use of soapy water or approved cleaners.

This product should not be cleaned with abrasive materials.

Damage caused by any improper treatment is not covered by the product warranty- refer to Warranty Conditions.



Disclaimer: Products in this specification manual must by regulation be installed by licensed and registered trade people. The manufacturer/distributor reserves the right to vary specifications or delete models from their range without prior notification. Dimensions are nominal measurements only. Dimensions and set-outs listed are correct at time of publication however the manufacturer/distributor takes no responsibility for printing errors.

Tech Page Version 1



MILLI EDGE MK2 FLOOR BATH MIXER

INSTALLATION INSTRUCTIONS

Important Note

Mixer must be installed to the requirements of AS/NZS 3500 by a qualified plumber. Your mixer comes to you already factory assembled and tested. We do not recommend the dismantling of any internal part of the mixer. The mixers are factory tested and sealed so as to give the best performance.

INSTALLATION INSTRUCTIONS
FLOOR MOUNTED BATH MIXER
IN0342 REV A

<p>1 Option A: Recommended pit to be cast in concrete.</p> <p>Copper or flexible hose with G 1/2" Female connectors.</p> <p>PVC Tube</p> <p>100mm deep</p> <p>135 SQUARE (APPROX)</p> <p>Option B: Timber Floor Installation</p> <p>Copper or flexible hose with G 1/2" Female connectors.</p> <p>Floor board</p> <p>Floor joist</p> <p>19mm Particle board spacer</p>	<p>2</p> <p>Locate Mounting Plate over cast pit and secure with M10 Dynabolts provided.</p> <p>Tighten firmly.</p> <p>Ensure Inlet hoses are fed through opening in the Mounting Plate.</p> <p>FEED HOSES THROUGH OPENING</p>	<p>3</p> <p>Connect hot and cold hoses to the Inlet Body G 1/2" inlet connectors. Tighten firmly.</p> <p>TEST AND CHECK FOR LEAKS</p>	<p>4</p> <p>Fasten Inlet Body to Mounting Plate with 4 x M8 countersunk screws. Tighten firmly.</p> <p>Use M15 Brass Inserts supplied for testing.</p> <p>x2</p>
<p>5a</p> <p>Place Protective Cover over Inlet Body and fasten with 4 x M8 screws provided.</p>	<p>6a</p> <p>Remove Protective Cover Plate from tiled floor.</p> <p>Gently slide Dress Cover up Mixer Body.</p> <p>Fasten Mounting Flange to Mixer Body using the four M6 screws provided.</p> <p>M15 Connectors</p> <p>Special Spanner</p> <p>Inlet Body</p>	<p>7</p> <p>Use M8 screws to secure Floor Mixer to Inlet Body and tighten firmly.</p>	<p>8</p> <p>Gently slide Dress Cover down to the tiled surface.</p>
<p>5b</p> <p>Tile up to the Protective Cover</p>	<p>6b</p> <p>Use Special Spanner provided to tighten M15 connectors to Inlet Body</p>		

recommended working pressure

150-500KPa

maximum hot water temperature

75 degrees

NOTE:

- If the pressure exceeds or is likely to exceed 550kpa, an approved pressure limiting device must be installed.
- Flush out all pipe work prior to installation.
- If the water temperature exceeds 75°C, an approved tempering valve must be fitted.
- Installation should comply with Australian standard AS3500.1 or relevant local authority requirements.
- Showers may not be suitable for use within:
 - Gravity-fed water systems
 - Some instantaneous hot water systems; or

• Pressure supply less than 150kPa.
NOTE: The 500kPa maximum water supply pressure does not apply to fire service outlets.

Failure to comply with the above may void all warranties.

WARRANTY:
Please refer to the full warranty statement enclosed with the product before installing.

MAINTENANCE AND CARE:

- Products should be cleaned with mild liquid detergent or soap and water.
- Do not use cream cleaners or citrus based cleaning products, as they are abrasive.
- Use of unsuitable cleaning agents may damage the surface. Any damage caused in this way will not be covered by warranty.

DISCLAIMER:
While we aim to ensure the specifications shown are correct at the time of printing, we reserve the right to make modifications without prior notice. Always use the physical product measurements for mark-ups and roughing-in as the line drawing shown may differ from the actual product over time.

*All measurements are shown in millimeters.

Plumbers, please ensure a copy of the installation instructions is left with the end user for future reference

