



www.franke.com/ae/en/ws

MATERIALS:

1. SS304 Grade Stainless steel; all the surfaces have satin-finish.


INSTALLATION GUIDELINES:

- 1. Use the keys provided to open the door of the soap dispenser unit.
- 2. Place the unit on the wall and mark the exact point and the mounting hole distance.
- 3. Drill mounting holes on the wall using the reference marked dots
- 4. Fix the plastic dowel in to the hole and make sure they are flushed with the wall.
- 5. Now place the unit on the wall and install the screws into the mounting holes.
- 6. After finishing if the unit is loose, make sure the screws are all the way in and the screw heads are the only visible parts.

REPLACEMENT PARTS:

- 1. Lock and key set- 2000103362
- 2. Soap pump & tank (ZEXOS618K conversion kit)- 2030022956

NOTE:

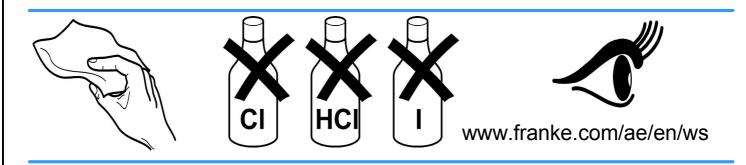

Franke L.L.C P.O. Box 14511 Ras Al Khaimah / United Arab Emirates t: +971 (0)7 2034 700 e: ws-info.ae@franke.com

