
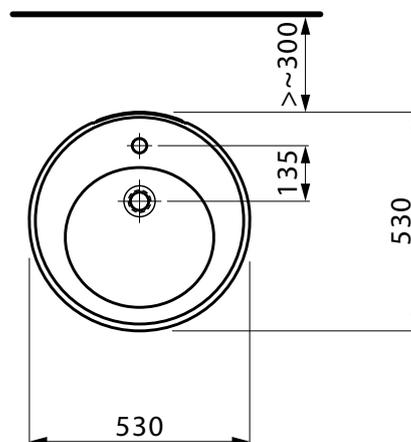


LAUFEN

ILBAGNOALESSI One

FREESTANDING BASIN 530

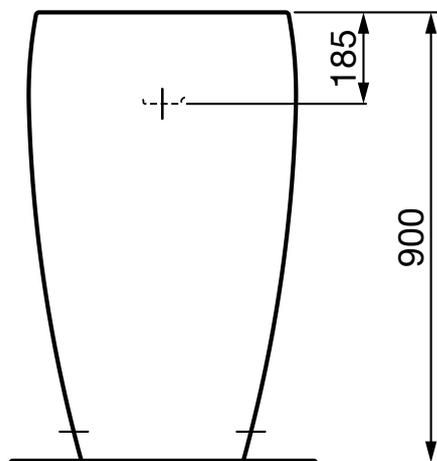

Dimensions are nominal measurements only.

The above dimensions are in millimetres.

SPECIFICATION

Recommended use	Domestic, Hotel or Commercial
Material	Fine Fire Clay
Finish	LAUFEN Clean Coat
Colour	White
Weight	43.6kg
Capacity	5.4 litres
Taphole availability	0 or 1 taphole
Integrated Overflow	No
Plug & waste	Suits 32 x 40mm non-overflow waste (Not included)
Fixing	Bolted to the Floor using fixing set supplied.



To see the complete LAUFEN range go to
www.reece.com.au/bathrooms

CLEANING RECOMMENDATIONS

We recommend the use of soapy water or approved cleaners.

This product should not be cleaned with abrasive materials.

Damage caused by any improper treatment is not covered by the product warranty. Refer to Warranty Conditions.

Disclaimer: Products in this specification manual must by regulation be installed by licensed and registered trade people. The manufacturer/distributor reserves the right to vary specifications or delete models from their range without prior notification. Dimensions are nominal measurements only. Dimensions are nominal measurements only. Dimensions and set-outs listed are correct at time of publication however the manufacturer/distributor takes no responsibility for printing errors.



Tech Page Version 2

LAUFEN
Bathroom Culture since 1892  www.laufen.com

reece™

LAUFEN ILBAGNOALESSI One FREESTANDING BASIN 530

SPARE PARTS

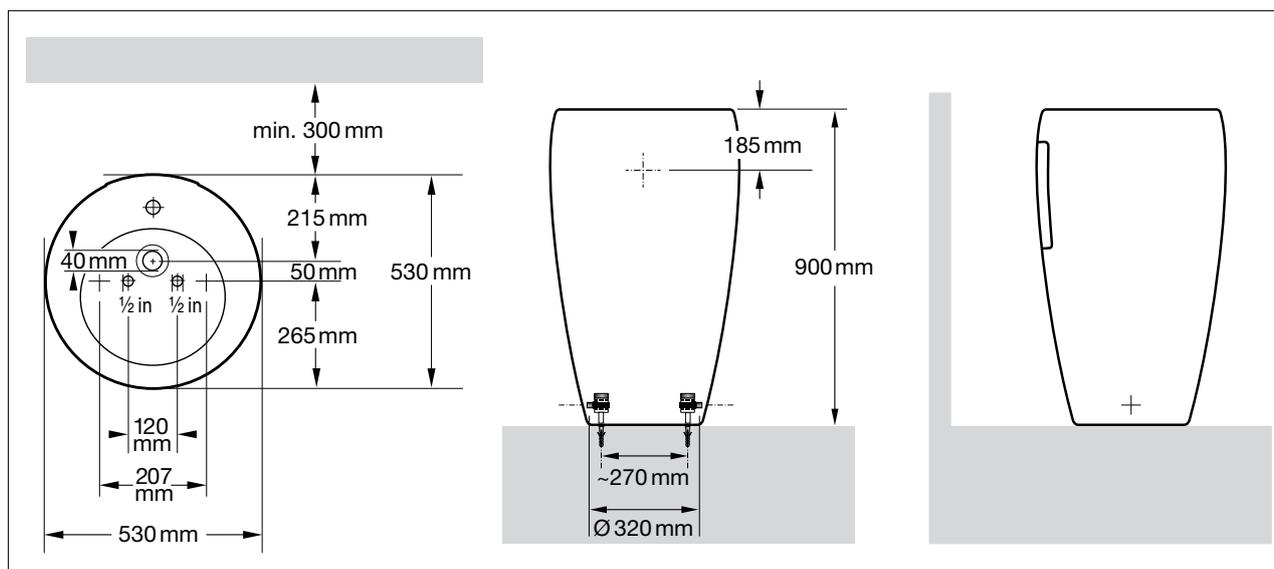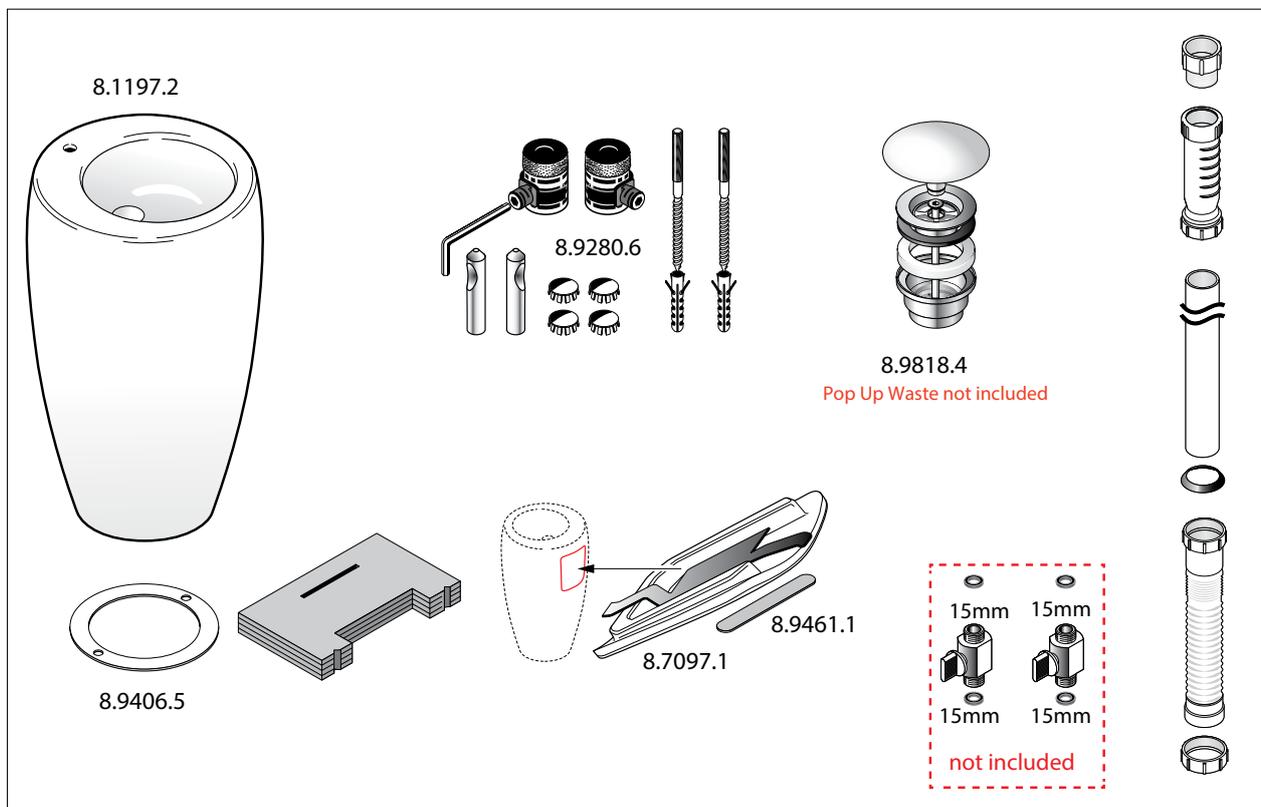

Plumbers, please ensure a copy of the installation instructions is left with the end user for future reference

LAUFEN







ILBAGNOALESSI One

FREESTANDING BASIN 530

INSTALLATION INSTRUCTIONS





Assembly procedure

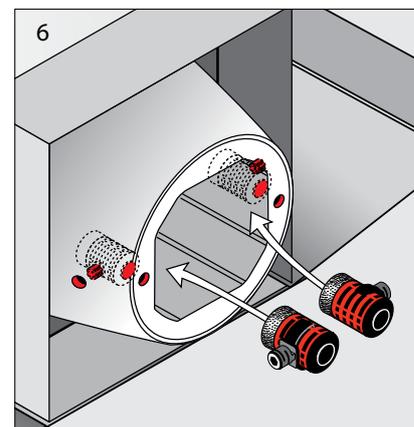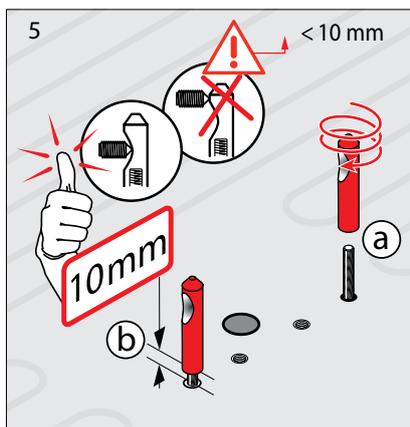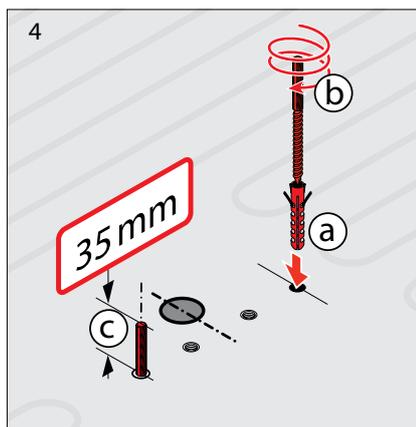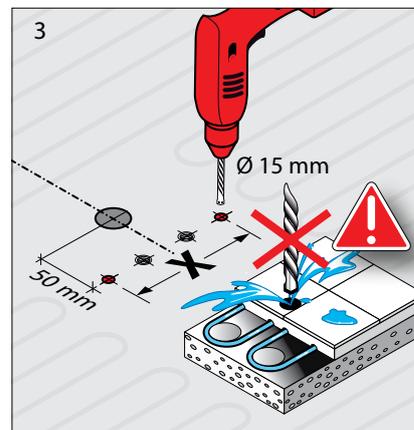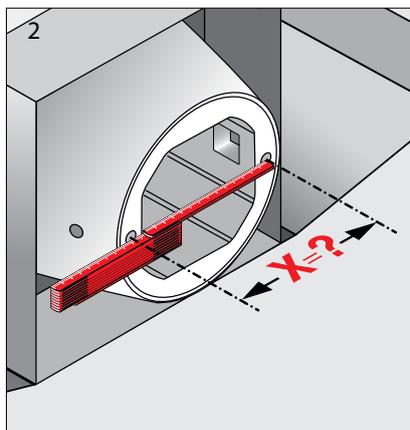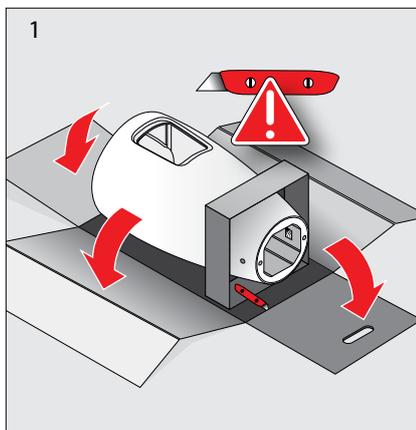

Fastening material

For 1 Tap Hole version

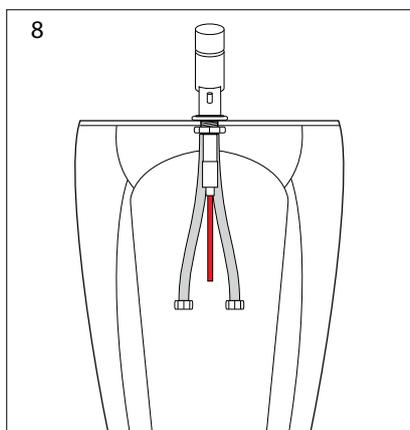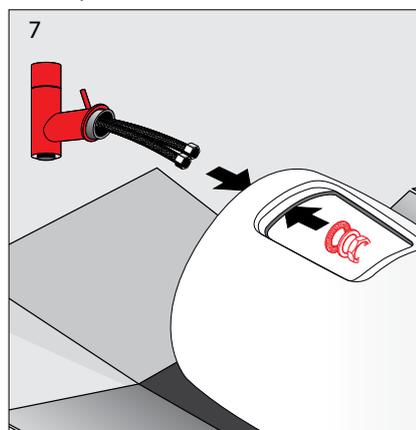

Note:

For no taphole version where wall mount tapware is used, consideration to be made to height positions and length of outlet.

LAUFEN

ILBAGNOLESSI One

FREESTANDING BASIN 530

Please note: modified waste set up to suit Australian plumbing requirements



Fig. 1: Basin with waterless trap (provided) connection to 40mm trap adaptor (provided) through access cavity.



Fig. 3: Access under basin showing connection of flexible waste hose (provided) to 40mm PVC DWV in floor



Fig. 2: Parts required between waterless trap and 40mm PVC DWV in floor.

LAUFEN


ILBAGNOALESSI One

FREESTANDING BASIN 530




INSTALLATION INSTRUCTIONS



Assembly procedure


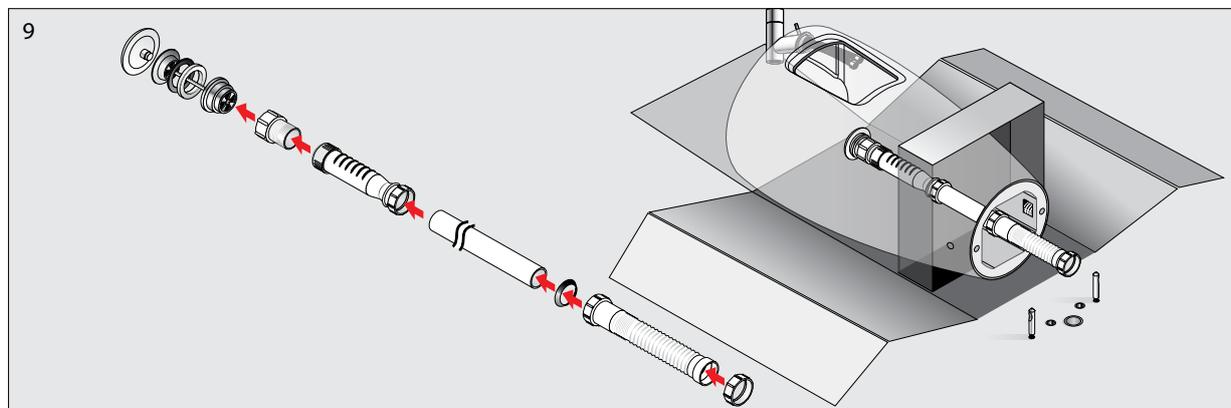


Use components as required by local plumbing regulator

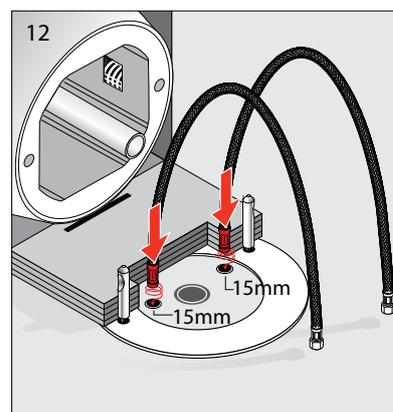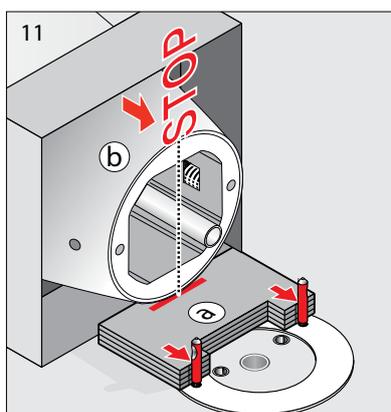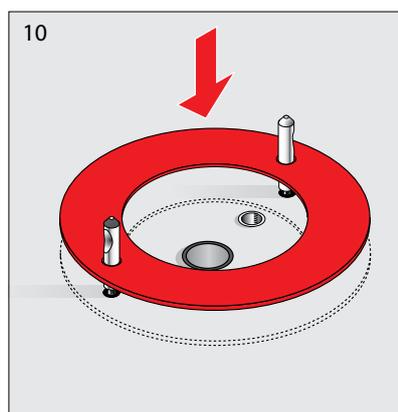

LAUFEN IL BAGNO ALESSI ONE FREESTANDING BASIN 530

Please note:
modified waste set up
to suit Australian
plumbing requirements

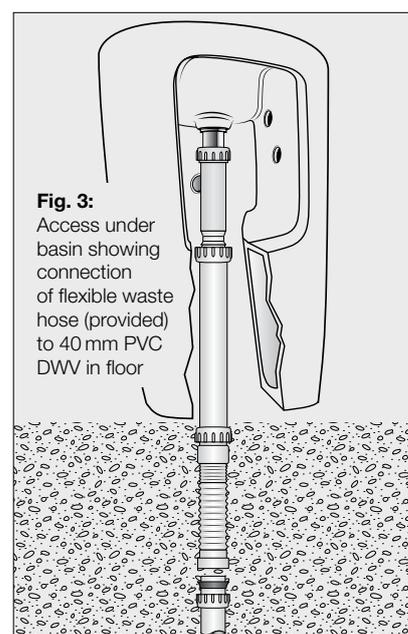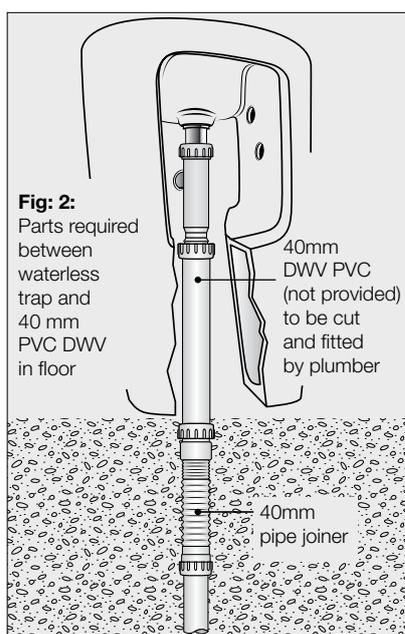

LAUFEN


ILBAGNOLESSI One

FREESTANDING BASIN 530

INSTALLATION INSTRUCTIONS



Assembly procedure

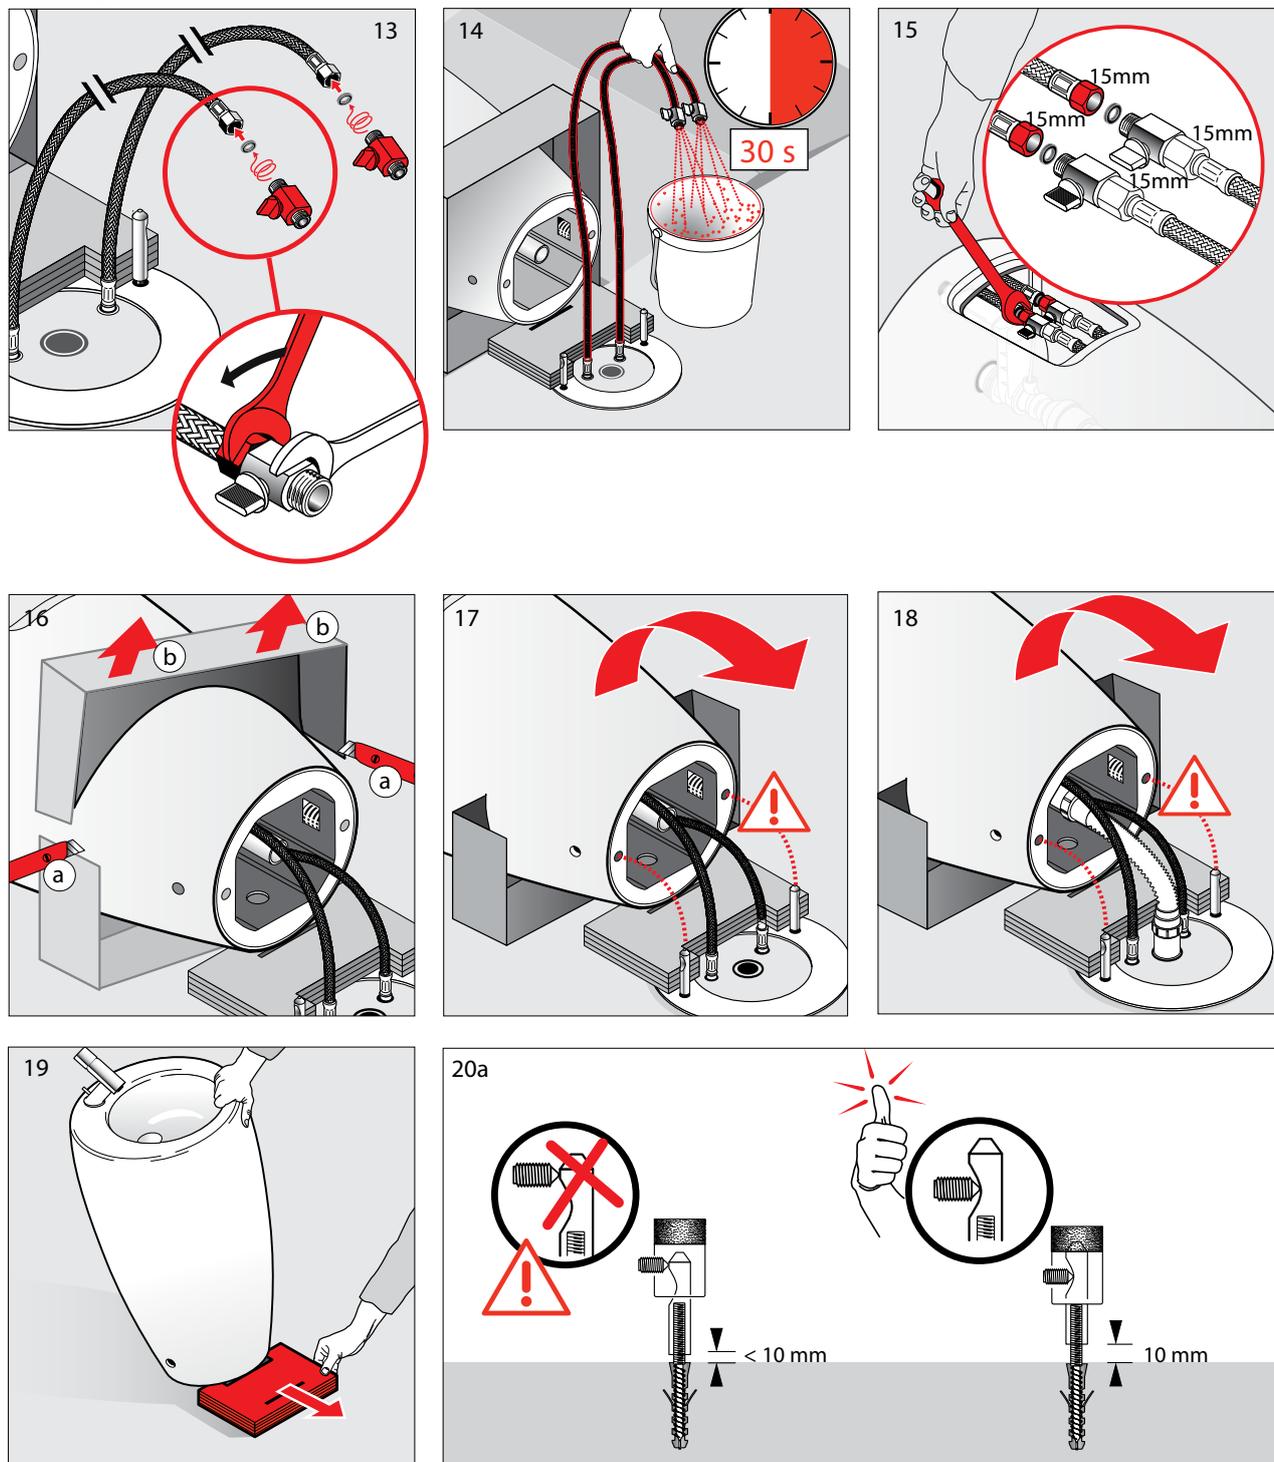








LAUFEN

ILBAGNOLESSI One

FREESTANDING BASIN 530

INSTALLATION INSTRUCTIONS

Assembly procedure

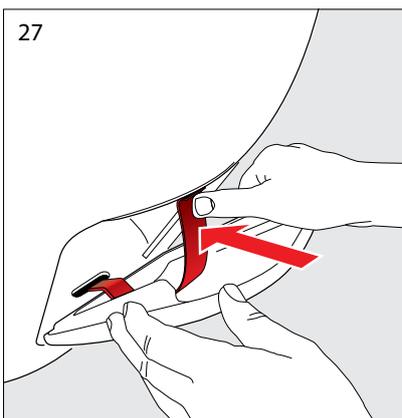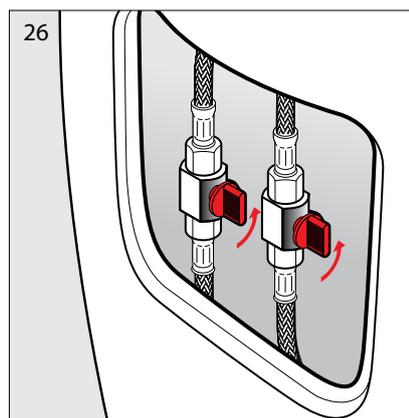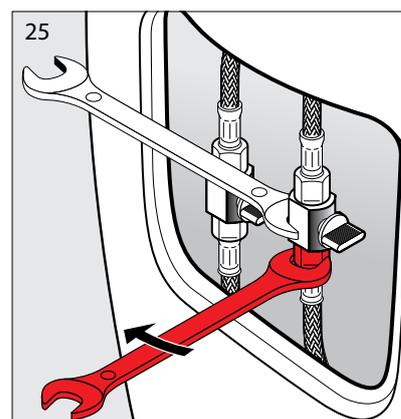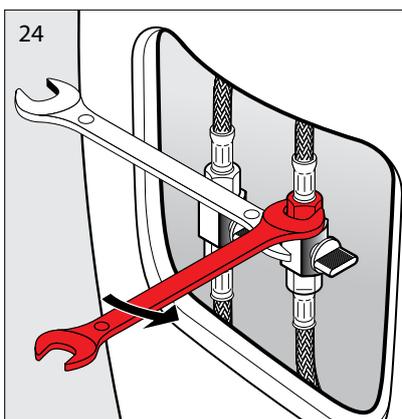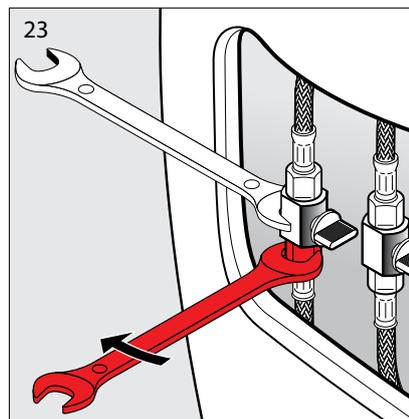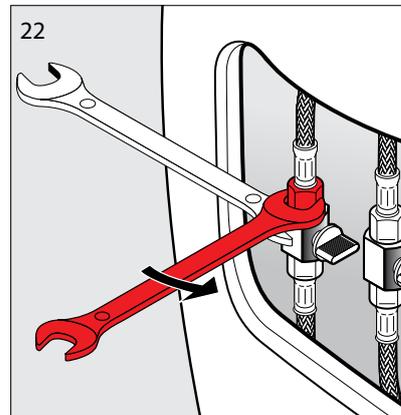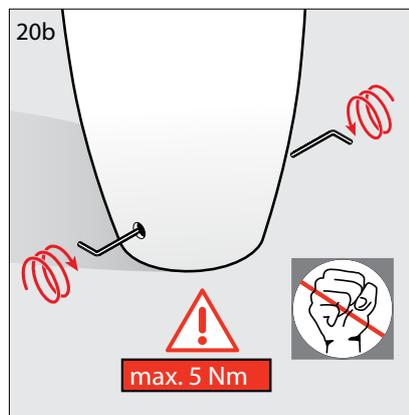

LAUFEN


ILBAGNOALESSI One

FREESTANDING BASIN 530



INSTALLATION INSTRUCTIONS





Assembly procedure

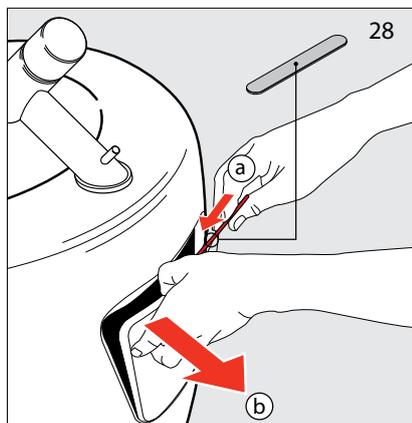

Stripping down

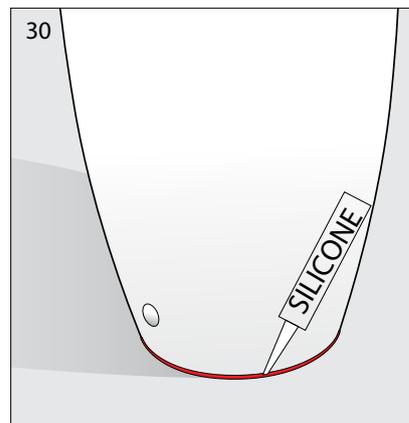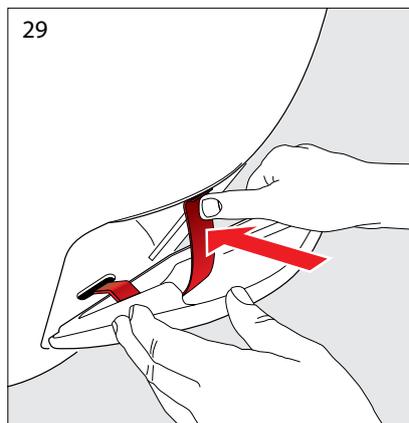

Maintenance instructions

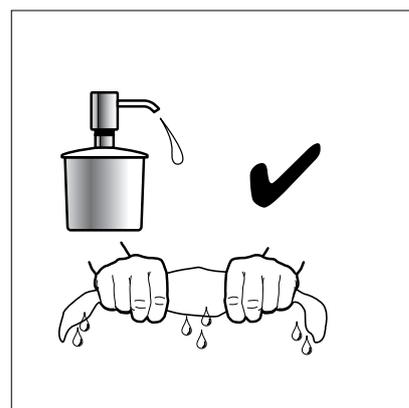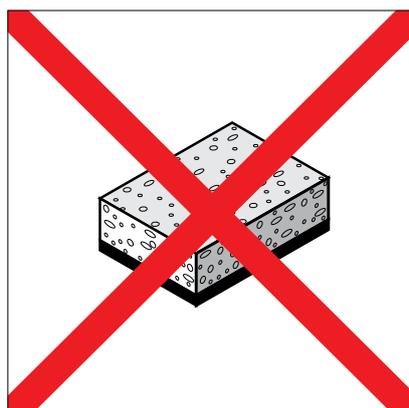

The surface is simple to clean and care for. The smooth surface hardly accumulates any dirt. Use soft cloth, soapy solution and water for regular care. Wipe with a dry cloth. Avoid the use of abrasives or solvents, which damage the surface. Damage caused by inappropriate treatment by the user, is not covered by our guarantee.