
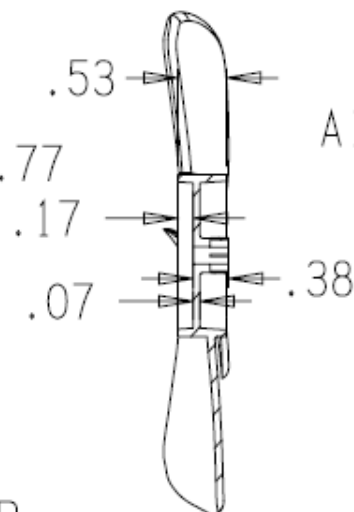



DATE	REV	ECRN #	REV. DESCR.
06-20-11	C	2636	DWG. UPDATE FROM SOLID MODEL

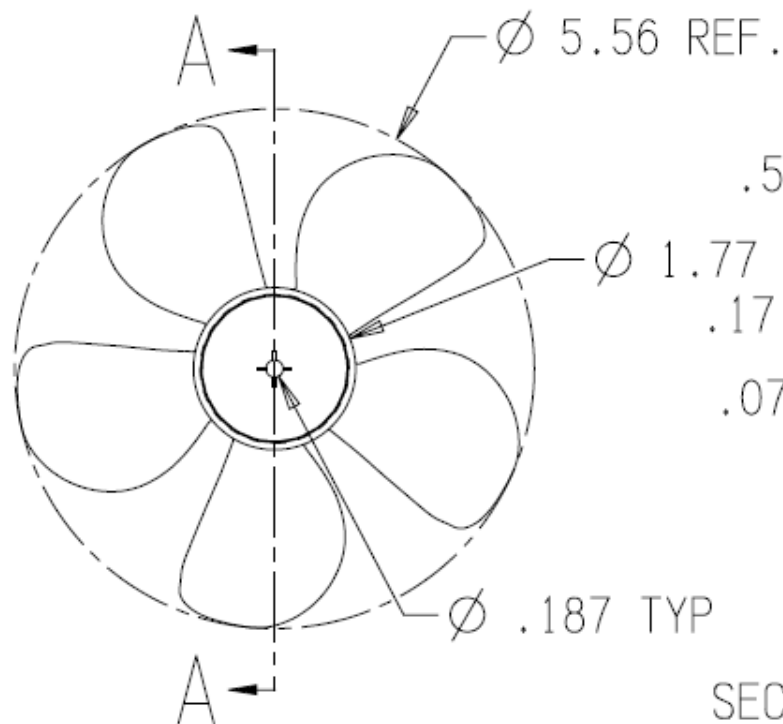



SECTION A-A

CCW ROTATION

AIR FLOW

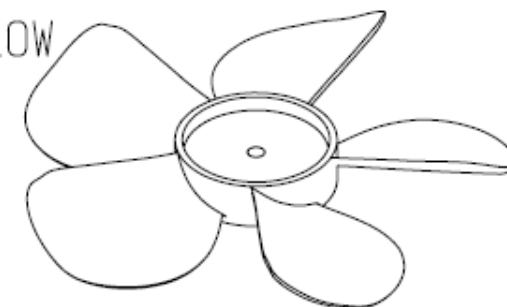

DISCHARGE SIDE

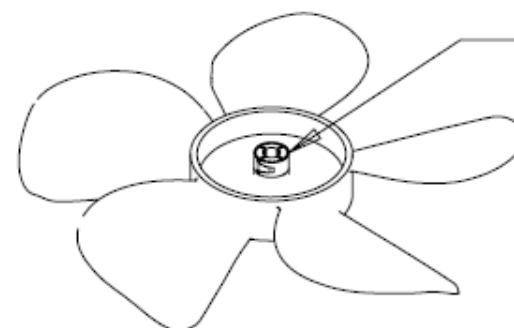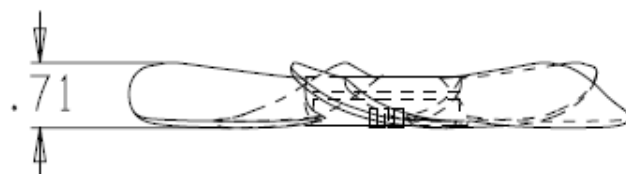

CR-1 COMP. RING

INTAKE SIDE

NOTES:

1. ALL DIMENSIONS IN INCHES & NOM.
2. REVERSE HUB.
3. USE CR-1 COMP. RING.

APPROVED DRAWING ONLY IF PRINTED ON YELLOW PAPER AND MARKED WITH RED STAMP	DIMENSIONING & TOLERANCING
UNLESS OTHERWISE SPECIFIED: TOLERANCES:	.XXX ± .015
○ - CRITICAL TO QUALITY	.XX ± .03
▽ - FIRST PIECE INSPECT	

APPROVED BY: SRJ
DATE: 05-31-11
CHECKED BY: JK
DATE: 05-31-11
DRAWN BY: SRJ
DATE: 05-27-11

TITLE: 5.56 CCW 5 BLADE FAN - REV. HUB			
COLOR: BLACK			
BALANCE: .008 OZ - IN. MAX.			
AXIAL RUNOUT: .056" T.I.R. MAX.			
RADIAL RUNOUT: .056" T.I.R. MAX.			
MATERIAL: UL94-HB 20% TALC FILLED POLYPROPYLENE			
TPP1820HBBK OR APPV'D EQUIV.			
INSERTION FORCE: 15 - 40 LBF			
SHAFT DIMENSION: .187" Ø			
ECRN NO.	2636	DWG NO.	5562CC187RH5TP2
SCALE	NONE	CADKEY	SHEET 1 OF 1

REV C