Inset Flushing Sink

WaterMark
WM-022665
WMTS 526
BRITEX LDUS-A, LDUS-B, FLF2
Match with Zurn Push Valve ZH-6102XL 4.5L

FLI2

Scan QR code to view our installation notes

FLI2
Conical Bowl

To order this item please advise:

- Bowl shape: conical (FLF2)
- Bowl size: 350mm Dia. or custom
- Waste size: 100mm
- Grade of stainless: 304 or 316

Product Info:

- Hygienically disposes liquid & solid waste
- Concealed internal flushing bowl rim
- Suits mounting in bench top (by others)
- Manufactured to custom sizes
- Choice of conical or square bowl

FLI 2 CONICAL Bowl Sizes
Ø300
Ø350
Ø400
Ø450
Ø500
custom-consult BRITEX

**** For suggested tapware please see previous page FLF***

INSTALLATION NOTES

1) Water connection for bowl is located below bench top. **2)** Water supply to 25mm BSP connection on flushing bowl should be minimum 3/4" and 250kPa (500kPa max) to ensure bowl flushes solid waste adequately. (1/2" for liquid waste only) **3)** Where 100mm outlet is requested, a 101mm OD stainless tube dropper waste is supplied for connection to trap as specified by consultant (not supplied). **4)** Cut out size for bowl is 20mm less than overall dimension (including flange), which leaves a 10mm over-hang for mounting on bench top. **5)** Fixing clips are tightened to locate and secure integral studs to the inside of the cutout. **6)** A silicon sealant or adhesive tape can be applied to the underside perimeter of flange for additional sealing and securing.



FLI2

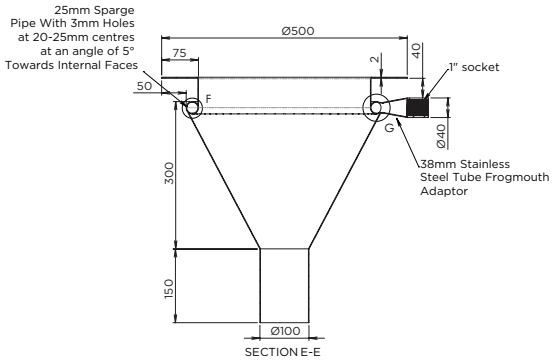

FLI2

Due to ongoing research and our commitment to product development, details are subject to change without notice. Details accurate at time of print

Please refer to britex.com.au for the most current product information.
Allow +/- 5mm tolerance for dimensions and setouts shown in product literature.

Last Revised 2020