


# MILLI AXON

## WALL TOP ASSEMBLIES

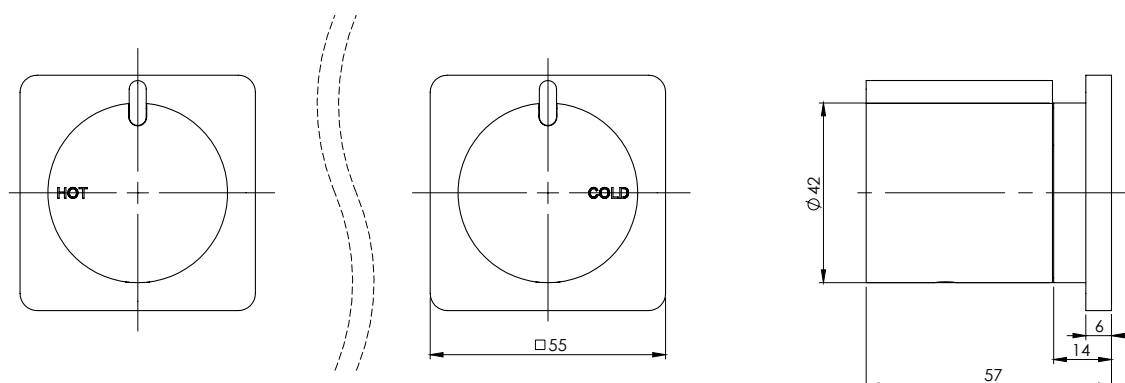

### SPECIFICATIONS

<b>Recommended Use</b>	Domestic, hotel and commercial
<b>Finish Available</b>	Chrome Handle with Chrome B/P Chrome/Black Handle with Chrome B/P Chrome/Black Handle with Black B/P
<b>Pressure Rating</b>	Maximum continuous operating pressure 500 kPa. Note: For best performance and longer life we recommend 150-500 kPa.
<b>Temperature Rating</b>	Maximum continuous working temperature 75°
<b>Suitable Hot Water</b>	Storage Tank: No Continuous Flow: Refer to manufacturer of continuous hot water systems Gravity Feed: No
<b>Standards</b>	AS/NZS 3718



To see the complete Milli range go to [www.reece.com.au/bathrooms](http://www.reece.com.au/bathrooms)

### CLEANING RECOMMENDATIONS

This product should not be cleaned with abrasive materials eg. steel wool/scourers. Damage caused by any improper treatment is not covered by the product warranty - refer to Warranty Conditions.



**Disclaimer:** Products in this specification manual must by regulation be installed by licensed and registered trade people. The manufacturer/distributor reserves the right to vary specifications or delete models from their range without prior notification. Dimensions are nominal measurements only. Dimensions and set-outs listed are correct at time of publication however the manufacturer/distributor takes no responsibility for printing errors.

Tech Page Version 1

Milli


reece

# MILLI AXON WALL TOP ASSEMBLIES


## INSTALLATION INSTRUCTIONS

Milli Axon Wall Top Assemblies INSTALLATION INSTRUCTIONS

**WATER SUPPLY REQUIREMENTS**



**Recommended Working Pressure**  
150 KPa Min.  
550 KPa Max.



**Maximum hot water temperature**  
75°

**Note:**

- If the pressure exceeds or is likely to exceed 550kpa, an approved pressure limiting device must be installed.
- Flush out all pipe work prior to installation.
- If the water temperature exceeds 75°C, an approved tempering valve must be fitted.
- Installation should comply with Australian standard AS3500.1 or relevant local authority requirements.

Failure to comply with the above may void all warranties.


**Maintenance and Care**

- Chrome plated surfaces should be cleaned with mild liquid detergent or soap and water.
- **Do not** use cream cleaners or citrus based cleaning products, as they are abrasive.
- Use of unsuitable cleaning agents may damage the surface. Any damage caused in this way will not be covered by warranty.


**1** Check seats in Recessed Breach are in good condition and are free of foreign objects.

Recommended installation range for Recessed Breach as shown in diagram.

Reseat if required.




**2** Measure the distance from Recessed Breach to Wall Surface. Check against diagram below to determine which cartridge extension to be used in step 4.

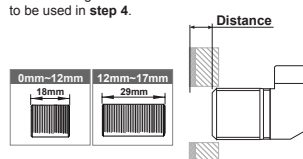


**3** Screw Cartridge into Recess until Cartridge seals with seat in Recess.

**Do not over-tighten**

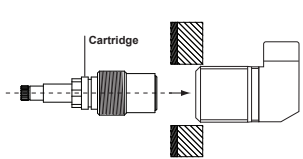


**4** Fit the cartridge extension onto the cartridge spindle.


Fasten screw.

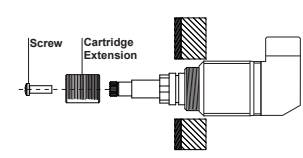


**5** Fit Red Fibre Washer around the cartridge. Fasten Bonnet onto the cartridge firmly with a spanner.

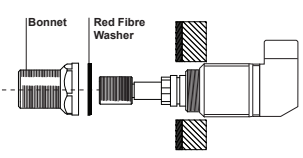


**6** Fit "O" Ring to Square Plate. Place Square Plate into position. Fasten Lock Nut to secure Square Plate.

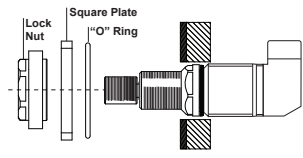


**8** Fit Nylon Washer into the groove of Lock Nut. Turn the cartridge clockwise until it stops at the "OFF" position.

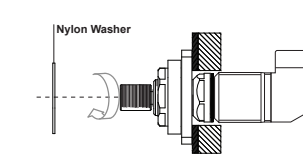

**9** Push on Handle over the cartridge extension. Fasten Grub Screw firmly, push in Screw Cap.

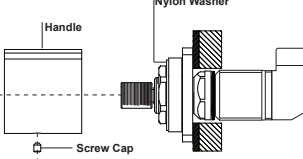

**Mixer Operation**

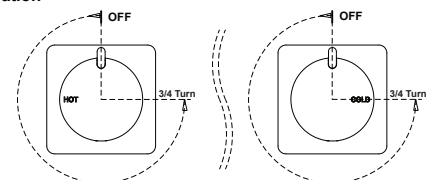

**NOTE :** The handle with hot marking must be on the left hand side as viewed from the users position.